

1 **TECHNICAL DOCUMENT TO SUPPORT**
2 **WATER RESERVATIONS FOR THE**
3 **KISSIMMEE RIVER AND CHAIN OF LAKES**

4 Draft Report

5 April 2020



6 South Florida Water Management District

7 West Palm Beach, FL

9 EXECUTIVE SUMMARY

This document summarizes the technical basis for developing the Kissimmee River and Chain of Lakes Water Reservations by the South Florida Water Management District to protect fish and wildlife. Protection of fish and wildlife means ensuring the health and sustainability of fish and wildlife communities through natural cycles of drought, flood, and population variation. The proposed Water Reservation area encompasses approximately 172,500 acres, including the following waterbodies: 1) Upper Chain of Lakes (Lakes Hart and Mary Jane; Lakes Myrtle, Preston and Joel; East Lake Tohopekaliga; Lake Tohopekaliga; the Alligator Chain of Lakes; and Lake Gentry), 2) Headwaters Revitalization Lakes (Lake Kissimmee, Cypress Lake, Lake Hatchineha, and Tiger Lake), and 3) the Kissimmee River and floodplain as well as interconnected canals.

The Water Reservations will reserve from allocation 1) all surface water in the Kissimmee River and floodplain and in the Headwaters Revitalization Lakes; 2) quantities of surface water up to established water reservation stages in the Upper Chain of Lakes; and 3) surface water and groundwater in the surficial aquifer system, within contributing waterbodies that is required for the protection of fish and wildlife.

The Headwaters Revitalization Lakes are closely associated with the performance of the Kissimmee River Restoration Project (KRRP) and have a separate federal regulation schedule intended to meet the flow requirements of the KRRP. The KRRP involves an estimated \$800 million public investment and was developed to address public concerns about the effects of the Central and Southern Florida Flood Control Project on the Kissimmee River—specifically the altered hydrology, loss of floodplain wetlands, and resulting loss of habitat and reduced populations of many species of fish and wildlife. Federal authorizations for the KRRP form the basis for reserving all surface water in the Kissimmee River and floodplain and in the Headwaters Revitalization Lakes.

This document describes how the Water Reservations were developed. All Water Reservations are adopted by rule in the Florida Administrative Code. Once the draft Water Reservation rules are in effect, they will be implemented in the South Florida Water Management District's water use permitting program to ensure future water uses will not withdraw reserved water. Direct and indirect withdrawals of water from the Kissimmee River and floodplain and the Headwaters Revitalization Lakes will be limited to existing permitted water use allocations (existing legal uses). Direct and indirect withdrawals of water from the Upper Chain of Lakes and contributing waterbodies will be limited to existing permitted water use allocations (existing legal uses) and quantities of surface water up to the proposed Water Reservation stages given in the draft Water Reservation rules, as discussed in **Chapter 5** of this document. All existing legal uses of water from the reservation and contributing waterbodies will continue to be protected after rule adoption if they are not contrary to the public interest.

42 **TABLE OF CONTENTS**

43	Executive Summary	ES-1
44	List of Tables	iii
45	List of Figures.....	iv
46	Acronyms, Abbreviations, and Units of Measurement.....	v
47	Chapter 1: Introduction	1
48	1.1 Overview and Purpose of Document.....	1
49	1.2 Reservation Waterbodies.....	1
50	1.3 Kissimmee River and Chain of Lakes Background	3
51	1.3.1 Kissimmee River Restoration.....	4
52	1.3.2 Headwaters Revitalization Project	6
53	1.3.3 Central Florida Water Initiative	6
54	1.4 Prior Work on the Kissimmee River and Chain of Lakes Water Reservations.....	6
55	Chapter 2: Basis for Water Reservations	8
56	2.1 Definition and Statutory Authority.....	8
57	2.2 Water Reservation Rulemaking Process	9
58	Chapter 3: Description of Reservation Waterbodies.....	11
59	3.1 Kissimmee Basin Overview	11
60	3.2 Surface Water Resources.....	13
61	3.3 Connectivity of the Waterbodies.....	13
62	3.4 Groundwater.....	15
63	3.5 Reservation and Contributing Waterbodies	16
64	3.5.1 Kissimmee River	18
65	3.5.2 Headwaters Revitalization Lakes.....	19
66	3.5.3 Upper Chain of Lakes	21
67	Chapter 4: Fish and Wildlife Resources and Hydrologic Requirements.....	31
68	4.1 Kissimmee River and Headwaters Revitalization Lakes.....	31
69	4.2 Kissimmee River Fish and Wildlife Resources and Hydrologic Requirements.....	32
70	4.2.1 Kissimmee River Fish	33
71	4.2.2 Kissimmee River Birds	36
72	4.2.4 KRRP and the Hydrologic Requirements of Fish and Wildlife	39
73	4.3 Headwaters Revitalization Lakes and Upper Chain of Lakes Fish and Wildlife Resources.....	42
74	4.3.1 Fish and Wildlife Resources and Habitat	42
75	4.3.2 Hydrologic Characteristics	51
76	4.3.3 Linkages Between Hydrology and Biology	52
77	Chapter 5: Methods and Analyses Used to Identify Reserved Water.....	56
78	5.1 Introduction	56
79	5.2 Rationale for Reserving All Surface Water Kissimmee River and Headwaters	
80	Revitalization Lakes	56
81	5.3 Establishment of Water Reservation Lines in the Upper Chain of Lakes	57
82	5.3.1 Approach.....	57
83	5.3.2 Seasonal High Stage.....	59
84	5.3.3 Seasonal Low Stage	59

Table of Contents

85	5.3.4	Transition Between Seasonal High and Low Stages.....	59
86	5.3.5	Specific Water Reservation Lines for Lakes.....	61
87	5.4	Impact Evaluation and Water to be Allocated.....	64
88	5.4.1	Existing Uses of Water from Proposed Reservation Waterbodies.....	64
89	5.4.2	Downstream Threshold at S-65 for the Kissimmee River Restoration Project.....	67
90	5.4.3	Lake Okeechobee Constraint for the Lake Okeechobee Service Area.....	68
91	5.5	Modeling Tool for Evaluating Future Water Use Withdrawals	69
92	5.5.1	Overview of the Upper Kissimmee – Operations Simulation Model.....	69
93	5.5.2	Sensitivity Analysis of Hypothetical Water Supply Withdrawals with Kissimmee	
94		Water Reservation Criteria.....	70
95	5.6	Summary	78
96		Literature Cited	79
97		Appendix A: Water Reservation Waterbodies and Contributing Areas	A-1
98		Appendix B: Water Proposed for Reservation.....	B-1
99		Appendix C: Documentation Report for the UK-OPS Model	C-1
100		Appendix D: Peer-Review Reports for the UK-OPS Model	D-1
101		Appendix E: 2009 Peer-Review Report	E-1
102		Appendix F: Additional Floral and Faunal Communities in the Kissimmee River and	
103		Floodplain.....	F-1
104			

105 **LIST OF TABLES**

106	Table 1-1.	Major actions and events in the planning, development, and implementation of the	
107		Kissimmee River Restoration Project.	3
108	Table 3-1.	Characteristics and potential for water yield from the hydrogeologic layers of the	
109		groundwater system in the Kissimmee Basin.	15
110	Table 3-2.	Stage, surface area, volume, average depth, and maximum depth for the Upper	
111		Chain of Lakes reservation waterbodies.	21
112	Table 4-1.	Descriptions of the four major vegetation community types analyzed within the	
113		proposed reservation waterbodies for elevation distributions. Approximate	
114		hydroperiods are included for general reference.	43
115	Table 4-2.	Fish species in six of seven proposed reservation waterbodies.	46
116	Table 4-3.	Aquatic amphibians and reptiles likely to occur in the Kissimmee Chain of Lakes.	
117		Taxa in bold are known to occur in the littoral zone of Lake Tohopekaliga.	48
118	Table 4-4.	Breeding birds associated with proposed lake reservation waterbodies.	50
119	Table 5-1.	Surficial aquifer system wells near the reservation waterbodies.	65
120	Table 5-2.	Surface water pumps near the reservation waterbodies.	67
121	Table 5-3.	Lake Tohopekaliga water supply reliability for the WSmax scenario.	76
122	Table 5-4.	Lake Tohopekaliga water supply reliability for the WSmaxL scenario.	77
123			

124 **LIST OF FIGURES**

125	Figure 1-1.	Kissimmee River and Chain of Lakes Water Reservation waterbodies.	2
126	Figure 1-2.	Map of the area being restored by the Kissimmee River Restoration Project.	5
127	Figure 2-1.	Water Reservation rule development process.	10
128	Figure 3-1.	Map of the Upper and Lower Kissimmee Basins.	12
129	Figure 3-2.	Flow of water through the Kissimmee Chain of Lakes.	14
130	Figure 3-3.	Reservation and contributing waterbodies associated with the Kissimmee River	
131		and Chain of Lakes Water Reservations.	17
132	Figure 3-4.	Kissimmee River reservation and contributing waterbodies.	18
133	Figure 3-5.	Headwater Revitalization Lakes reservation and contributing waterbodies.	20
134	Figure 3-6.	Lakes Hart-Mary Jane reservation waterbody (no contributing waterbodies	
135		present).....	22
136	Figure 3-7.	Lakes Myrtle-Preston-Joel reservation waterbodies (no contributing waterbodies	
137		present).....	23
138	Figure 3-8.	Alligator Chain of Lakes reservation and contributing waterbodies.	25
139	Figure 3-9.	Lake Gentry reservation and contributing waterbodies.	26
140	Figure 3-10.	East Lake Tohopekaliga reservation and contributing waterbodies.	28
141	Figure 3-11.	Lake Tohopekaliga reservation and contributing waterbodies.	29
142	Figure 4-1.	Schematic representation of modified macrohabitat guild structure.....	35
143	Figure 4-2.	Relationship between fish/wildlife and flow or stage.....	41
144	Figure 4-3.	Approximate elevations of common vegetation community types for the proposed	
145		reservation waterbodies Lakes Hart-Mary Jane, Lakes Myrtle-Preston-Joel,	
146		Alligator Lake (representative of the Alligator Chain of Lakes), and Lake Gentry.	44
147	Figure 4-4.	The interquartile ranges (25 th to 75 th percentiles) of daily lake stages before (blue,	
148		1942 to 1962) and with (green, 1964 to 2019) regulation for Lake Tohopekaliga.	51
149	Figure 4-5.	The difference between median daily lake stages (May 1972 to April 2019) and	
150		each reservation waterbody's current regulation schedule.	52
151	Figure 5-1.	Water reservation hydrographs for the Lakes Hart-Mary Jane, Lakes	
152		Myrtle-Preston-Joel, and the Alligator Chain of Lakes reservation waterbodies.	62
153	Figure 5-2.	The Restricted Allocation Area rule boundary for the Lake Okeechobee Service	
154		Area.....	69
155	Figure 5-3.	East Lake Tohopekaliga regulation schedule (black line) and a draft water	
156		reservation line (red dashed line).....	70
157	Figure 5-4.	Lake Tohopekaliga regulation schedule (black line) and a draft water reservation	
158		line (red dashed line).....	71
159	Figure 5-5.	Lake Okeechobee constraint used by the UK-OPS Model.....	72
160	Figure 5-6.	Water budget comparison of WSmax and WSmaxL for Lake Tohopekaliga.	73
161	Figure 5-7.	Lake Tohopekaliga stage percentiles.	74
162	Figure 5-8.	Annual flow at the S-65 structure.	75
163			

164 **ACRONYMS, ABBREVIATIONS, AND UNITS OF MEASUREMENT**

165	2008 LORS	2008 Lake Okeechobee Regulation Schedule
166	AFET-W	Alternative Formulation and Evaluation Tool – Water Reservation
167	Applicant's Handbook	<i>Applicant's Handbook for Water Use Permit Applications in the South Florida</i>
168		<i>Water Management District</i>
169	C&SF Project	Central and Southern Florida Flood Control Project
170	CERP	Comprehensive Everglades Restoration Plan
171	cfs	cubic feet per second
172	cm	centimeter
173	cm/s	centimeters per second
174	District	South Florida Water Management District
175	F.S.	Florida Statutes
176	FAS	Floridan aquifer system
177	ft	foot
178	ft/s	feet per second
179	FWC	Florida Fish and Wildlife Conservation Commission
180	HRS	Headwaters Revitalization Schedule
181	KCOL	Kissimmee Chain of Lakes
182	km	kilometer
183	KRRP	Kissimmee River Restoration Project
184	LKB	Lower Kissimmee Basin
185	LOSA	Lake Okeechobee Service Area
186	m	meter
187	MFL	Minimum Flow and Minimum Water Level
188	NGVD29	National Geodetic Vertical Datum of 1929
189	RAA	Restricted Allocation Area
190	SAS	surficial aquifer system
191	SFWMD	South Florida Water Management District
192	UCOL	Upper Chain of Lakes
193	UK-OPS	Upper Kissimmee – Operations Simulation (Model)
194	UKB	Upper Kissimmee Basin
195	USACE	United States Army Corps of Engineers
196	USFWS	United States Fish and Wildlife Service
197	WRL	water reservation line

CHAPTER 1: INTRODUCTION

1.1 Overview and Purpose of Document

This document summarizes the technical and scientific data, assumptions, models, and methodology used to support rule development to reserve water for the protection of fish and wildlife for specific waterbodies located in the Kissimmee River and Chain of Lakes. The meaning of “water needed to protect fish and wildlife” (i.e., ensuring the health and sustainability of fish and wildlife communities through natural cycles of drought, flood, and population variation) is discussed in more detail in **Chapter 2**. A Water Reservation is a legal mechanism to set aside water from consumptive use for the protection of fish and wildlife or for public health and safety. A Water Reservation may be established in such locations and quantities, and for such seasons of the year, as may be required for the protection of fish and wildlife or for public health and safety.

The waterbodies included in the proposed Kissimmee River and Chain of Lakes Water Reservations (Water Reservations) are components of the Central and Southern Florida Flood Control Project (C&SF Project). The C&SF Project is a multi-objective project, originally authorized by the Flood Control Act of 1948 and modified by subsequent acts, that provides for flood control, drainage, water supply, and other purposes. The South Florida Water Management District (SFWMD or District) is the local sponsor of the C&SF Project [Section 373.1501, Florida Statutes (F.S.)]. In 1992, the United States Congress authorized the C&SF Project to include ecosystem restoration of the Kissimmee River and improvement of habitat in the Kissimmee River Headwaters Lakes. In its capacity as local sponsor, the SFWMD operates and maintains the C&SF Project, including the subject reservation waterbodies. Operation of project components is required to occur in accordance with federally adopted regulation schedules and water management to meet project goals. The regulation schedules define maximum lake stages and water releases from the waterbodies and are specifically related to stage and time of year. Therefore, the proposed Water Reservations must dovetail with the authorized federal regulation schedules for the subject waterbodies.

1.2 Reservation Waterbodies

The reservation waterbodies are listed below and shown in **Figure 1-1**, and include contributing waterbodies or tributaries, as described in other chapters of this document.

1. Upper Chain of Lakes (UCOL) – six lake groups
 - a. Lakes Hart-Mary Jane
 - b. Lakes Myrtle-Preston-Joel
 - c. Alligator Chain of Lakes
 - d. Lake Gentry
 - e. East Lake Tohopekaliga
 - f. Lake Tohopekaliga
2. Headwaters Revitalization Lakes – one lake group
 - a. Lakes Kissimmee-Cypress-Hatchineha-Tiger
3. Kissimmee River and floodplain

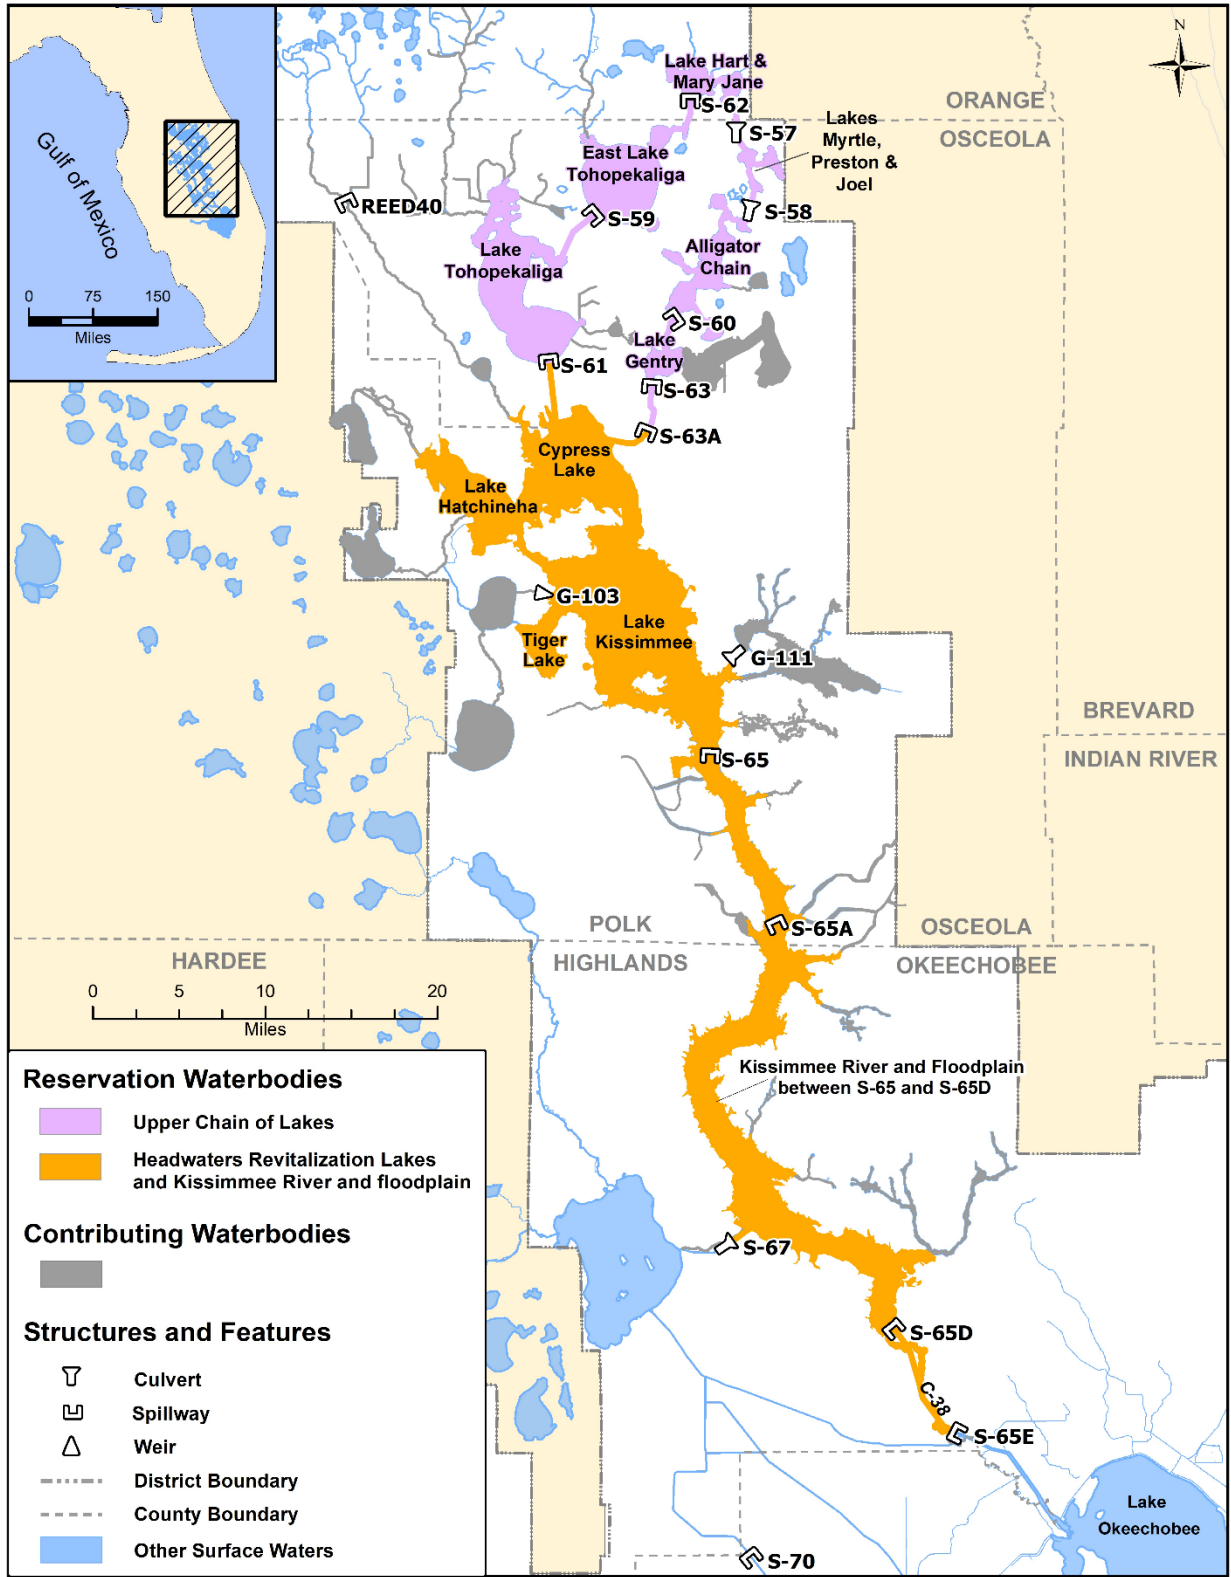


Figure 1-1. Kissimmee River and Chain of Lakes Water Reservation waterbodies.

The Kissimmee River reservation waterbodies include the Kissimmee River and its 100-year floodplain, as delineated by the United States Army Corps of Engineers (USACE), between the S-65 and S-65D structures; the Istokpoga Canal and floodplain east of the S-67 structure; and the C-38 Canal and remnant river channels from the S-65D to S-65E structures (**Figure 1-1**). It also includes restored sections of the Kissimmee River from the S-65 structure to Lake Okeechobee.

The remaining reservation waterbodies consist of one or more lakes and interconnecting canals in the Headwaters Revitalization Lakes and UCOL. These two groups of lakes, which contain several reservation waterbodies, are collectively referred to as the Kissimmee Chain of Lakes (KCOL). All waterbodies in these sections are part of the C&SF Project or are hydrologically connected to the C&SF Project by man-made or natural conveyance features, and they contribute flows to each other as well as to the Kissimmee River. These reservation waterbodies are managed in accordance with water control structure regulations and schedules prescribed by the USACE (1994), which are significant constraints that were considered in the quantification of water needed for protection of fish and wildlife. The reservation waterbodies and contributing waterbodies are described in more detail in **Chapter 3** and **Appendix A**. The water needed for the protection of fish and wildlife and proposed for reservation is described in **Chapter 5** and **Appendix B**.

In addition to their natural values, the reservation waterbodies are significant because, as part of a diverse group of wetland, lake, and river/floodplain ecosystems, they form a substantial portion of the headwaters of the Kissimmee-Okeechobee-Everglades system. SFWMD and other state and federal agencies have invested considerable resources in managing waterbodies in this region of Florida. The most noteworthy investment is the Kissimmee River Restoration Project (KRRP). The meandering Kissimmee River was channelized between 1962 and 1971, resulting in severe damage to the biological communities of the river and floodplain, which prompted immediate calls for restoration. The steps taken toward restoration of the Kissimmee River are summarized in **Section 1.3**.

1.3 Kissimmee River and Chain of Lakes Background

This section provides background information regarding events that helped form the need and basis for the Kissimmee River and Chain of Lakes Water Reservations. The long-term commitment of the federal government, State of Florida, and SFWMD to restore the Kissimmee River and floodplain under the KRRP is the genesis of many supporting activities. **Table 1-1** provides a brief chronology of major actions and events associated with the KRRP.

Table 1-1. Major actions and events in the planning, development, and implementation of the Kissimmee River Restoration Project.

Time Period	Major Action or Event
1920s-1940s	Hurricanes and flooding in the Upper Kissimmee Basin
1954	United States Congress authorizes the Kissimmee portion of the C&SF Project
1962-1971	C&SF Project channelizes the Kissimmee River
1971	Governor's Conference on Water Management recommends restoration of the Kissimmee River
1976	Kissimmee River Restoration Act [Chapter 76-113, F.S.] creates the Kissimmee River Coordinating Council
1978-1985	First federal feasibility study notes potential for restoration, but federal funding not feasible (USACE 1985)
1983	Kissimmee River Coordinating Council recommends the backfilling plan
1984-1990	Kissimmee River Demonstration Project shows restoration is possible

Time Period	Major Action or Event
1986	The Water Resources Act mandates that enhancements to environmental quality in the public interest should be calculated as equal to other costs
1988	Kissimmee River Restoration Symposium adopts the ecological integrity goal
1991	Second federal feasibility study recommends the Level II backfilling plan (USACE 1991)
1992	The Water Resources Development Act authorizes the Kissimmee River Restoration Project
1994	The Department of the Army and SFWMD (1994) sign a project cooperative agreement
1994	Construct test backfill and conduct high-flow tests on backfill stability
1996	Headwaters Revitalization Feasibility Study completed (USACE 1996)
1995-1999	SFWMD conducts baseline sampling for Phase I construction (Bousquin et al. 2005a)
1999-2001	Phase I backfilling completed, and monitoring continues (Bousquin et al. 2005a)
2006-2009	Phases IVA and IVB backfilling completed and monitoring continues
2014	Publication of nine manuscripts in <i>Restoration Ecology</i> on interim ecosystem response to restoration in the Phase I area (Anderson 2014a,b, Bousquin and Colee 2014, Cheek et al. 2014, Colangelo 2014, Jordon and Arrington 2014, Koebel and Bousquin 2014, Koebel et al. 2014, Spencer and Bousquin 2014)
2015-2020	Phase II/III backfilling and S-69 weir to be completed
2020	Expected implementation of Final Headwaters Revitalization Schedule following completion of all project construction and land acquisition
2020-2025	SFWMD to conduct post-construction monitoring and evaluation for Phases I and II/III construction areas

C&SF Project = Central and Southern Florida Flood Control Project; F.S. = Florida Statutes; SFWMD = South Florida Water Management District; USACE = United States Army Corps of Engineers.

1.3.1 Kissimmee River Restoration

Before the Kissimmee River was channelized, it meandered for 103 miles between Lakes Kissimmee and Okeechobee (Koebel 1995). The river channel provided diverse habitats associated with sand bars and narrow vegetation beds as well as variable flow conditions depending on inflow and channel morphology (Toth et al. 1995). The river frequently overflowed its banks and inundated the 1- to 2-mile wide floodplain for extended periods of time, maintaining a mosaic of wetland plant communities. After the river was channelized by the construction of the C-38 flood control canal, most of the floodplain was drained and the remaining portions of the historical river channel no longer received flow. Because the canal conveyed all flow from the lakes to the north as well as local runoff, overbank flooding was virtually eliminated, ending significant inundation of the river's floodplain. As a result of these changes, habitat in the river channel and floodplain declined dramatically, with concomitant effects on native fish and wildlife.

Reconstruction of the Kissimmee River has been occurring in phases since 1999. Three of five construction phases are complete. Since completion of the first phase of construction, pre-channelization hydrologic conditions have been partially re-established (Bousquin et al. 2007, 2009), and partial recoveries have been documented in fish, wildlife, and plant communities. **Figure 1-2** shows the portion of the Kissimmee River that is being restored. Further improvement is expected after the new USACE Headwaters Revitalization Schedule (HRS), described in **Chapter 4**, is implemented at the S-65 water control structure, which controls discharge to the Kissimmee River. Until all phases of construction are complete, an interim regulation schedule is in place that does not provide the full benefits of the HRS. However, fish, wildlife, and habitat responses within project areas are being monitored using river/floodplain restoration performance measures under the SFWMD's Kissimmee River Restoration Evaluation Program. An integral component of the restoration is the reservation from allocation of water needed for protection of fish and wildlife. The water identified for the natural system will be protected through a Water Reservation, as authorized by Florida law.

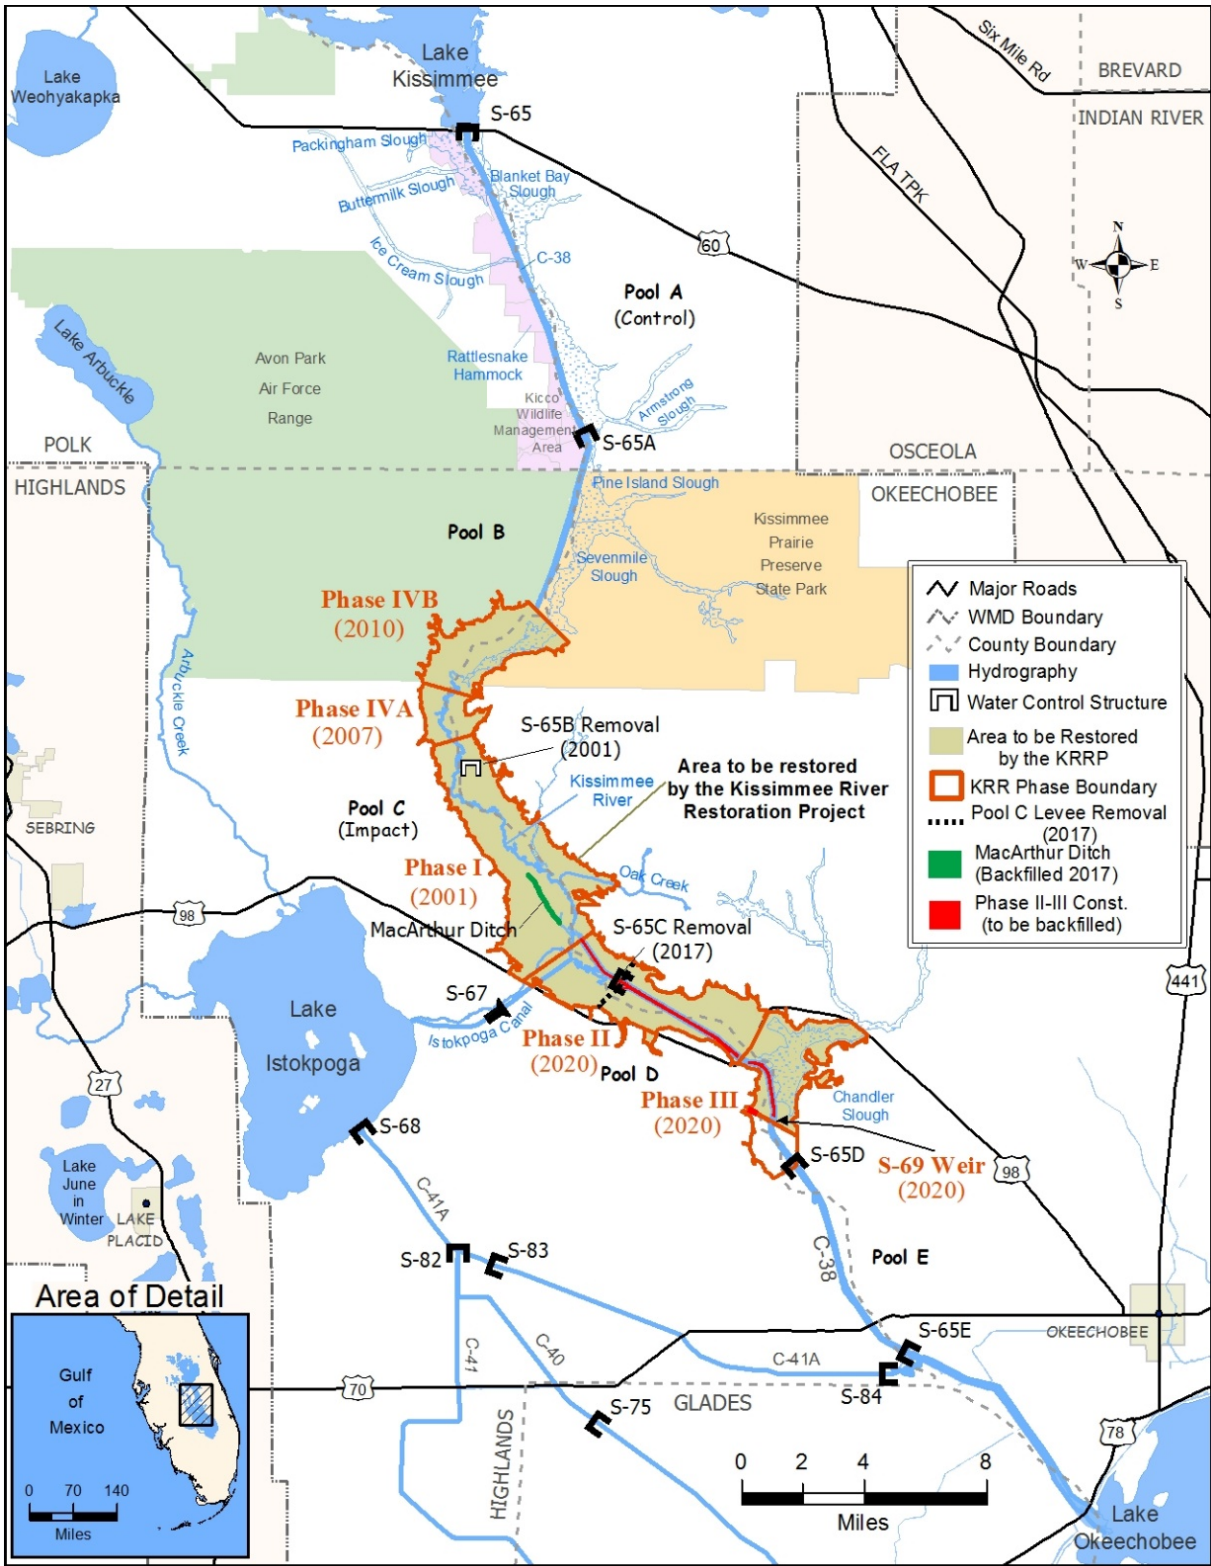


Figure 1-2. Map of the area being restored by the Kissimmee River Restoration Project.

1.3.2 Headwaters Revitalization Project

A key element of planning for the KRRP was development of a new regulation schedule for the S-65 structure (i.e., the HRS). The HRS was developed to provide the water storage and hydrology necessary to meet the ecological integrity goal of the KRRP (Koebel and Bousquin 2014). The HRS was authorized by Congress in 1992. In November 1996, the USACE issued its record of decision approving the recommended plan described in USACE (1996), including the construction plan and the new regulation schedule, finding it “to be economically justified, in accordance with environmental statutes, and in the public interest.”

1.3.3 Central Florida Water Initiative

In 2006, the Central Florida Coordination Area “Action Plan” was initiated among three water management districts—St. Johns River Water Management District, Southwest Florida Water Management District, and SFWMD—to address short- and long-term development of water supplies in the Central Florida area, specifically Orange, Osceola, Seminole, Polk, and southern Lake counties. This effort evolved into the ongoing Central Florida Water Initiative, a collaborative effort among the aforementioned water management districts, other government agencies, and various stakeholders to address current and long-term water supply needs in a five-county area in the Central Florida region. In November 2015, the Governing Boards of the three water management districts approved the 2015 Central Florida Water Initiative Regional Water Supply Plan (Central Florida Water Initiative 2015), including the 2035 Water Resources Protection and Water Supply Strategies Plan.

At the time of this writing, the draft 2020 Central Florida Water Initiative Regional Water Supply Plan is undergoing public review and comment. Governing boards of the three water management districts are anticipated to approve the plan in November 2020. The draft plan recognizes the SFWMD is developing the Kissimmee River and Chain of Lakes Water Reservations to protect the volume of water needed for fish and wildlife in the Kissimmee River restored conditions. The increased demands projected through 2040 in the draft plan can be met through development of alternative water supplies and other management strategies. Potential project options do not include surface water from the Kissimmee River and Chain of Lakes.

1.4 Prior Work on the Kissimmee River and Chain of Lakes Water Reservations

In June 2008, SFWMD’s Governing Board initiated rule development for the Kissimmee River and Chain of Lakes’s Water Reservation. The technical information presented here identifies the hydrologic requirements to ensure protection of fish and wildlife and forms the basis for the current rule development process.

In March 2009, SFWMD (2009) developed a draft technical document to support Water Reservation rule development efforts. The document was evaluated by an independent, scientific peer-review panel in April 2009, in accordance with Florida Department of Environmental Protection guidance in Rule 62-40.474(4), Florida Administrative Code. The 2009 peer-review panel was asked to assess the scientific and technical data, methodologies, models, and assumptions employed in each model, as summarized in the 2009 draft technical document, and evaluate their validity and soundness. The peer-review panel found the supporting data and information used were technically sound, including the inferences and assumptions made regarding the linkages between hydrology and the protection of fish and wildlife (Aday et al. 2009).

The initial Water Reservation development effort was suspended due to ongoing work that, at the time, had the potential to change the regulation schedules within the UCOL. In June 2014, SFWMD's Governing Board reinitiated the Water Reservation rule development effort. A public rule development workshop was held on July 30, 2014. On December 12, 2014, draft Water Reservation rules were presented during a rule development workshop. In March 2015, a draft technical document was developed (SFWMD 2015a), and public comments on the draft were solicited. Rule development efforts were suspended again in 2016 to address concerns related to threatened and endangered species. Work on the Water Reservations began again in 2018, and the technical document was updated to its present form. Once adopted, the Water Reservation rule criteria will be implemented in the SFWMD's water use permitting program and will require applicants to provide reasonable assurance that their proposed use of water will not withdraw water reserved for the protection of fish and wildlife in the Kissimmee River and Chain of Lakes.

SFWMD's technical approach to quantify water needed for the protection of fish and wildlife in the Kissimmee River and Chain of Lakes is outlined in **Chapters 3** through **5** and involves several steps, including identification of the following:

1. Water reservation waterbodies;
2. Habitat and fish and wildlife species to be protected;
3. Hydrologic links to habitat, fish, and wildlife; and
4. Water volumes to be reserved.

CHAPTER 2: BASIS FOR WATER RESERVATIONS

2.1 Definition and Statutory Authority

A Water Reservation is a legal mechanism to reserve a quantity of water from consumptive use for the protection of fish and wildlife or for public health and safety.

Section 373.223(4), F.S., states the following:

The governing board or the department, by regulation, may reserve from use by permit applicants, water in such locations and quantities, and for such seasons of the year, as in its judgment may be required for the protection of fish and wildlife or the public health and safety. Such reservations shall be subject to periodic review and revision in the light of changed conditions. However, all presently existing legal uses of water shall be protected so long as such use is not contrary to the public interest.

It is reasonable to interpret “protection” to mean ensuring the health and sustainability of fish and wildlife communities through natural cycles of drought, flood, and population variation. *See* Fla. Div. of Admin. Hr’gs (2006) Case 04-000880RP. When water is reserved pursuant to Section 373.223(4), F.S., it is unavailable for allocation to new or increased consumptive uses. However, existing legal uses of water are protected so long as such uses are not contrary to the public interest. An existing legal use is a water use that is authorized in a water use permit pursuant to Part II of Chapter 373, F.S., or is exempt from water use permit requirements.

It is equally important to understand the limitations of water reservations. Water reservations do not drought-proof a natural system, ensure wildlife proliferation, or establish an operating regime. While Part II, Chapter 373, F.S., authorizes SFWMD to permit consumptive uses and establish water reservations, it does not authorize SFWMD to establish operating criteria for the C&SF Project system or for Comprehensive Everglades Restoration Plan (CERP) projects. C&SF Project system and CERP project operating criteria are established by USACE and implemented by SFWMD through federal and state authorities. However, the project operating criteria affect the timing and availability of water in the District; therefore, the operating plans must be consistent with established Water Reservation and permitted water allocations.

The Florida Legislature gave broad discretion to the Governing Boards of Florida’s five water management districts to exercise judgment in establishing water reservation, taking into consideration the water needs of fish and wildlife as well as public health and safety while also balancing the overall district missions. Districts are directed to periodically review and revise adopted water reservations, as needed, to achieve this balance.

The SFWMD elected to use its Water Reservation authority conferred by Section 373.223(4), F.S., to reserve quantities of water in the Kissimmee River and Chain of Lakes for the protection of fish and wildlife. The draft Water Reservation rules also support the restoration goals and objectives of the KRRP. The rulemaking is based on the technical information and recommendations in this document.

2.2 Water Reservation Rulemaking Process

The general process of Water Reservation rulemaking includes several steps (**Figure 2-1**). The Kissimmee River and Chain of Lakes Water Reservations rule development originally was authorized by the SFWMD Governing Board in June 2008. Analyses and a supporting technical document were completed and peer reviewed in 2009. The project was subsequently postponed in 2009, but SFWMD's Governing Board authorized re-initiation of the project on June 12, 2014. A new Notice of Rule Development was published in the Florida Administrative Register on July 16, 2014. Building on the initial technical analysis conducted in 2008-2009, new and updated analyses and modeling were completed, and an updated technical document and Water Reservation rules were drafted between 2014 and 2016. Public workshops and key stakeholder meetings were held on July 30, 2014, December 12, 2014, January 08, 2015 (Water Resource Advisory Commission meeting), January 06, 2016, March 15, 2016, March 30, 2016, and April 08, 2016, to gain public input on the rulemaking process.

Since 2016, the Upper Kissimmee – Operations Simulation (UK-OPS) Model was completed for application to the rulemaking process, and revision of the draft Water Reservation rules, applicable sections of the *Applicant's Handbook for Water Use Permit Applications in the South Florida Water Management District* (Applicant's Handbook; SFWMD 2015b), and the revised technical document were completed. The detailed model documentation report for the UK-OPS Model is included as **Appendix C**. An independent, scientific peer review of the UK-OPS Model (**Appendix D**) was completed in November 2019. For more information regarding the 2009 peer review please see **Appendix E**.

Once consensus is reached and the draft Water Reservation rules are finalized, they will be presented to the SFWMD Governing Board for adoption. The SFWMD encourages stakeholder review and comment on the draft Water Reservation rules. There will be opportunities in future rule development workshops for stakeholders to give feedback prior to final rule adoption.

Key Steps in Water Reservation Rule Development Process

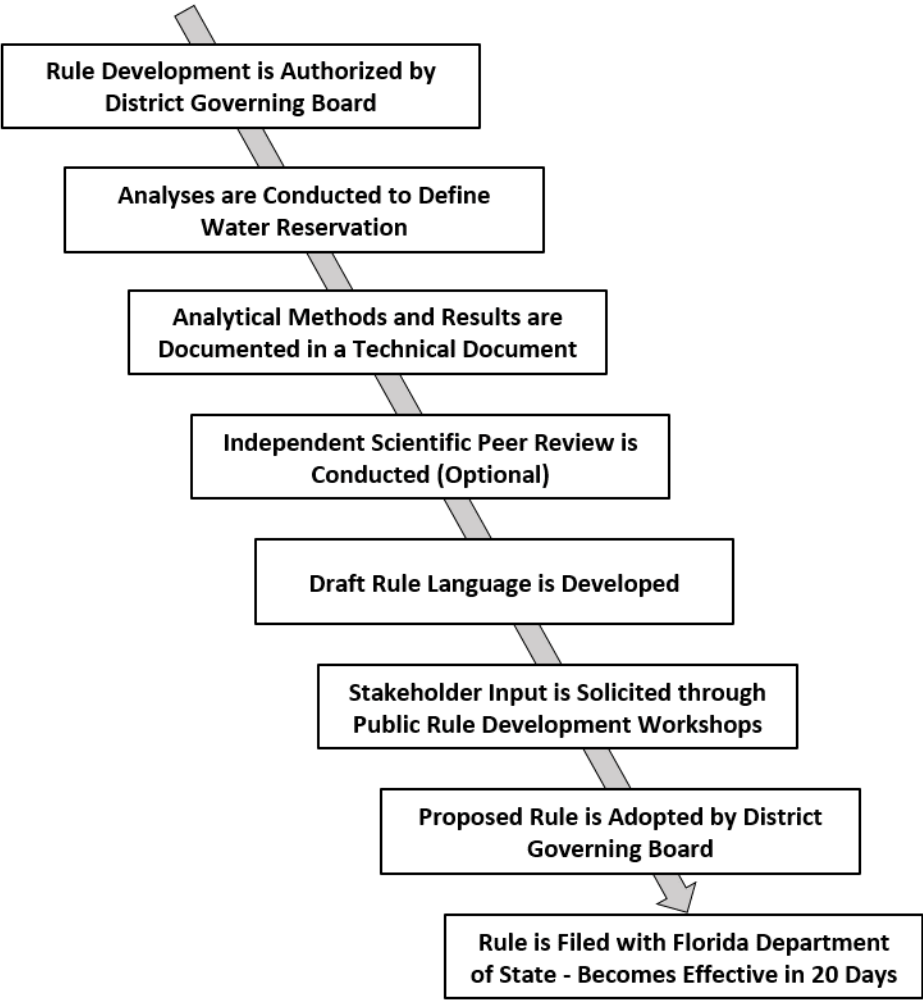


Figure 2-1. Water Reservation rule development process.

CHAPTER 3: DESCRIPTION OF RESERVATION WATERBODIES

3.1 Kissimmee Basin Overview

Located in Central Florida, the Kissimmee Basin encompasses the SFWMD's Upper Kissimmee Basin (UKB) and Lower Kissimmee Basin (LKB) water supply planning areas (**Figure 3-1**). The Kissimmee Basin is bounded to the north and east by the St. Johns River Water Management District, to the west by the Southwest Florida Water Management District, and to the south by Lake Okeechobee. Within its boundary are all or portions of six counties—Orange, Osceola, Polk, Highlands, Okeechobee, and Glades.

The Kissimmee Basin experiences a humid, subtropical climate with wet and dry seasons of nearly equal length. Average yearly rainfall is 48 inches (121 centimeters [cm]) in the UKB and 45 to 50 inches (114 to 127 cm) in the LKB. Most precipitation falls during a distinct wet season (June to October). Air temperature ranges from 41 to 86 degrees Fahrenheit (5 to 30 degrees Celsius).

The major physiographic features of the Kissimmee Basin were formed when much of Florida was submerged (White 1970). The Kissimmee Basin has a roughly north-northwest to south-southeast alignment that parallels relict sandy beach ridges created by longshore currents (Warne et al. 2000). Most of the basin lies within the Osceola Plain, which is 40 miles wide and 100 miles long. The Osceola Plain is bounded to the west by the Lake Wales Ridge and to the northwest by the Mount Dora and Orlando ridges (White 1970). A scarp separates the Osceola Plain from the Eastern Valley on the northeastern and eastern borders and from the Okeechobee Plain to the south. The highest elevation of the Osceola Plain occurs in the northwest corner, where it rises to 90 to 95 feet (ft) National Geodetic Vertical Datum of 1929 (NGVD29). However, most of the plain occurs between 60 and 70 ft NGVD29.

The remainder of the Kissimmee Basin lies on the Okeechobee Plain, which is 30 miles wide and 30 miles long. From the toe of the scarp separating it from the Osceola Plain, the elevation of the Okeechobee Plain decreases from 40 to 20 ft NGVD29 at the northern shore of Lake Okeechobee.

The sandy soils found throughout the Kissimmee Basin are derived primarily from marine-deposited silica sands. Most soil types in the UKB and LKB are classified under the Smyrna-Myakka-Basinger Soil Association. Additional information may be found in the Geotechnical Investigations Appendix of the *Central and Southern Florida Final Integrated Feasibility Report and Environmental Impact Statement Environmental Restoration Kissimmee River, Florida* (USACE 1991).

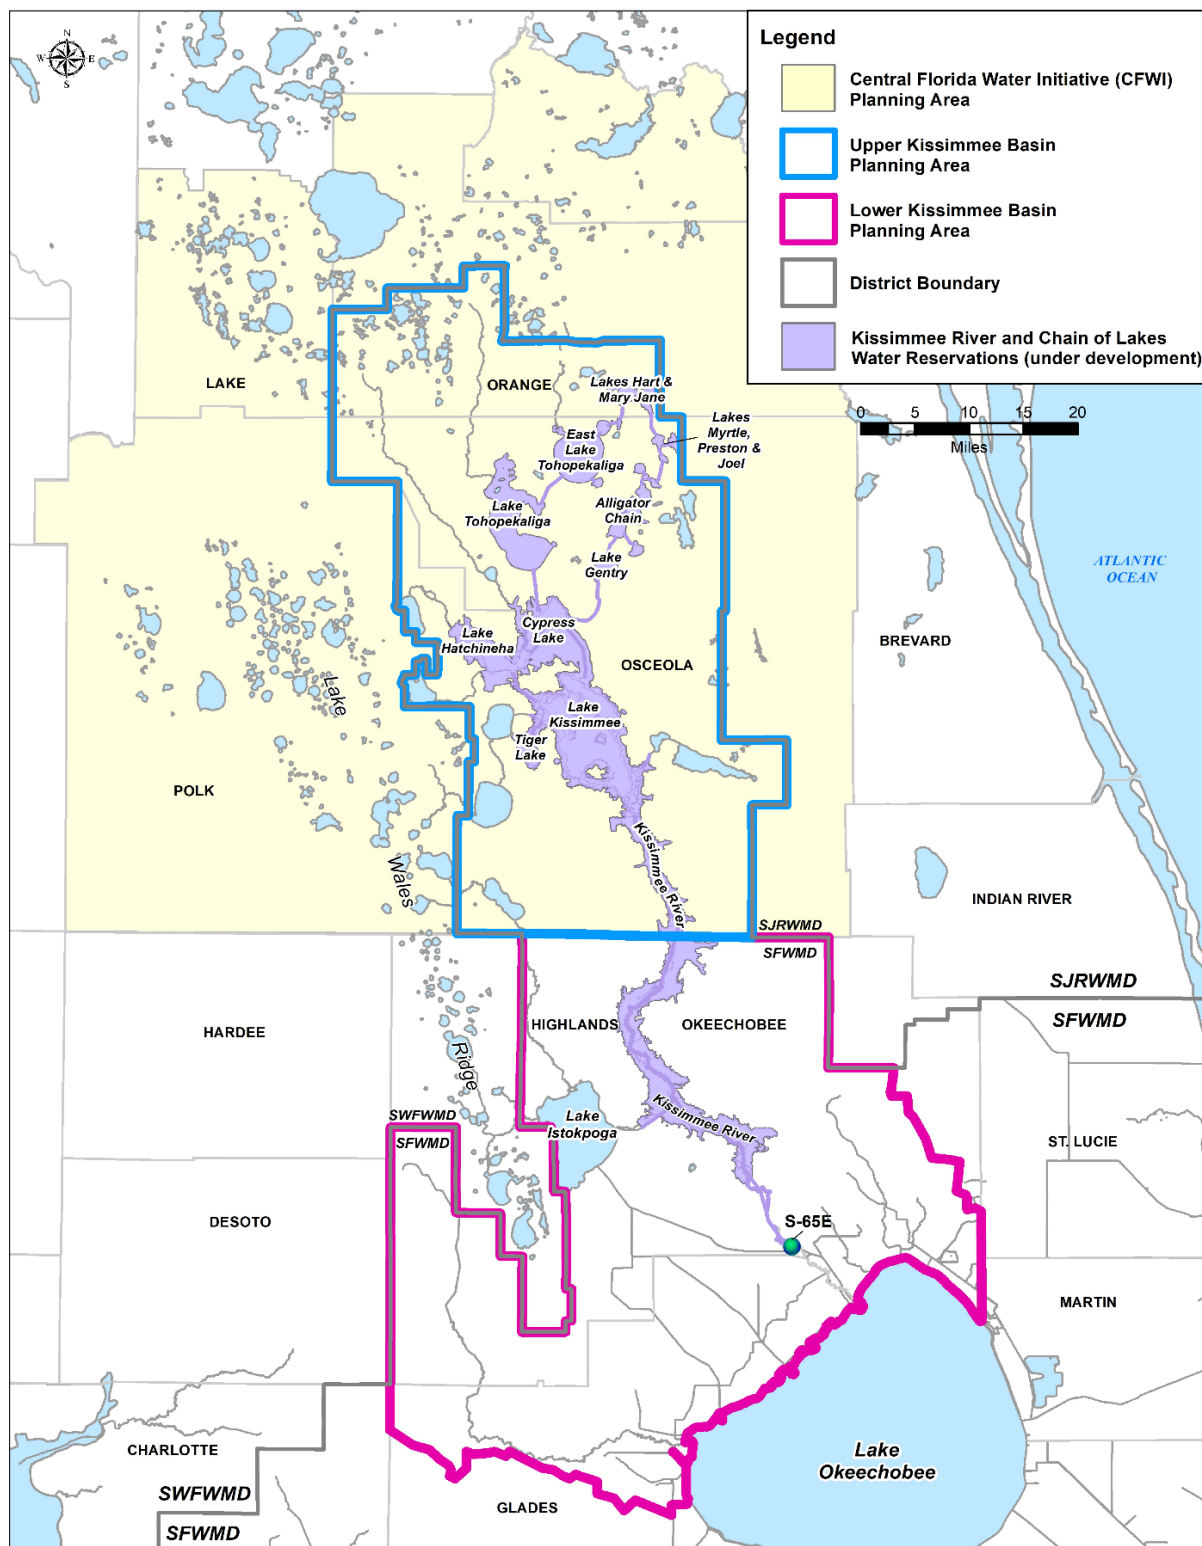


Figure 3-1. Map of the Upper and Lower Kissimmee Basins.

3.2 Surface Water Resources

The UKB has been incorporated into the Central Florida Water Initiative planning area (**Section 1.3.3**) and extends south to the Polk and Osceola county line (**Figure 3-1**). The UKB is 1,607 square miles (4,162 square kilometers [km^2]), more than twice the area of the LKB. The UKB contains hundreds of lakes and wetlands, with the largest lakes occurring along the eastern and southern boundaries (**Figure 3-1**). Lake Kissimmee, the third largest lake in Florida (Brenner et al. 1990), is the outlet of the UKB to the Kissimmee River. Water throughout the UKB is conveyed to the Kissimmee Chain of Lakes (KCOL)—which includes the Headwaters Revitalization Lakes (Lakes Kissimmee, Hatchineha, Cypress, and Tiger) and the Upper Chain of Lakes (UCOL)—through wetlands, sloughs, and tributary streams. The largest tributaries are Boggy, Shingle, and Reedy creeks as well as Big Bend Swamp. Boggy Creek begins at the northern boundary of the basin in the City of Orlando and flows southward into the north end of East Lake Tohopekaliga. Shingle Creek also originates in the City of Orlando and conveys surface water to Lake Tohopekaliga. Reedy Creek originates in the northwest corner of the basin. Near the mouth, Reedy Creek branches, with most of the flow going to the southern branch (Dead River) into Lake Hatchineha and the remaining flow goes through the northern branch into Lake Cypress. Big Bend Swamp is located southeast of the Alligator Chain of Lakes, is connected by extensive shoreline to Brick Lake, and flows into Lake Gentry. The KCOL are interconnected by a series of canals. Essentially all surface water draining the UKB is funneled to the KCOL, which discharge into the Kissimmee River (Warne et al. 2000).

The LKB encompasses 669 square miles (1,733 km^2) directly north and west of Lake Okeechobee (**Figure 3-1**). The dominant hydrologic feature is the Kissimmee River, which receives flows from the KCOL via the C-38 Canal and discharges south to Lake Okeechobee. The Kissimmee River is the largest tributary to Lake Okeechobee, accounting for approximately 50% of the lake's inflows (SFWMD 2019). The drainage network in the LKB is not well developed and is composed mostly of tributary sloughs. Consequently, the larger UKB is a more important source of water for the Kissimmee River than its tributary watershed.

3.3 Connectivity of the Waterbodies

Connectivity of the surface waterbodies of the Kissimmee Basin has changed over time. Before human modifications, there was a direct connection between the Kissimmee River and several lakes. In 1842, it was possible to travel by boat up the Kissimmee River and across Lakes Kissimmee, Hatchineha, and Cypress to Lake Tohopekaliga (Preble 1945). While well-defined channels did not connect all the lakes, water likely moved between lakes by overland flow during wetter years and by groundwater movement during drier conditions (Warne et al. 2000).

During the 1880s, canals were dredged between lakes in the KCOL as part of a drainage project to reclaim land. Another part of the project dredged a connection between Lake Okeechobee and the Caloosahatchee River. By 1882, it was possible to travel by steamboat from the Town of Kissimmee on Lake Tohopekaliga through Lake Kissimmee then down the Kissimmee River, across Lake Okeechobee, down the Caloosahatchee River to Fort Myers, and ultimately to the Gulf of Mexico.

In the Rivers and Harbors Act of 1902, the United States Congress authorized a federal navigation project with “a channel width of 30 feet and depth of 3 feet at the ordinary stage of the river” from the town of Kissimmee at the northern end of Lake Tohopekaliga through Lakes Cypress, Hatchineha, and Kissimmee and down the Kissimmee River to Fort Basinger. The navigation project involved removal of large woody snags and dredging of channels, as necessary. It was completed by the USACE between 1902 and 1909. In 1927, the USACE conducted the last federal maintenance dredging for the project.

In addition to these large projects, several small projects were conducted by private landowners and local companies. Such projects included small structures on the Zipprrer Canal between Lakes Rosalie and Kissimmee and a structure on the Istokpoga Canal between Lake Istokpoga and the Kissimmee River. Other small drainage ditches and levees were constructed by private landowners.

In 1947, hurricanes caused severe flooding in much of South Florida, including the Kissimmee Basin. In response to a request for help from the State of Florida, the United States Congress authorized the C&SF Project in 1949. Features affecting the Kissimmee Basin were authorized in 1954 and constructed between 1962 and 1972. These projects included enlarging existing canals, dredging a new canal to connect Lake Gentry to Lake Cypress, and installing nine water control structures to regulate water levels and flows between the lakes. The structures are responsible for the current path of water movement through the KCOL (Figure 3-2). Operation of the structures narrowed the range of water level fluctuation in the lakes, reducing the amount and quality of habitat for fish and wildlife.

Part of the C&SF Project included constructing the C-38 Canal, which channelized the entire length of the Kissimmee River between Lakes Kissimmee and Okeechobee. In addition to the S-65 structure, located at the outlet from Lake Kissimmee, five water control structures (S-65A to S-65E) were installed along the C-38 Canal to step-down water levels and control flow within the river. Channelization and flow regulation greatly altered flow conditions in the river and water levels on the floodplain, which had immediate effects on fish and wildlife. These changes were so dramatic in the LKB that they sparked a grassroots movement ultimately leading to a partnership between SFWMD and USACE to restore the Kissimmee River.

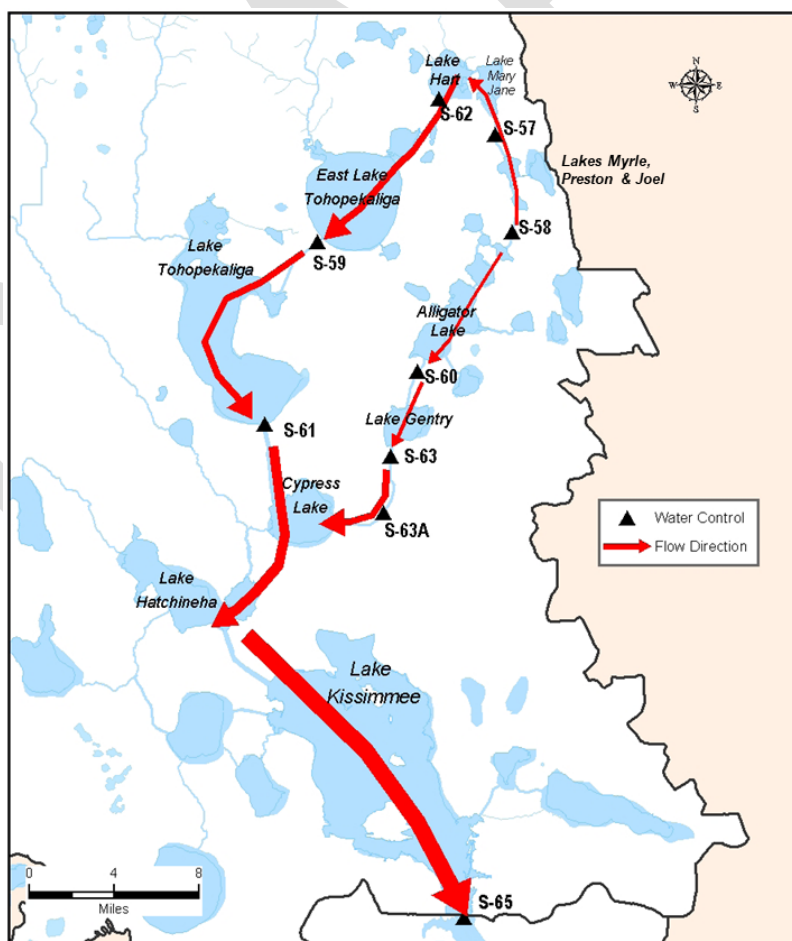


Figure 3-2. Flow of water through the Kissimmee Chain of Lakes.

3.4 Groundwater

The Kissimmee Basin has a complex groundwater system that includes three major hydrogeologic units: the surficial aquifer system (SAS), the intermediate confining unit, and the Floridan aquifer system (FAS). On a broad scale, the FAS is further subdivided into the Upper Floridan aquifer and the Lower Floridan aquifer, which are separated by a semi-confining unit (Miller 1990). These hydrogeologic units have different characteristics that influence the volume of water they contain (**Table 3-1**). Reese and Richardson (2008) redefined these units and provided a hydrogeologic framework for modeling the groundwater system that uses multiple methods for identifying hydrostratigraphic units, including lithologic and geophysical methods. This was used in the modeling done for the Kissimmee River and Chain of Lakes Water Reservations. The thicknesses of the layers vary across the Kissimmee Basin. The magnitude and direction of water interchange between the different aquifers depend on the relative elevation of the potentiometric surfaces of the aquifers and the thickness and vertical permeability of the intervening confining units.

The SAS is primarily recharged by rainfall. Aucott (1988) mapped regional variations in water exchange between the SAS and Upper Floridan aquifer in Florida. The Upper Floridan aquifer in the northern portion of the Kissimmee Basin is recharged by direct downward leakage (e.g., through sinkholes) from the SAS, and where present, through the intermediate confining unit (Aucott 1988, Shaw and Trost 1984, Adamski and German 2004). Recharge to the FAS is high along the Lake Wales, Mount Dora, and Bombing Range ridges where the confining layer is either thin or breached and where elevation differences between the SAS and FAS are greatest (SFWMD 2007). In this area of connection, the SAS consists of fine- to medium-grained quartz sand with varying amounts of silt, clay, and shell deposits.

Table 3-1. Characteristics and potential for water yield from the hydrogeologic layers of the groundwater system in the Kissimmee Basin (Based on: SFWMD 2007).

Hydrogeologic Unit	Characteristics	Potential for Water Yield
Surficial aquifer system	Unconfined aquifer with fine- to medium-grained quartz sand with varying amounts of silt, clay, and crushed shell. Represents the water table.	Yields low quantities of water to wells. Good to fair quality water. Limited to residential supply, lawn irrigation, and small-scale agricultural irrigation.
Intermediate confining unit	Low-permeability sediments and rocks that retard the exchange of water between the surficial and Floridan aquifer systems. Contains interbedded sands, calcareous silts and clays, shell, phosphoric limestone, and dolomite of the Hawthorn group (Miocene).	Not an important source of water, except for a few isolated areas within the Kissimmee Basin.
Floridan Aquifer System		
Upper Floridan aquifer	High permeability with carbonate rock (limestone and dolomite).	Source of virtually all the water used to meet municipal, industrial, and agricultural needs in the Kissimmee Basin.
Semi-confining unit	Less permeable.	Unknown.
Lower Floridan aquifer	High permeability with alternating beds of limestone and dolomite characterized by abundant fractures and solution cavities.	Increasingly used for water supply.

3.5 Reservation and Contributing Waterbodies

Chapter 1 identified the proposed reservation waterbodies. This section provides additional information about the reservation waterbodies and the waterbodies that contribute to them. This section should be reviewed in conjunction with the information, tables, and figures in **Appendix A**. The reservation waterbodies were selected for consideration because they are closely linked and represent substantial water resources important for fish and wildlife. The reservation waterbodies support a world-class sport fisheries population and provide important habitat for several threatened and endangered species. The fish and wildlife resources associated with the reservation waterbodies are described in more detail in **Chapter 4** and **Appendix F**.

Many of the reservation waterbodies are connected; continuously or intermittently receiving substantial inflows (in terms of timing and volume) from other water sources such as wetlands, sloughs, lakes, streams, creeks, canals, and ditches, which are considered contributing waterbodies (**Figure 3-3**). The surface water inflows from these contributing waterbodies are integral to maintaining the hydrologic regime of the reservation waterbodies to ensure protection of fish and wildlife. Under the draft Water Reservation rules, withdrawals from reservation and contributing waterbodies will be regulated, as outlined in Subsection 3.11.5 of the Applicant's Handbook (SFWMD 2015b). Contributing waterbodies are currently regulated under Subsection 3.3 of the Applicant's Handbook (SFWMD 2015b); however, additional permitting criteria have been added to ensure protection of water needed for fish and wildlife. In summary, the reservation and contributing waterbodies will be regulated to ensure protection of water needed for fish and wildlife. A more detailed description of the regulatory constraints is provided in **Chapter 5**.

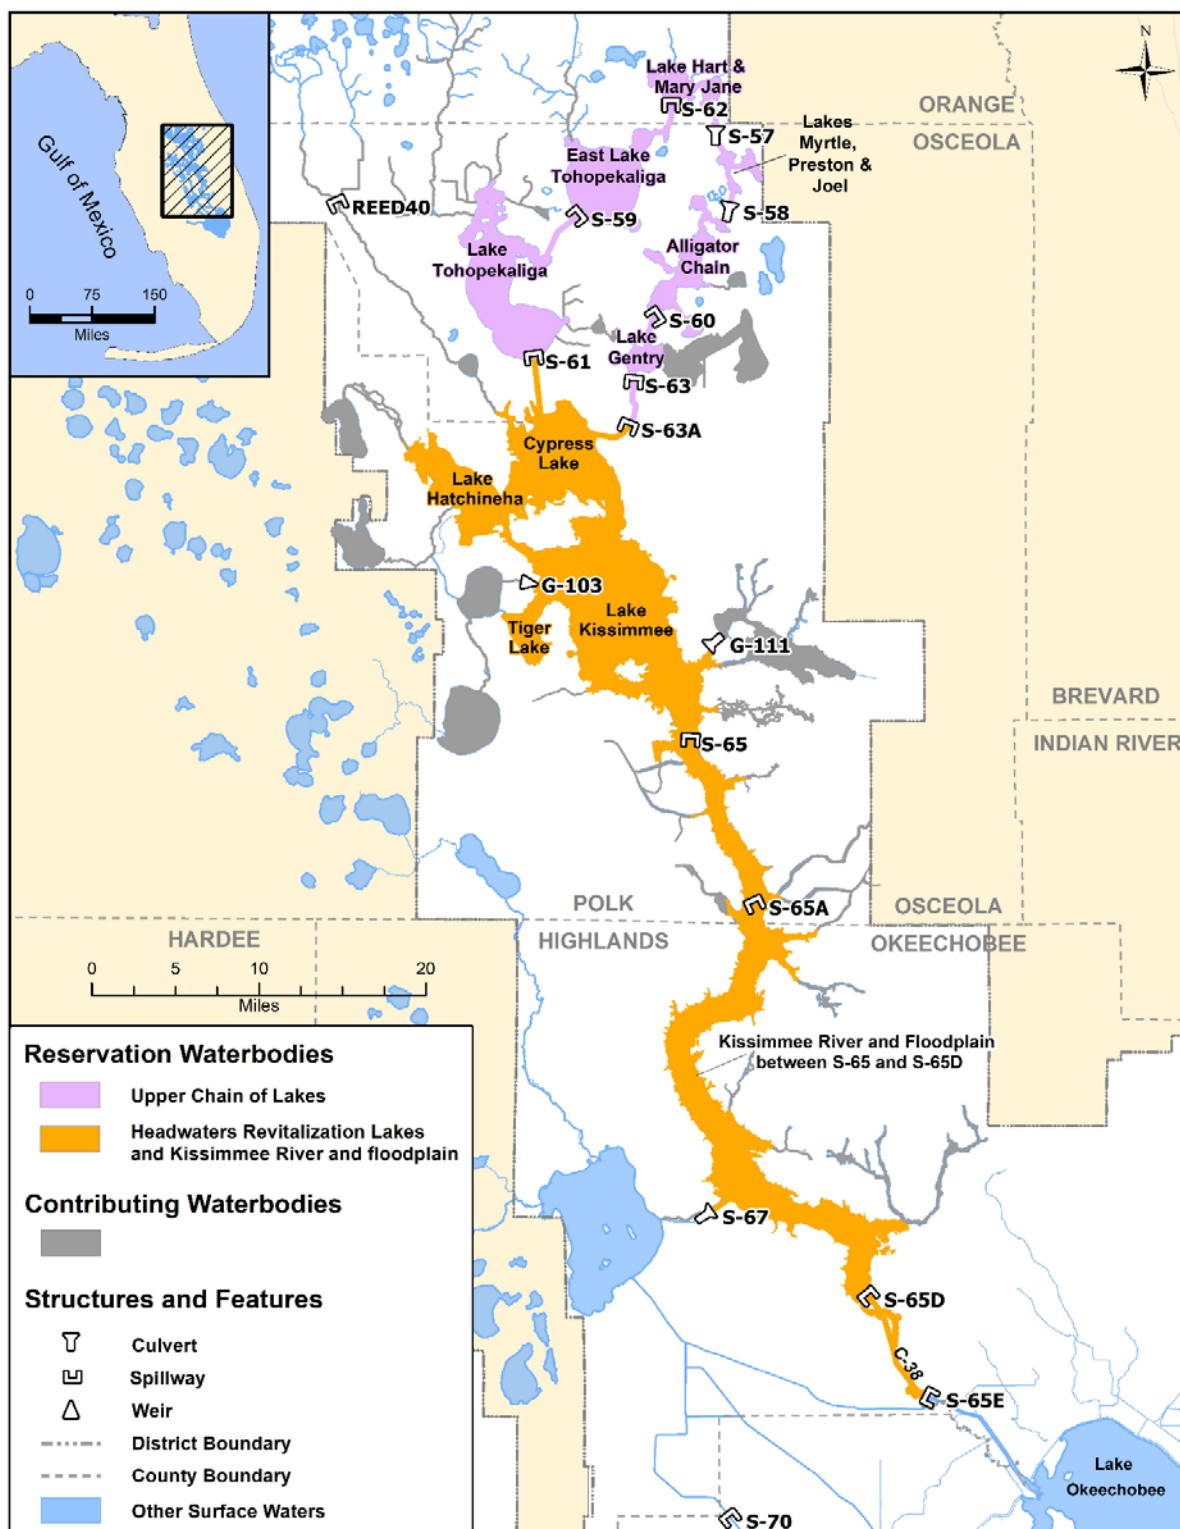


Figure 3-3. Reservation and contributing waterbodies associated with the Kissimmee River and Chain of Lakes Water Reservations.

3.5.1 Kissimmee River

The approximate extent of the Kissimmee River reservation waterbody is shown in **Figure 3-4**. It is bounded by the 100-year flood elevation as delineated by the USACE (1991) between structures S-65 and S-65D and the portion of the Istokpoga Canal and floodplain east of the S-67 structure. It also includes the C-38 Canal and remnant (non-flowing) river channels between the S-65D and S-65E structures.

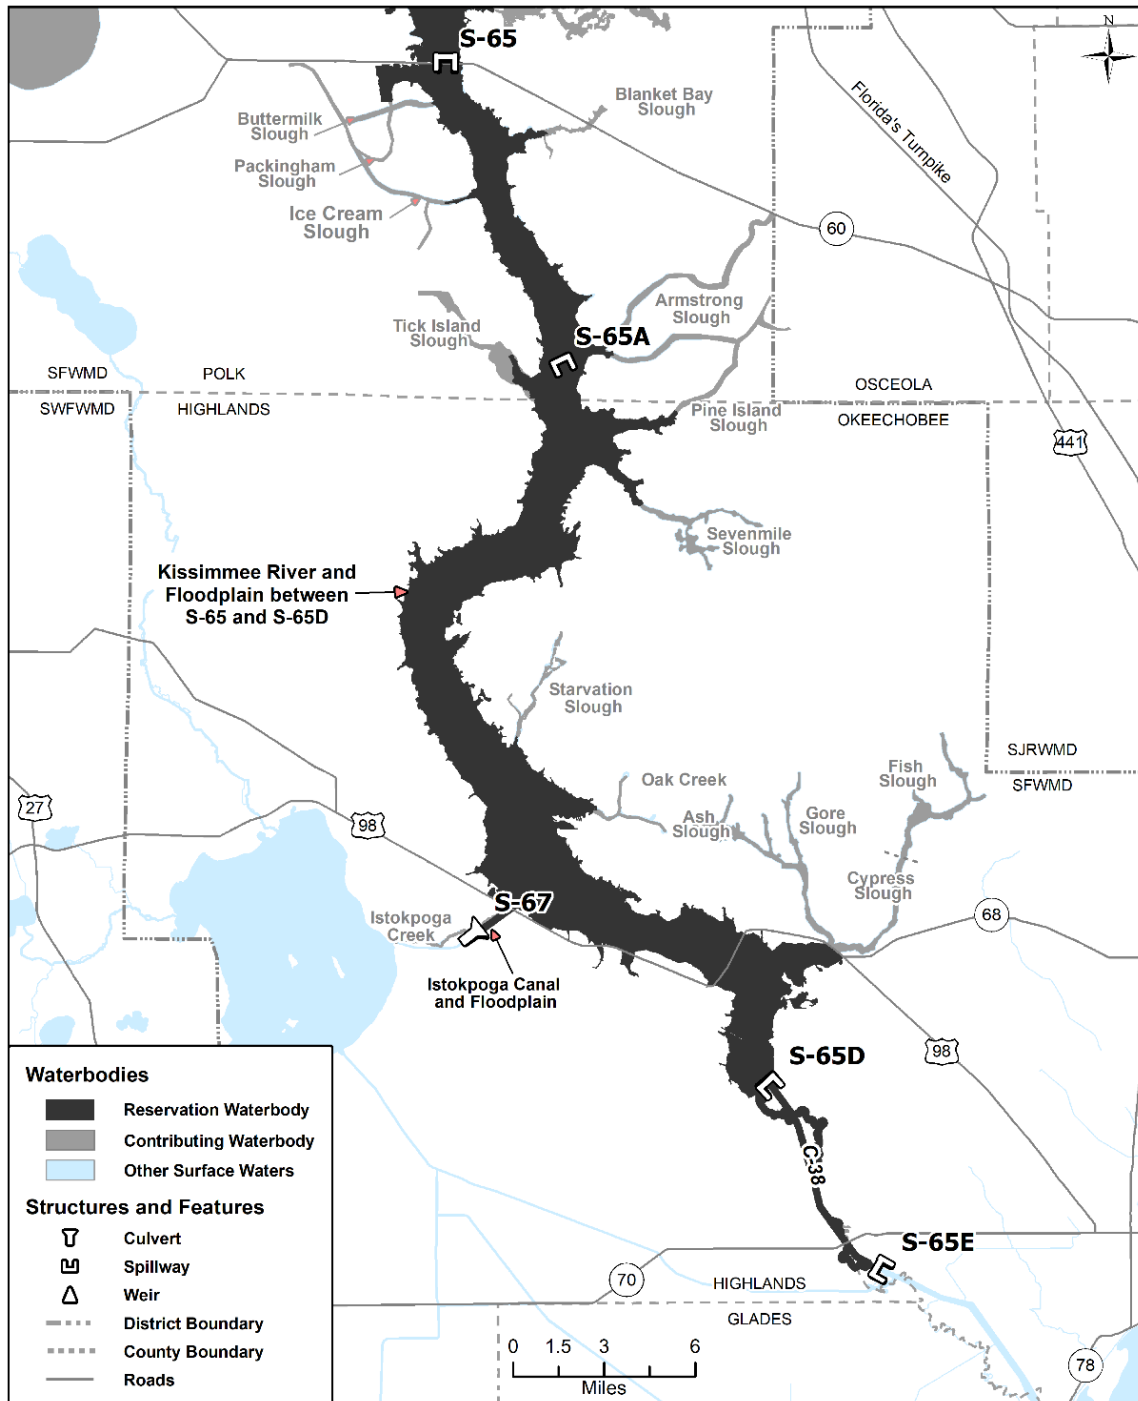


Figure 3-4. Kissimmee River reservation and contributing waterbodies.

As depicted in **Figure 3-4**, numerous contributing waterbodies (tributary systems) discharge surface water to the Kissimmee River and C-38 Canal. On the eastern side of the Kissimmee River/C-38 Canal, contributing waterbodies include Blanket Bay, Armstrong, Pine Island, Sevenmile, Starvation, Ash, Gore, Fish, and Cypress sloughs as well as Oak Creek. On the western side of the Kissimmee River, contributing waterbodies include Packingham, Buttermilk, Ice Cream, and Tick Island sloughs as well as Istokpoga Creek west of the S-67 structure.

Surface water contributions from the KCOL (UCOL and the Headwaters Revitalization Lakes) provide important inflows to the Kissimmee River. To a lesser extent, direct rainfall and runoff from the surrounding watershed within the LKB are sources of water to the Kissimmee River as well. The largest inflow to the Kissimmee River is discharge from the S-65 structure at the southern end of Lake Kissimmee. **Appendix A** contains more information about contributing waterbodies associated with the Kissimmee River.

Channelization of the Kissimmee River reduced the length of the river from a more than 103-mile meandering river channel (166 kilometers (km)) to a relatively straight, almost 56-mile (90-km) long canal from Lake Kissimmee to Lake Okeechobee. Activities associated with the KRRP ultimately will backfill 22 miles (34 km) of the C-38 Canal, re-establish flow to 40 miles (64 km) of river channel, and seasonally inundate almost 25,000 acres (10,100 hectares) of floodplain wetlands (Bousquin et al. 2009).

3.5.2 Headwaters Revitalization Lakes

The approximate landward extent of the Headwaters Revitalization Lakes reservation waterbody (**Figure 3-5**) is the regulated high stage of 54 ft NGVD29 pursuant to the USACE's (1996) HRS. The reservation waterbody includes Lake Kissimmee, Lake Hatchineha, Tiger Lake, Tiger Creek, and Cypress Lake and their interconnecting canals: C-34 (south and north of the S-63A structure), C-35 (south of the S-61 structure), C-36, and C-37. The reservation waterbody also includes Zipprer Canal east of the G-103 structure located downstream of Lake Rosalie, and Jackson Canal south of the G-111 structure.

Contributing waterbodies include Lake Russell, Lower Reedy Creek south of the REED40 structure, Upper Reedy Creek north of the REED40 structure, Bonnet Creek, Lake Marion Creek, Lake Marion, Catfish Creek, Lake Pierce, Zipprer Canal west of the G-103 structure, Lake Rosalie, Weohyakapka Creek, Lake Weohyakapka, Otter Slough, Jackson Canal north of the G-111 structure, Lake Jackson, Parker Hammock Slough, Lake Marian, Fodderstack Slough, and No Name Slough. The northern extent of Bonnet and Upper Reedy creeks, regulated under this rule, terminate at U.S. Highway 192. The western extent of Otter Slough terminates at State Road 60. Parker Hammock Slough is located between Lakes Jackson and Marian. The eastern extent of No Name Slough, located at the southeastern portion of Lake Kissimmee, terminates at the western property boundary of the Three Lakes Wildlife Management Area.

In addition to SAS contributions, direct rainfall, and runoff from the surrounding watershed, the Headwaters Revitalization Lakes reservation waterbodies receive inflow from two other reservation waterbodies that represent the rest of the UCOL: Lake Tohopekaliga and Lake Gentry. Upper and Lower Reedy Creeks and Lake Russell, which provide flows from the northwestern corner of the basin, are collectively major contributing waterbodies to Cypress Lake and Lake Hatchineha. On the west side of the Headwaters Revitalization Lakes reservation waterbodies, there also is flow from Lake Marion via Lake Marion Creek, Lake Pierce via Catfish Creek, and Lake Weohyakapka via Weohyakapka Creek to Lake Rosalie and then to Lake Kissimmee via Zipprer Canal. Flows also come from Tiger Lake via Tiger Creek and Otter Slough. On the east side of the reservation waterbody, there is inflow from Parker Hammock Slough, Lake Marian, Lake Jackson via Jackson Canal, Fodderstack Slough, and No Name Slough. The S-65 structure controls water levels in the Headwaters Revitalization Lakes reservation waterbodies and governs releases from the KCOL to the Kissimmee River.

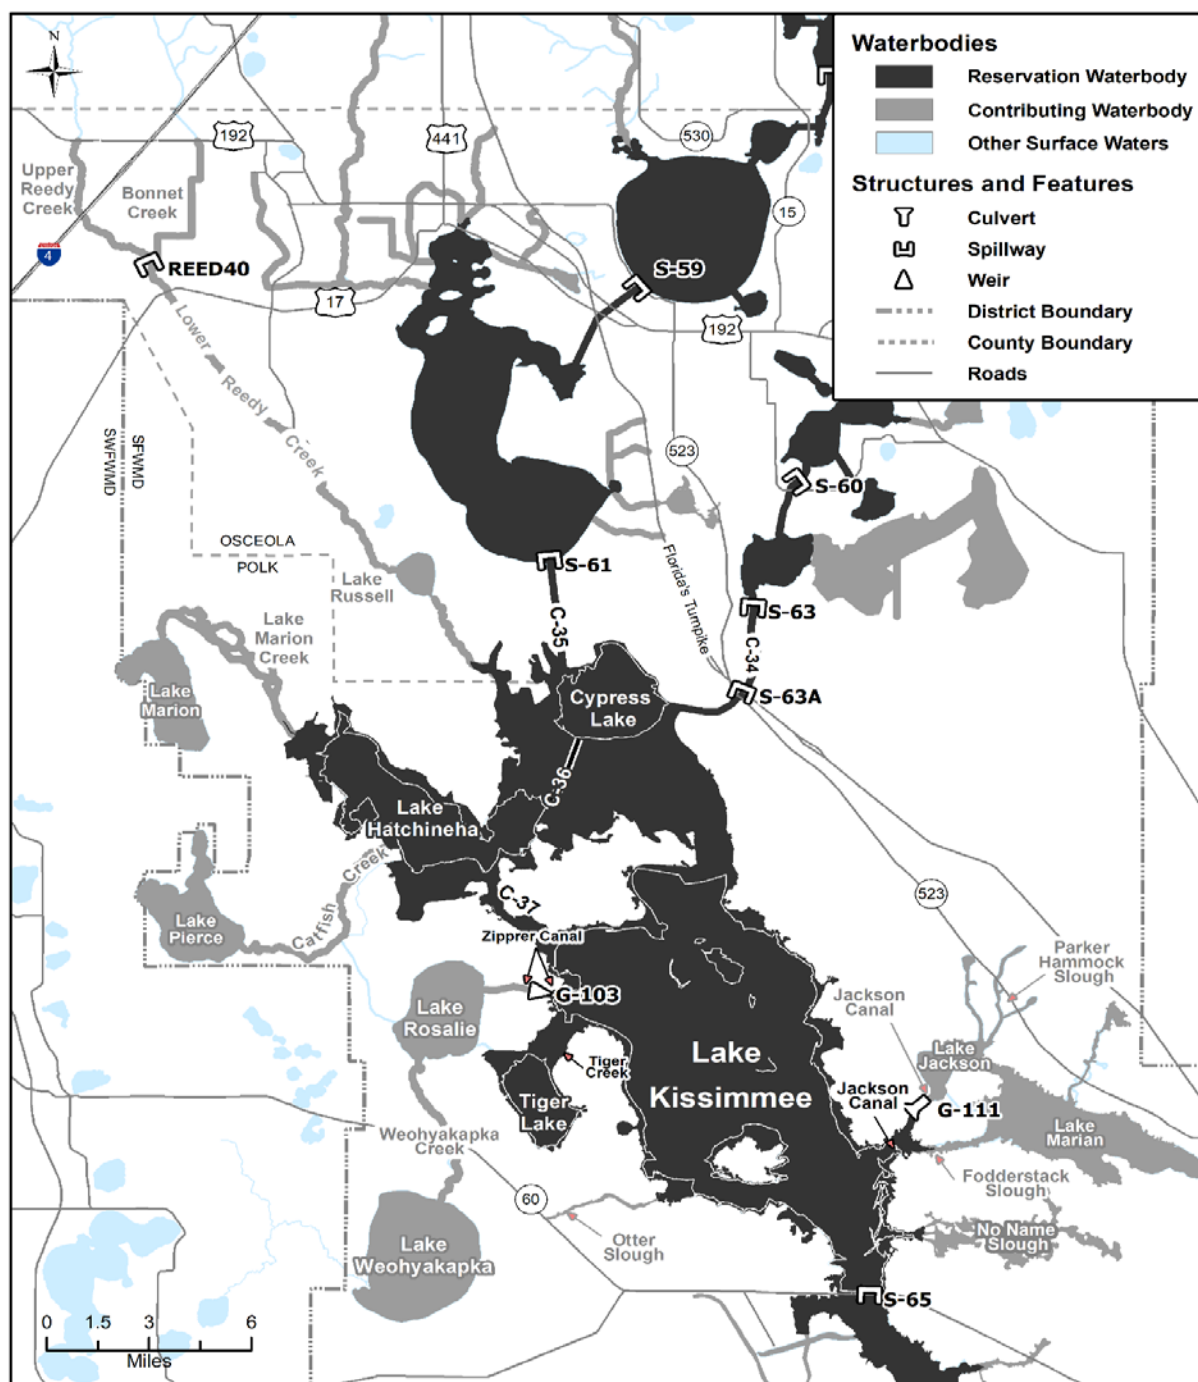


Figure 3-5. Headwater Revitalization Lakes reservation and contributing waterbodies.

In the future, stages within the Headwaters Revitalization Lakes will be raised in accordance with the new HRS, as approved by USACE, to provide the flows necessary to meet the ecological integrity goals of the KRRP. Most of the land surrounding the Headwaters Revitalization Lakes is in public ownership and managed for conservation. Much of the eastern side of Lake Kissimmee is surrounded by two state-owned parcels, Prairie Lakes and Three Lakes Wildlife Management Area. Lake Kissimmee State Park is located between Lake Rosalie and the western shoreline of Lake Kissimmee.

3.5.3 Upper Chain of Lakes

Table 3-2 provides information on the regulated high stage, surface area, volume, and average or maximum depths of each of the reservation waterbodies in the UCOL. While the lakes vary in size and volume, all are relatively shallow. The regulated high stage was used to define the boundaries of the reservation waterbodies to protect and maintain the wetland habitat used by fish and wildlife.

Table 3-2. Stage, surface area, volume, average depth, and maximum depth for the Upper Chain of Lakes reservation waterbodies.

Waterbody	Regulated High Stage ¹ (feet)	Area ² (acres)	Volume ³ (acre-feet)	Average Depth ⁴ (feet)	Maximum Depth (feet)
Lakes Hart-Mary Jane	61.0	3,811	25,936	7	22
Lakes Myrtle-Preston-Joel	62.0	2,750	10,014	4	11
Alligator Chain of Lakes	64.0	7,401	57,381	8	32
Lake Gentry	61.5	1,947	16,655	9	19
East Lake Tohopekaliga	58.0	12,898	78,424	6	28
Lake Tohopekaliga	55.0	22,018	145,323	7	13

¹ The extent of the reservation waterbodies in the Upper Chain of Lakes is defined as the upper elevation of the stage regulation schedule (in NGVD29) approved by the United States Army Corps of Engineers.

² Surface area is at the upper elevation of the stage regulation schedule.

³ Volume was calculated from stage storage tables.

⁴ Average depth was calculated as volume divided by surface area.

3.5.3.1 Lakes Hart-Mary Jane

The approximate extent of the Lakes Hart-Mary Jane reservation waterbody (**Figure 3-6**) is defined by the regulated high stage of 61 ft NGVD29, pursuant to USACE's lake regulation schedule. The Lakes Hart-Mary Jane reservation waterbody includes Lake Hart, Lake Mary Jane, and Lake Whippoorwill. In addition to the lakes proper, the reservation waterbody includes the Whippoorwill, C-29, C-29A (north of the S-62 structure), and C-30 (north of the S-57 structure) canals. The canal features serve as direct hydrologic connections to Lakes Hart and Mary Jane for conveyance of water through the system. Lake Whippoorwill connects directly to the west side of Lake Hart via the Whippoorwill Canal. As there is no structural divide, Lake Whippoorwill and Whippoorwill Canal are considered part of the Lakes Hart-Mary Jane reservation waterbody.

The Lake Hart-Mary Jane reservation waterbody receives inflow from the Lakes Myrtle-Preston-Joel reservation waterbody via the C-30 Canal (**Figure 3-6**). It also receives water from the SAS, direct rainfall, and runoff from the surrounding watershed. The outlet from the Lakes Hart-Mary Jane reservation waterbody is the S-62 structure, located at the southern end of Lake Hart, which controls water levels in Lakes Hart, Mary Jane, and Whippoorwill. Water from the lakes is discharged into the C-29A Canal and conveyed to the East Lake Tohopekaliga reservation waterbody. There are no contributing waterbodies associated with this reservation waterbody.

Rural residential development occurs along a portion of the shoreline of these lakes. South of the C-29 Canal, between Lakes Hart and Mary Jane, are parts of Orange County's Moss Park and the Split Oak Forest Wildlife and Environmental Area.

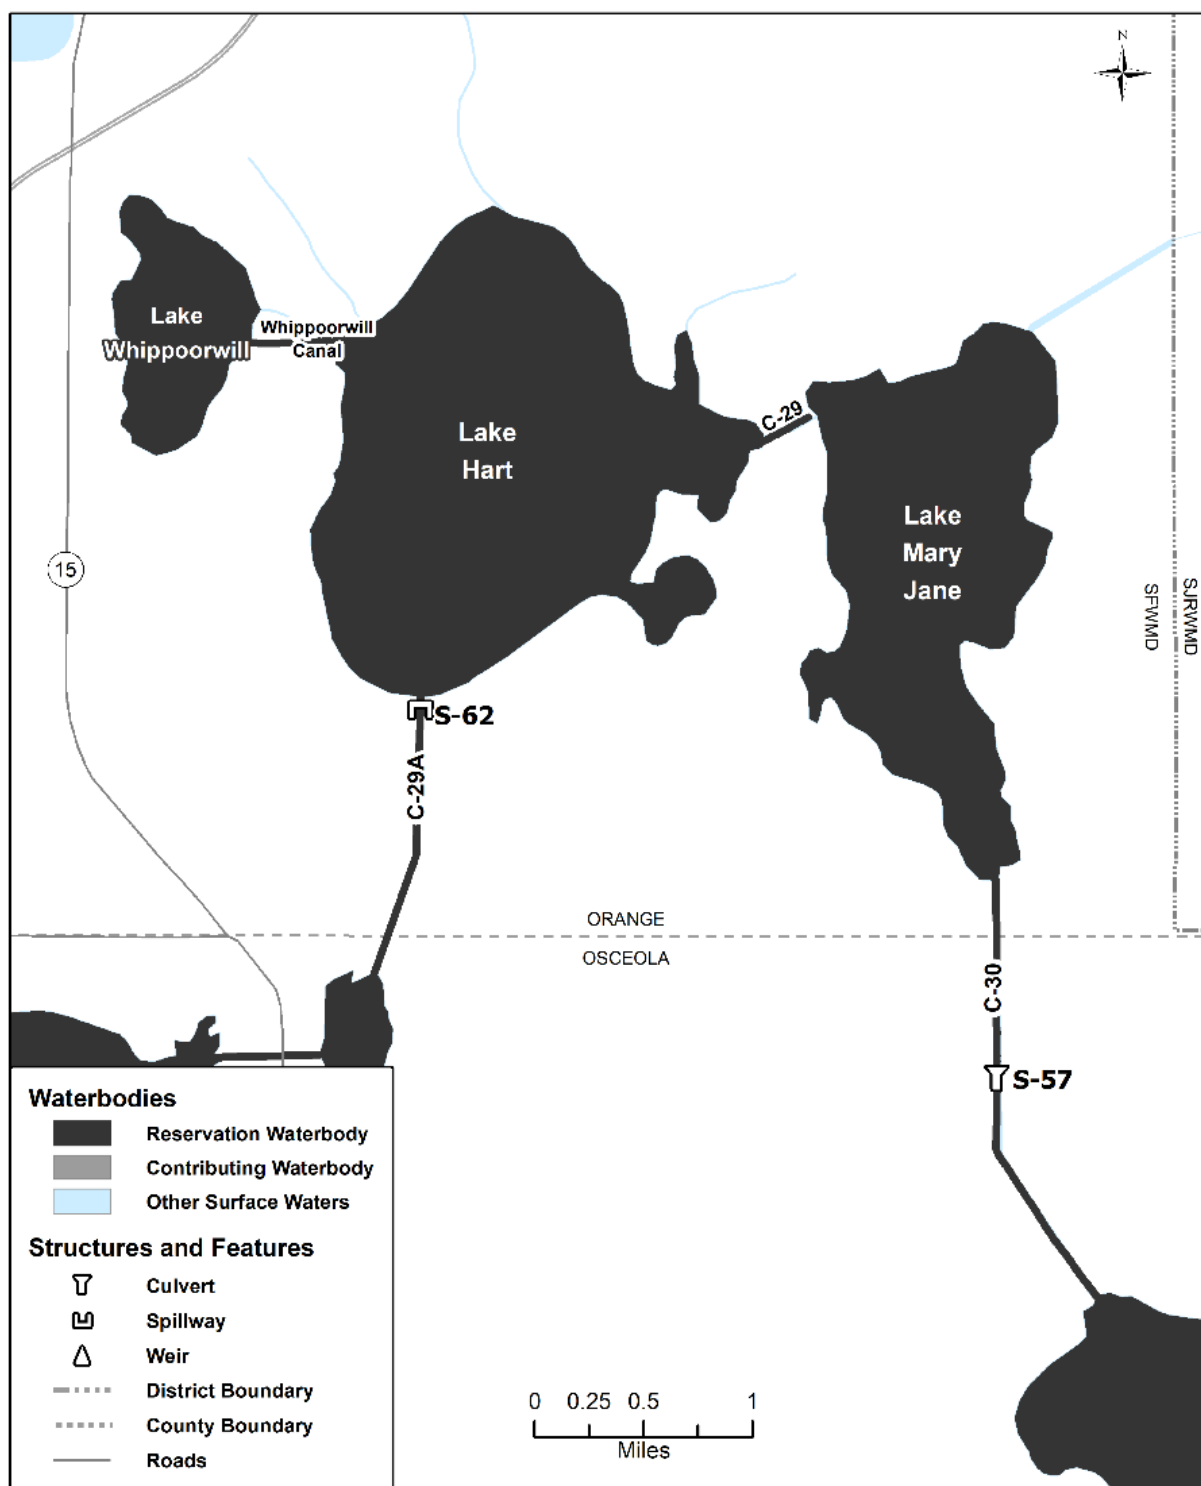


Figure 3-6. Lakes Hart-Mary Jane reservation waterbody (no contributing waterbodies present).

3.5.3.2 Lakes Myrtle-Preston-Joel

The approximate landward extent of the Lakes Myrtle-Preston-Joel reservation waterbody (**Figure 3-7**) is defined by the regulated high stage of 62 ft NGVD29, pursuant to the USACE's lake regulation schedule. The Lakes Myrtle-Preston-Joel reservation waterbody includes Lake Myrtle, Lake Preston, and Lake Joel. In addition to the lakes proper, the reservation waterbody includes the C-30 (south of the S-57 structure), C-32B, C-32C (north of the S-58 structure), and Myrtle-Preston canals. These canals provide a direct hydrologic connection between Lakes Myrtle, Preston, and Joel.

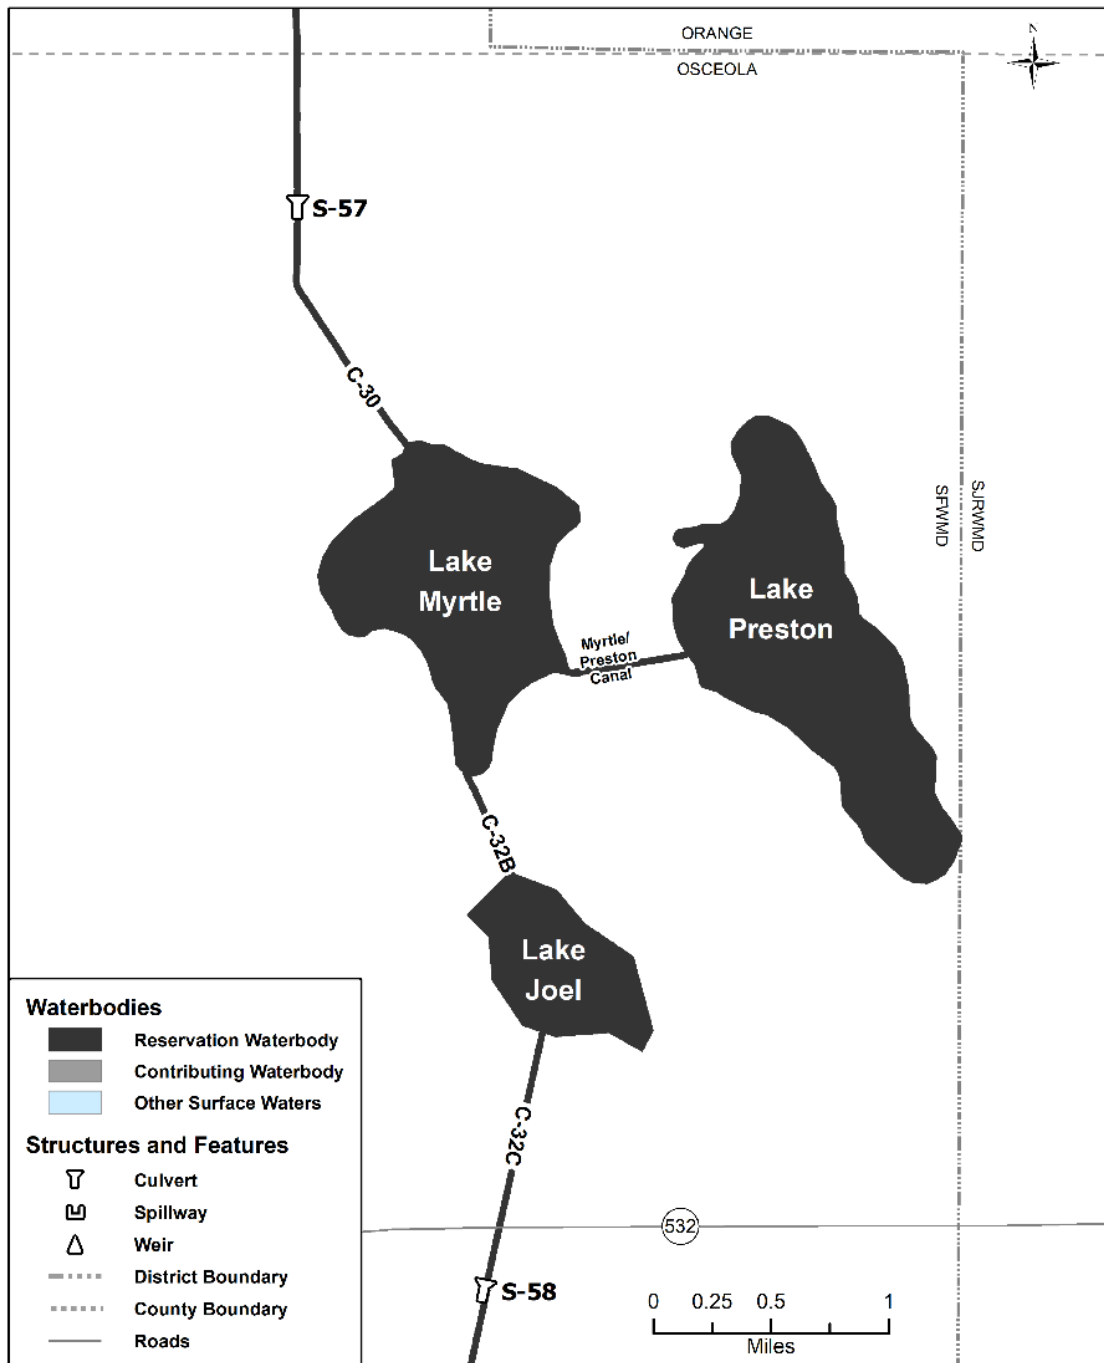


Figure 3-7. Lakes Myrtle-Preston-Joel reservation waterbodies (no contributing waterbodies present).

The main sources of water to the Lakes Myrtle-Preston-Joel reservation waterbody are the SAS, direct rainfall, and runoff from the surrounding watershed. The Lakes Myrtle-Preston-Joel reservation waterbody can receive water from the Alligator Chain of Lakes via the S-58 structure. However, this structure is rarely used and generally serves as a divide structure in the system, with water north of the S-58 structure flowing northward through Lakes Myrtle-Preston-Joel and water south of the structure flowing southward through the system.

Downstream from Lake Myrtle in the C-30 Canal, the principal outlet from the Lakes Myrtle-Preston-Joel reservation waterbody is the S-57 structure, which controls water levels in Lakes Myrtle-Preston-Joel and regulates outflow through the C-30 Canal toward Lake Mary Jane. When water levels in Lakes Myrtle-Preston-Joel are higher than the Alligator Chain of Lakes, water may flow through the S-58 structure into Trout Lake. Ordinarily, this movement of water is prevented by higher water levels in the Alligator Chain of Lakes. There are no contributing waterbodies associated with this reservation waterbody.

The Lakes Myrtle-Preston-Joel watershed is relatively small but approximately nine times the area of the lakes themselves. The shorelines of these lakes are within Osceola County's Urban Growth Area and are in the process of being converted into residential and mixed uses. Several environmental resource and water use permits have been issued for a development called Sunbridge.

3.5.3.3 Alligator Chain of Lakes

The approximate extent of the Alligator Chain of Lakes reservation waterbody (**Figure 3-8**) is defined by the regulated high stage of 64 ft NGVD29, pursuant to the USACE's lake regulation schedule. The Alligator Chain of Lakes reservation waterbody includes Lake Center, Coon Lake, Trout Lake, Lake Lizzie, Live Oak Lake, Sardine Lake, Alligator Lake, and Brick Lake. In addition to the lakes proper, the reservation waterbody includes multiple canals: C-32C south of the S-58 structure, C-32D, Center-Coon, C-32F, C-32G, Live Oak, Sardine, Brick, and C-33 north of the S-60 structure. Live Oak Lake and Sardine Lake connect directly to the west side of Alligator Lake via the Live Oak and Sardine canals. As there are no control structures within these canals, Live Oak and Sardine Lakes are considered part of the Alligator Chain of Lakes reservation waterbody. All these waterbodies have direct connections to the upstream, downstream, or lateral waterbodies by means of a canal. Buck Lake and Buck Slough are contributing waterbodies because their hydrologic connection to Alligator Lake occurs through an ephemeral slough system rather than directly through a canal.

The sources of water to the Alligator Chain of Lakes reservation waterbody are the SAS, direct rainfall, and runoff from the surrounding watershed. Some inflow from the Lakes Myrtle-Preston-Joel reservation waterbody is possible under certain conditions.

Located at the southern end of Alligator Lake, the primary outlet from the Alligator Chain of Lakes is the S-60 structure, which controls water levels in all the Alligator Chain of Lakes waterbodies and releases water to Lake Gentry. Some surface water releases can be made from the north end of the Alligator Chain of Lakes reservation waterbody through the S-58 structure to the Lakes Myrtle-Preston-Joel reservation waterbody. Extensive residential development exists along some of the shorelines in the Alligator Chain of Lakes.

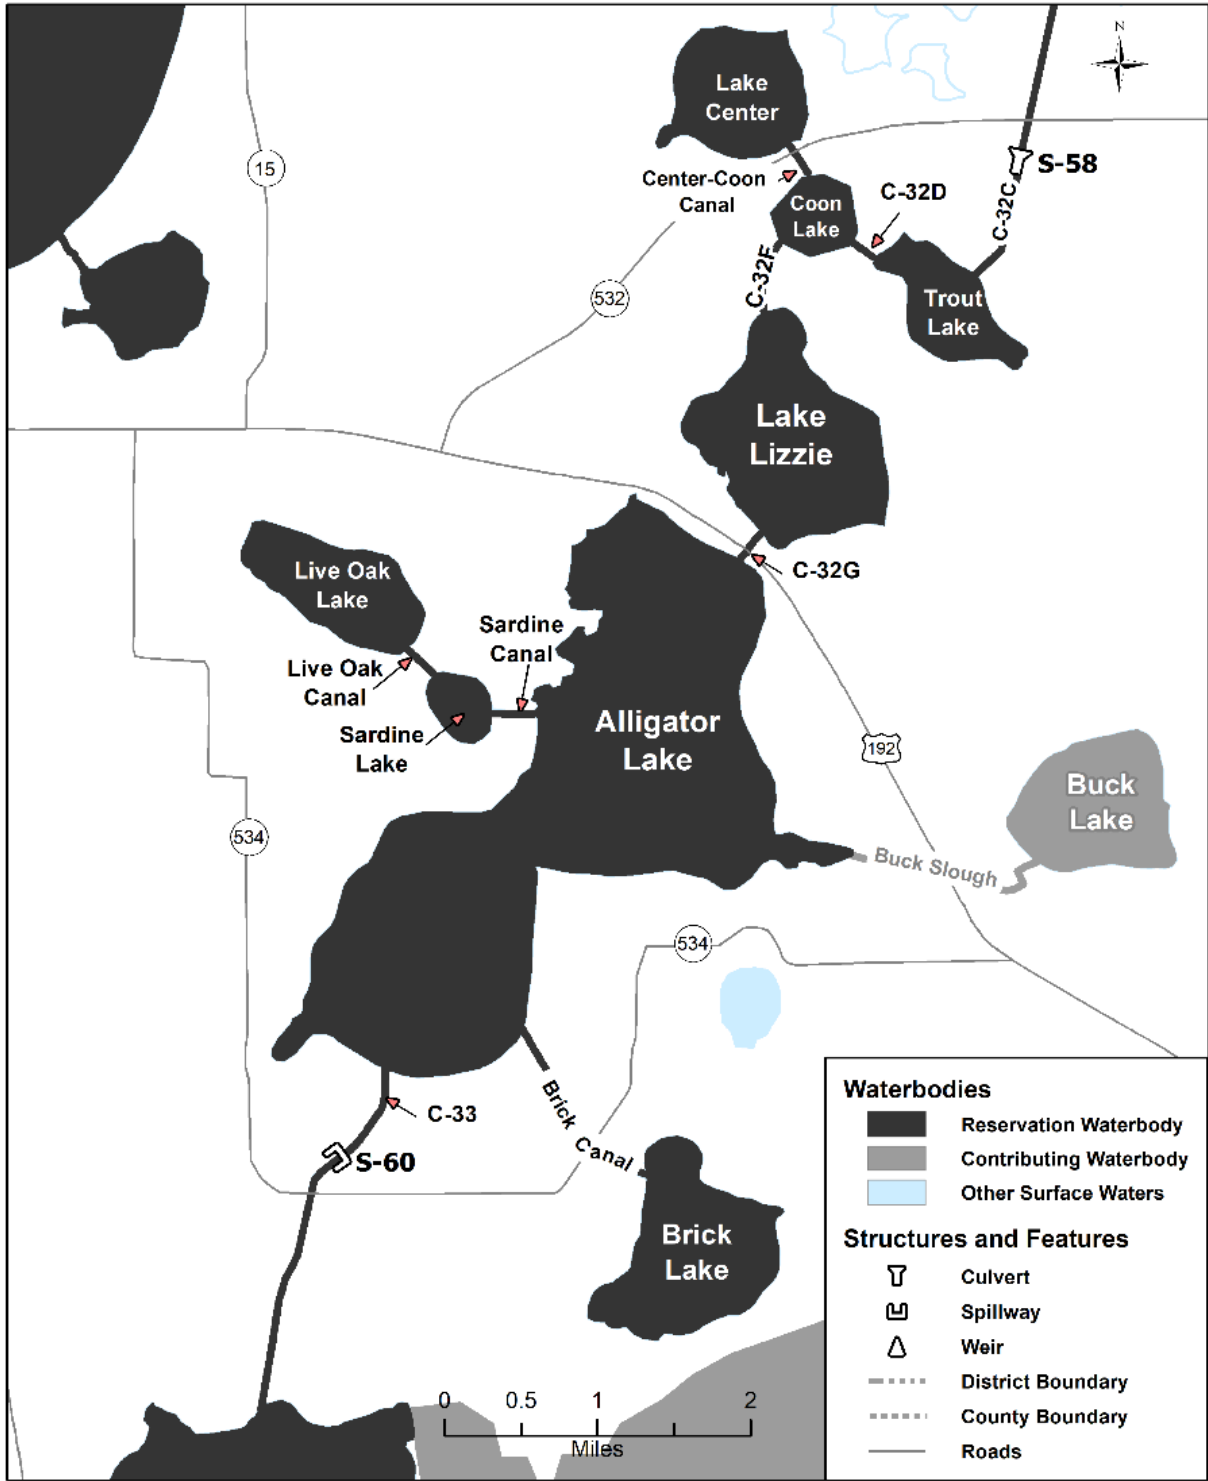


Figure 3-8. Alligator Chain of Lakes reservation and contributing waterbodies.

3.5.3.4 Lake Gentry

The approximate landward extent of the Lake Gentry reservation waterbody (**Figure 3-9**) is defined by the regulated high stage of 61.5 ft NGVD29, pursuant to USACE's lake regulation schedule. The reservation waterbody includes a single lake - Lake Gentry. In addition to the lake proper, the reservation waterbody includes the C-34 Canal north of the S-63 structure and the C-33 Canal south of the S-60 structure.

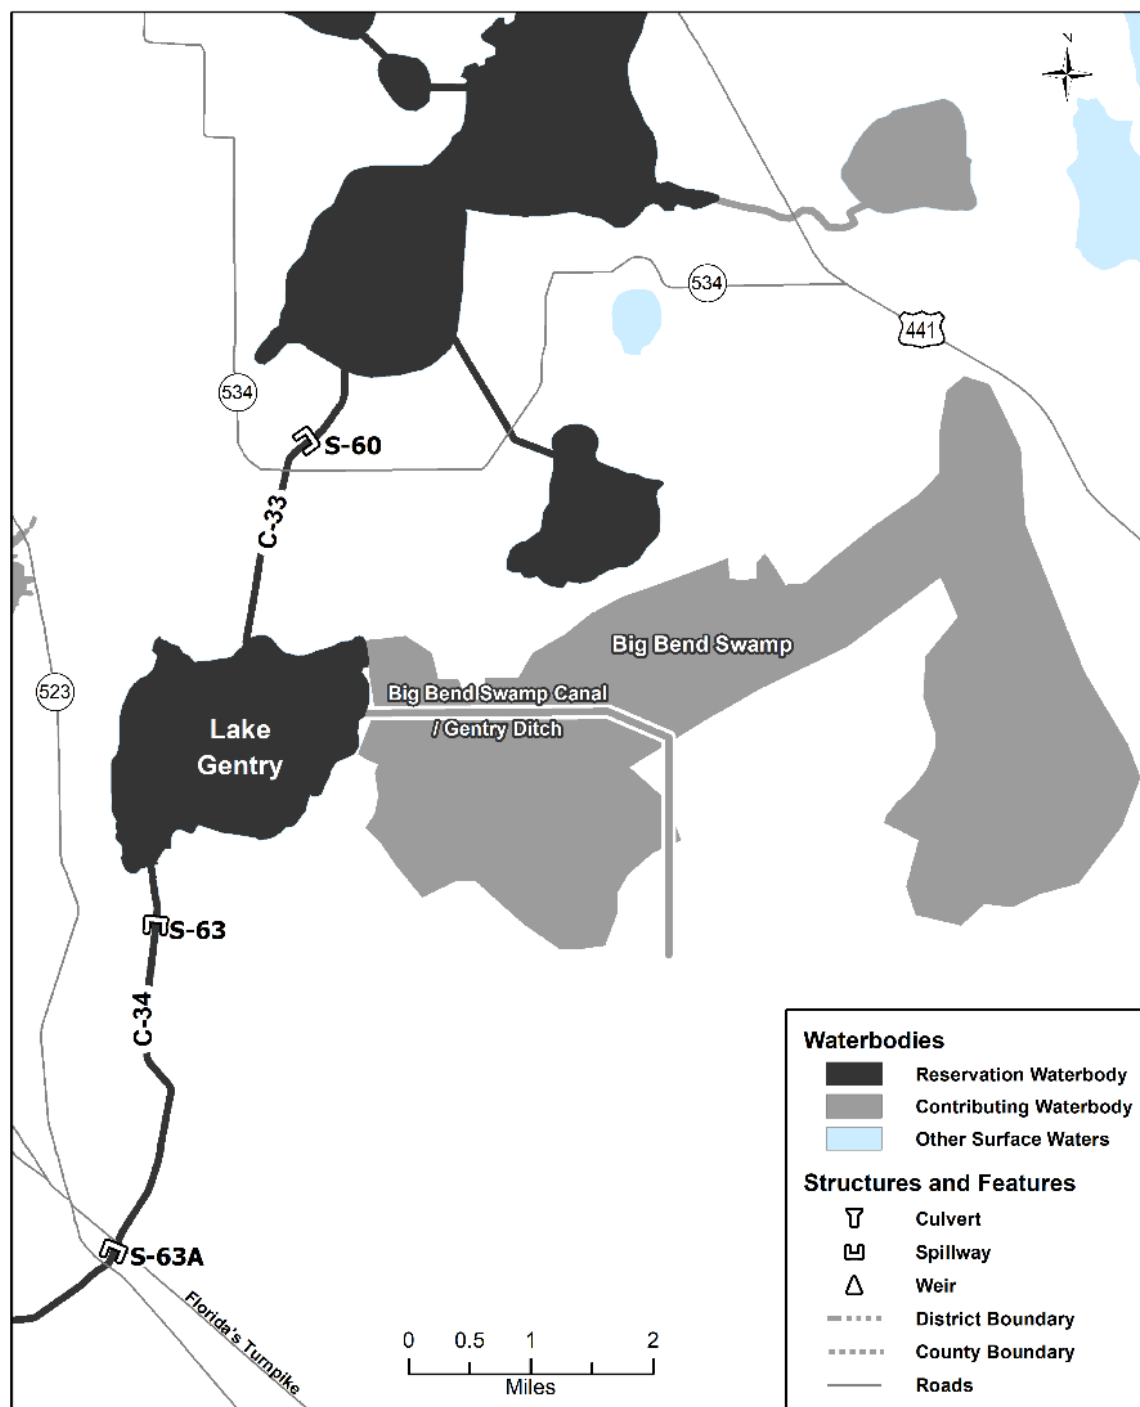


Figure 3-9. Lake Gentry reservation and contributing waterbodies.

Big Bend Swamp and Big Bend Swamp Canal/Gentry Ditch are contributing waterbodies that drain into the east side of Lake Gentry. Big Bend Swamp Canal/Gentry Ditch drains both wetland and uplands downstream to Big Bend Swamp. The southeastern extent of Big Bend Swamp Canal/Gentry Ditch terminates at the line between Sections 23 and 26, Township 27, Range 31.

In addition to SAS contributions, direct rainfall, and runoff from the surrounding watershed, Lake Gentry receives surface water inflows from the Alligator Chain of Lakes reservation waterbody through the C-33 Canal and from Big Bend Swamp along the eastern shore of the lake.

Water levels in Lake Gentry are regulated by the S-63 structure, located approximately 2,900 ft downstream of the lake on the C-34 Canal. This structure also controls releases from Lake Gentry into Lake Cypress via a second structure, S-63A, which is approximately halfway between the S-63 structure and Lake Cypress. The S-63A structure is used to step-down stages in the C-34 Canal. The shoreline of Lake Gentry is relatively undeveloped, with only some rural lakeside residences.

3.5.3.5 East Lake Tohopekaliga

The approximate landward extent of the East Lake Tohopekaliga reservation waterbody (**Figure 3-10**) is defined by the regulated high stage of 58 ft NGVD29, pursuant to USACE's lake regulation schedule. The East Lake Tohopekaliga reservation waterbody includes East Lake Tohopekaliga, Lake Runnymede, Fells Cove, and Ajay Lake. In addition to the lakes proper, the reservation waterbody includes multiple canals: C-29A south of the S-62 structure, C-29B, Runnymede, and C-31 northeast of the S-59 structure. Ajay Lake and Fells Cove are upstream of East Lake Tohopekaliga and directly connected through the canals mentioned above. Lake Runnymede is southeast of East Lake Tohopekaliga and directly connected to the lake by the Runnymede Canal. As there is no structural divide, Lake Runnymede and Runnymede Canal are considered part of the East Lake Tohopekaliga reservation waterbody. The reservation waterbody does not include the stormwater management lakes located along the southern shoreline of East Lake Tohopekaliga within the City of St. Cloud.

In addition to SAS contributions, direct rainfall, and runoff from the surrounding watershed, there are two major inflows into East Lake Tohopekaliga. The first is Boggy Creek, which enters the lake from the northwestern corner. The second is Ajay Lake via the East Tohopekaliga Canal (C-29A Canal) from the Lakes Hart-Mary Jane reservation waterbody. Minor inflow occurs from Lake Runnymede on the southeast shore.

The S-59 structure, located at the southern end of East Lake Tohopekaliga, controls water levels in East Lake Tohopekaliga, Fells Cove, Ajay Lake, and Lake Runnymede. The S-59 structure releases water into the C-31 (St. Cloud) Canal, which enters the Lake Tohopekaliga reservation waterbody through Goblet's Cove.

Extensive residential development exists along the shoreline of these lakes. It is most intensely developed along the south shore of East Lake Tohopekaliga, where the City of St. Cloud is located. More recent residential development has occurred in the northeastern portion of this reservation waterbody, around Fells Cove.

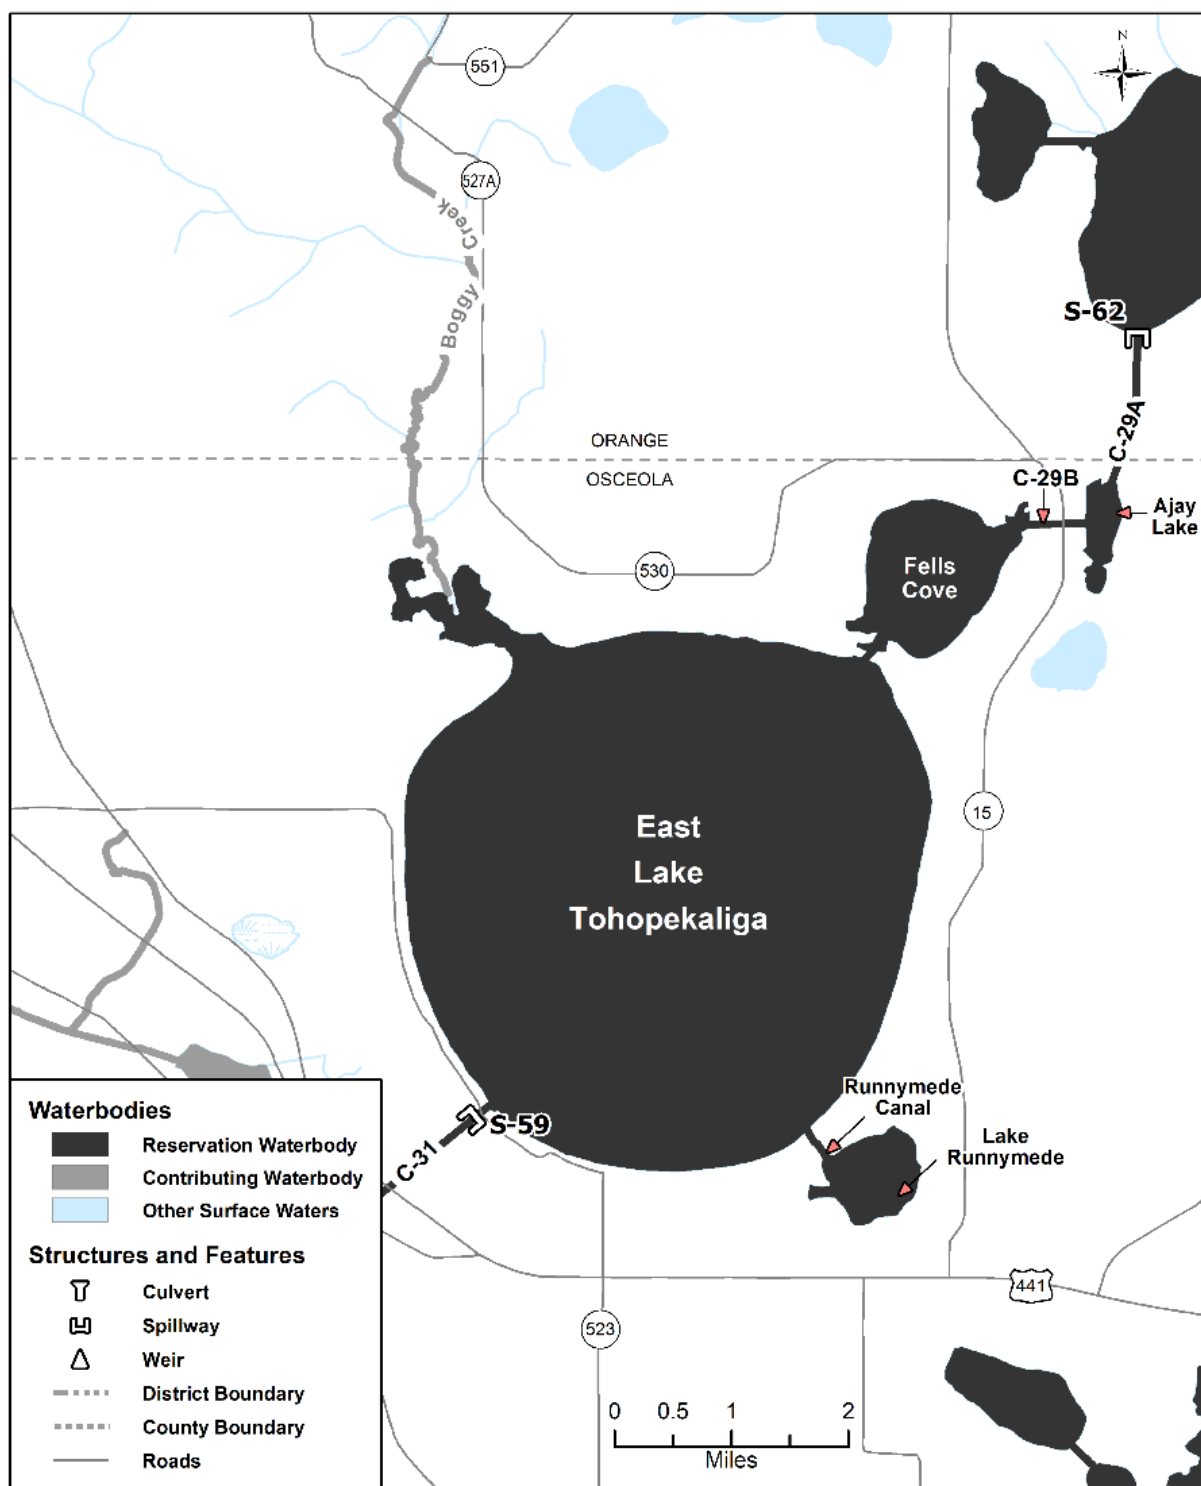


Figure 3-10. East Lake Tohopekaliga reservation and contributing waterbodies.

3.5.3.6 Lake Tohopekaliga

The approximate landward extent of the Lake Tohopekaliga reservation waterbody (**Figure 3-11**) is defined by the regulated high stage of 55 ft NGVD29, pursuant to USACE's lake regulation schedule. The Lake Tohopekaliga reservation waterbody is the largest reservation waterbody within the UCOL, covering approximately 22,000 acres (8,900 hectares; **Table 3-2**). The reservation waterbody also includes the C-31 Canal southwest of the S-59 structure.

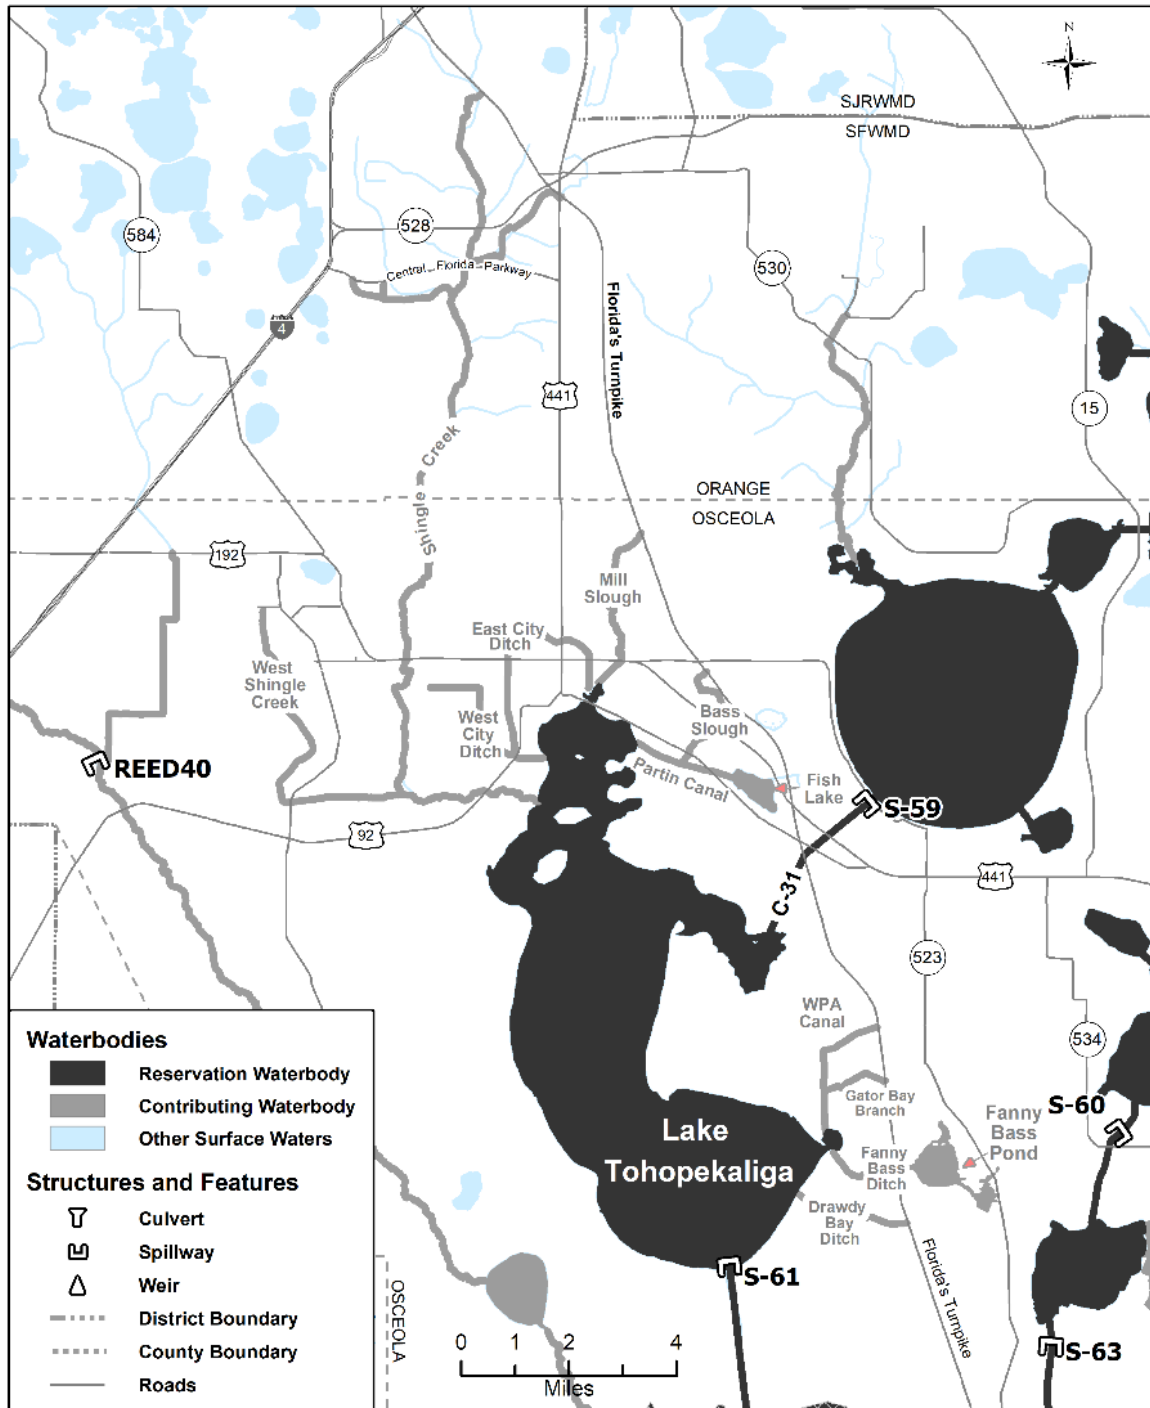


Figure 3-11. Lake Tohopekaliga reservation and contributing waterbodies.

In addition to SAS contributions, direct rainfall, and runoff from the surrounding watershed, the Lake Tohopekaliga reservation waterbody receives inflow from the East Lake Tohopekaliga reservation waterbody via the C-31 Canal. There also are major inflows from a major contributing waterbody—Shingle Creek, which flows from the City of Orlando southward and enters Lake Tohopekaliga at its northern end. Additional contributing waterbodies include Fish Lake, Mill Slough, West Shingle Creek, Fanny Bass Pond, Bass Slough, Partin Canal, East City Ditch, West City Ditch, Works Progress Administration Canal, Gator Bay Branch, Fanny Bass Ditch, and Drawdy Bay Ditch. Some of these contributing waterbodies discharge to this reservation waterbody via existing channelized conveyance systems. The northern extent of Shingle Creek, Mill Slough, Bass Slough, Works Progress Administration Canal, Drawdy Bay Ditch, and Gator Bay Branch contributing waterbodies terminate at Florida's Turnpike. The northwestern branch of Shingle Creek ends at the Central Florida Parkway. West Shingle Creek terminates at Camelot Country Way. The eastern extent of the Fanny Bass Pond wetland complex terminates at County Road 523. The S-61 structure controls water levels in the Lake Tohopekaliga reservation waterbody and releases water into the C-35 (Southport) Canal, which flows into Lake Cypress.

The City of Kissimmee is located on the northwest shore of Lake Tohopekaliga. Extensive residential and commercial development exists around much of the lake. The surrounding areas are within the Osceola County Urban Growth Area.

CHAPTER 4: FISH AND WILDLIFE RESOURCES AND HYDROLOGIC REQUIREMENTS

4.1 Kissimmee River and Headwaters Revitalization Lakes

Following completion of the C-38 Canal in 1971 by the C&SF Project, numerous state and federal planning and feasibility studies (USACE 1991, 1996), demonstration projects (e.g., Loftin et al. 1990a; Toth 1991, 1993), modeling efforts (e.g., Loftin et al. 1990b), legislative actions, appropriations, and other actions led to the authorization of the KRRP. The *Central and Southern Florida Project Final Integrated Feasibility Report and Environmental Impact Statement Environmental Restoration Kissimmee River, Florida* (USACE 1991) describes the recommended plan for the KRRP, including an environmental impact statement (EIS) that addresses the National Environmental Policy Act, Endangered Species Act, and other concerns. The United States Fish and Wildlife Service (USFWS) *Fish and Wildlife Coordination Act Report on the Kissimmee River Restoration Project* is included in the USACE (1991) report as Annex E. In 1992, the United States Congress passed the Water Resources Development Act (Public Law 102-580). Section 101 of the act authorizes the KRRP and its Headwaters Revitalization components, including the HRS. The KRRP represents the culmination of considerable public participation and investment. The final cost to restore the Kissimmee River currently is estimated at almost \$800 million. The project is a partnership between the SFWMD and USACE and is equally cost-shared between the state and federal governments.

An integral operational component of the KRRP was the development of a new regulation schedule for the S-65 structure at the outlet from the Headwaters Revitalization Lakes to the Kissimmee River. The new HRS was designed to provide the flows necessary to meet the KRRP's hydrologic and ecological integrity goals. The HRS was authorized by Congress in 1992 as part of the Water Resources Development Act and the KRRP. In 1994, the USFWS completed the *Fish and Wildlife Coordination Act Report on Kissimmee Headwaters Lakes Revitalization Plan* (USFWS 1994) pursuant to the requirements of the Fish and Wildlife Coordination Act and the Endangered Species Act of 1973. The technical analysis associated with the HRS was completed in April 1996 and is described in the *Central and Southern Florida Project, Kissimmee River Headwaters Revitalization Project: Integrated Project Modification Report and Supplement to the Final Environmental Impact Statement* (USACE 1996). In November 1996, the USACE issued its record of decision approving the recommended plan, including the construction plan and schedule change, described in USACE (1996), finding it "to be economically justified, in accordance with environmental statutes, and in the public interest."

The HRS will increase storage in the Headwaters Revitalization Lakes to retain water during wetter periods for release, as needed, to the river in order to replicate historical flow characteristics. A major component of the state's investment in the project was the acquisition of land to create additional storage to allow natural inundation of the Kissimmee River floodplain.

Reconstruction of the river has been occurring in phases since the late 1990s. At the time of this writing, the physical project is expected to be complete in December 2020. Until KRRP construction is complete, the HRS cannot be fully implemented. Following completion of Phase I construction in 2001, an interim regulation schedule for the S-65 structure has been used to provide partial floodplain inundation and restore habitat in the reconnected river channels. This interim schedule will continue to be used until construction is complete and the HRS can be fully implemented.

Fish, wildlife, and habitat responses within the KRRP areas and unrestored control areas are being tracked by the SFWMD's Kissimmee River Restoration Evaluation Program using river/floodplain restoration performance measures. Monitoring results for the river channel and floodplain have been reported annually

in the *South Florida Environmental Report* since 2005 as new data become available; Koebel et al. (2020) contains the most recent monitoring data and trends. Responses also were summarized in a special section of the international peer-reviewed journal *Restoration Ecology* in 2014, including results for hydrology (Anderson 2014a), river channel geomorphic characteristics of habitat (Anderson 2014b), dissolved oxygen (Colangelo 2014), vegetation in the river channel (Bousquin and Colee 2014) and floodplain (Spencer and Bousquin 2014), aquatic macroinvertebrates (Koebel et al. 2014), fish (Jordan and Arrington 2014), and wading birds and waterfowl (Cheek et al. 2014). To date, ecological responses to the first three construction phases have been most pronounced in the river channel. Floodplain metrics are expected to improve dramatically following implementation of the HRS.

To fully capitalize on federal and state authorizations and associated funding, it is essential to ensure the water needed to achieve hydrologic improvements to meet the KRRP's ecological integrity goal is reserved for its intended use (including protection of fish and wildlife) and not allocated to consumptive uses. As a result, the SFWMD initiated the Water Reservation rule development process for the Kissimmee River and Chain of Lakes.

This chapter is an update of the material from the 2009 draft technical document (SFWMD 2009) for the Kissimmee River and Chain of Lakes Water Reservations. The technical foundation is the same and, therefore, has been peer reviewed (**Appendix E**).

4.2 Kissimmee River Fish and Wildlife Resources and Hydrologic Requirements

This section and **Appendix F** describe the vegetation and fish and wildlife resources that occur in the Kissimmee River and floodplain. This section includes fish and bird communities; **Appendix F** includes plant communities, amphibians and reptiles, and mammals as well as detailed species lists for all animal taxa described here and in **Appendix F**. The focus of these descriptions is on higher taxa that depend on the river and floodplain to meet their reproductive, feeding, and other survival needs for one or more life cycle stages. Hydrologic requirements of the major floodplain vegetation groups as well as fish and wildlife also are discussed here and in **Appendix F**. Additional information on Kissimmee River fish and wildlife and associated habitat resources of the Kissimmee River and floodplain can be found in USACE (1991) Sections 9.8.3 and 9.8.4 and Annex D; Koebel et al. (2014; invertebrates); Cheek et al. (2014; waterbirds); Spencer and Bousquin (2014; floodplain vegetation); Bousquin and Colee (2014; river channel vegetation); Colangelo (2014; dissolved oxygen); Jordan and Arrington (2014; piscivorous fish); Anderson et al. (2005); Koebel and Bousquin (2014); and Bousquin et al. (2005b).

Important native fish and wildlife resources were associated with the Kissimmee River prior to its channelization. Many species of fish and wildlife declined in abundance or disappeared from the area after the river was channelized and its floodplain drained (Toth 1993). Monitoring conducted by the SFWMD's Kissimmee River Restoration Evaluation Program tracks the fish and wildlife currently associated with the Kissimmee River and changes occurring during the transition period between the start of construction and future restoration. Since completion of Phase I construction of the KRRP in 2001, which restored flow to an initial 14 miles of river channel, there were increases in the use of the river channel and parts of the floodplain by some fish and wildlife (Bousquin et al. 2007, 2009). These changes, which are consistent with those predicted by Kissimmee River Restoration Evaluation Program performance measures for the river channel (Anderson et al. 2005), demonstrate the linkage between hydrology in the river channel and floodplain and their use by fish and wildlife, which is the basis for the river restoration effort. Less robust changes have occurred on the floodplain compared to the river channel because the project has not yet provided sufficient floodplain inundation. Floodplain recovery is expected after implementation of the HRS with appropriate water management operations.

4.2.1 Kissimmee River Fish

A total of 52 species of fish have been collected from the Kissimmee River and its floodplain (**Appendix F**, Table F-2). Of these species, 39 were reported in the river before channelization (Florida Game and Fresh Water Fish Commission 1957). Although there were significant changes in the structure of the fish community following channelization (described below), only one species, the blackbanded darter (*Percina nigrofasciata*), was lost (Trexler 1995). Six exotic species have invaded or been released into the system since the 1950s. Fish species occurring in the Kissimmee River system represent a range of trophic levels (herbivore, piscivore, omnivore, invertivore, planktivore, and detritivore), consume foods from both aquatic and terrestrial environments (Karr et al. 1986), and serve as a critical link in the energy pathway between primary producers and higher trophic level consumers, including amphibians, reptiles, and birds (Karr et al. 1992, Gerking 1994).

Most fish species in the Kissimmee River use the floodplain for feeding and reproduction (Trexler 1995). This is shown by the guild classification in **Appendix F**, Table F-2. Fifteen native species belong to the Off-channel Specialist Guild, which contains species usually found in off-channel habitats or are limited to non-flowing vegetated waters throughout their life. Many of these species are small forage fish, such as mosquito fish (*Gambusia holbrooki*) and the least killifish (*Heterandria formosa*). These fish are important prey for game fish and wading birds foraging on the floodplain. Another 23 native species and 5 exotic species belong to the Off-channel Dependent Guild, whose members require access to or use of off-channel habitats or are limited to non-flowing, vegetated waters for some portion of their life cycle. The 38 native species that depend on an inundated floodplain for some stage in the life cycle constitute 74% of the species currently in the river.

4.2.1.1 Hydrologic Requirements of Kissimmee River Fish

The species that compose riverine fish communities are adapted to seasonally fluctuating flow (Poff and Allan 1995, Poff et al. 1997) and use inundated floodplain habitat during the seasonal flood pulse of water onto and off the floodplain, a pattern seen in other medium to large rivers (Welcomme 1979, Junk et al. 1989). Before channelization, the Kissimmee River experienced a flood pulse that began with high flows near the end of the summer-fall wet season. The pulse inundated much of the floodplain for an extended period of time during most years (Toth et al. 2002). The pulse had a gradual recession over the dry season, with lower flow continuing until the next flood event.

Seasonality, an important aspect of the flood pulse in the Kissimmee River, is reflected in the timing of the maximum and minimum average monthly flows and a gradual transition from the maximum to the minimum (recession). If the timing of this seasonal pattern is notably altered, organisms may not be able to reproduce, survival of progeny may suffer, and other life-history requirements may not be met. In Florida rivers, Bonvechio and Allen (2005) found that recruitment of sunfish (Centrarchidae) was affected by the timing of high flows. High flows during or soon after spawning could damage nests or displace offspring. High flows before spawning in the pre-regulated system allowed adults access to the floodplain where more invertebrate prey would be available. Three or more consecutive years with disrupted seasonality of flow could reduce the abundance of sunfish (Bonvechio and Allen 2005).

Off-channel dependent fish need seasonally high water levels above the banks of the river channel to access the floodplain for reproduction and foraging (Scheaffer and Nickum 1986, Winemiller and Jepsen 1998; **Figure 4-1**). For example, largemouth bass (*Micropterus salmoides*) require water depths of 2 to 4 ft (60 to 120 cm) for nest construction, and their fry require densely vegetated habitat as refugia (**Appendix F**, Table F-2). The time required for this process is as follows: nest construction and spawning, 1 to 3 days; egg incubation, 3 to 4 days; time for eggs to hatch and for hatchlings to fully develop as fry (swim-up), 5 to 8 days; parental guarding of fry, 7 to 14 days; and schooling by fry after abandonment, 26 to 31 days.

Therefore, bass require appropriate inundation characteristics for 42 to 60 days for a single spawning event that may occur between December and May. In addition to largemouth bass, other off-channel dependent fish taxa spawn throughout the year, especially several ecologically and sociopolitically significant game fish (**Appendix F**, Table F-2). For instance, bluegill (*Lepomis macrochirus*) and redear sunfish (*Lepomis microlophus*) are known to spawn in Florida between February and October, whereas spotted sunfish (*Lepomis punctatus*) spawn between May and November (Carlander 1977). When all centrarchid taxa are considered (including largemouth bass), spawning may occur during any month of the year (**Appendix F**, Table F-2).

High water levels are needed to create hydroperiods and water depths to maintain large areas of the Broadleaf Marsh plant community, which provides forage and refuge from predation for early life stages of large-bodied fish (Savino and Stein 1982, Toth 1990, Winemiller and Jepsen 1998). Inundation of the floodplain also creates foraging opportunities by creating habitat for the secondary production of aquatic invertebrates and forage fish (Gladden and Smock 1990, Winemiller and Jepsen 1998). In tropical floodplain rivers, the yield of fish in one year is positively related to the area of floodplain inundated in previous years (Welcomme and Hagborg 1977).

When the floodplain is not inundated, flow is still required to maintain habitat characteristics in the river channel. Based on studies conducted during the Pool B Demonstration Project, a minimum flow of 250 cubic feet per second (cfs) was needed during the summer to maintain dissolved oxygen levels suitable for fish (Wulschleger et al. 1990a); minimum sustained flows of ≥ 247 cfs were needed to preserve habitat quality (Wulschleger et al. 1990b). These flows also are needed to maintain the river channel substrate and create an appropriate distribution of vegetation within the river channel.

Water velocity appears to be a factor in the protection of fish and wildlife. Based on observations during the Pool B Demonstration Project, mean channel velocities that exceeded 1.6 feet per second (ft/s) (50 centimeters per second [cm/s]) caused fish to seek refuge or possibly migrate (Wulschleger et al. 1990b, Miller 1990). This value agrees with reports from other systems for two species that occur in the Kissimmee River. For the redbreast sunfish (*Lepomis auritus*), water velocities up to 1.1 ft/s (35 cm/s) are suitable for adults and juveniles, velocities up to 0.7 ft/s (20 cm/s) are suitable for fry and embryo stages, and velocities >1.1 ft/s (35 cm/s) reduce abundance (Aho et al. 1986). For the bluegill, adults prefer current velocities <0.3 ft/s (10 cm/s) but will tolerate up to 1.5 ft/s (45 cm/s) (Stuber et al. 1982a). For largemouth bass, optimal velocities are <0.19 ft/s (6 cm/s), and velocities >0.65 ft/s (20 cm/s) are unsuitable (Stuber et al. 1982b).

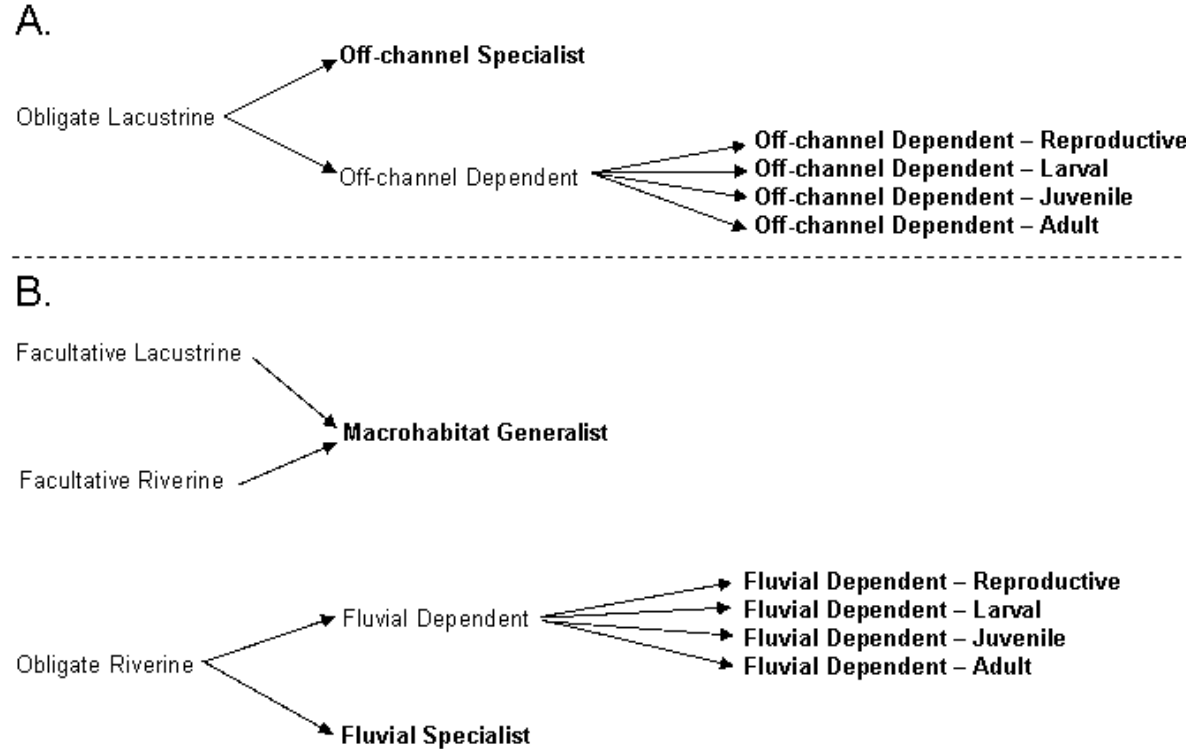


Figure 4-1. Schematic representation of modified macrohabitat guild structure (Derived from: Bain 1992).

(A) New guild categories based on dependence of associated taxa on off-channel habitat. The new Off-channel Dependent category includes species found in a variety of habitats but require access or use of off-channel habitats, or are limited to nonflowing, vegetated waters at some point in their life cycle. These species may have significant riverine populations during particular life history stages. The Off-channel Specialist category refers to species that usually are found only in off-channel habitats or species that are limited to non-flowing, vegetated habitats throughout life. Occasionally, individuals may be found in the river channel, but most information about these fish pertains to off-channel habitat.

(B) Original macrohabitat guild classification developed by Bain (1992).

4.2.2 Kissimmee River Birds

The Kissimmee River and associated floodplain historically served as important breeding and wintering grounds for large populations of wetland-dependent wading birds (Ciconiiformes), waterfowl (Anseriformes), shorebirds (Charadriiformes), marsh birds (Podicipadidae, Ardeidae, Rallidae, and Aramidae), and song birds (Passeriformes) (National Audubon Society 1936-1959, Florida Game and Fresh Water Fish Commission 1957, Weller 1995, Williams and Melvin 2005). Populations of many of these bird groups were negatively impacted by channelization, which substantially reduced the quantity and quality of marsh habitat by the early 1970s (Perrin et al. 1982, Toth 1993, Weller 1995). Pre- and post-channelization data indicated a 92% reduction in the mean number of waterfowl use days for all ducks (Anatinae) and American coots (*Fulica americana*) (Perrin et al. 1982). Prior to channelization, wading bird breeding colonies formed more regularly, were larger, and were not dominated by cattle egrets (*Bubulcus ibis*) (National Audubon Society 1936-1959). Post-channelization changes in hydrology, vegetation communities, and associated prey communities are believed to have contributed to the reduction of wading bird and waterfowl use of the river. This is supported by the latest Kissimmee River Restoration Evaluation Program monitoring data, which indicate the abundance of wading birds and waterfowl has increased over baseline (channelized) conditions since completion of Phase I restoration in 2001 (Cheek et al. 2014, Koebel et al. 2020). Completion of this phase resulted in periodic flooding of more than 5,792 acres (2,344 hectares) of former pasture and uplands as well as the partial return of historical hydrologic conditions and vegetation communities (Bousquin et al. 2007, 2009). Additionally, this likely produced a concomitant effect on prey populations of invertebrates and small fish (Koebel et al. 2020).

Wetland habitats of the Kissimmee River channel and floodplain now support at least 159 bird species, 66 of which are considered wetland-dependent during some portion of their life cycles (**Appendix F**, Table F-4). This number includes 12 state and 4 federally listed species. A total of 32 wetland-dependent species are breeding residents. The other 34 species depend on the Kissimmee River during some portion of their life cycle, particularly during migration and overwintering, while foraging, roosting, and seeking cover (**Appendix F**, Table F-5). Of the remaining 93 bird species, 68 are considered facultative and 25 opportunistic users of wetlands. Facultative users may nest, forage, and seek shelter in upland habitats, but preferentially use wetlands in most geographic areas or during particular times of the year (e.g., dry season). Opportunistic wetland users are species typically associated with uplands that may periodically take advantage of abundant food or habitat resources near water in certain locations along the Kissimmee River.

During aerial (helicopter) surveys, avian point counts, and other fieldwork, all wetland-associated bird species in **Appendix F**, Tables F-4 and F-5, have been documented using the floodplain in some capacity. The breeding status of each species along the river was derived from direct observations of nesting, presence during the breeding season, and the Florida Fish and Wildlife Conservation Commission (FWC) Breeding Bird Atlas, Distribution Maps by County (FWC 2003). If specific measurements of water depths were not provided in the literature (primarily from Poole [2008]), water depths were taken from direct observations made during point-count surveys or were estimated based on water depths associated with particular vegetation communities along the river. Habitat types were based on field observations made during point-count surveys or from descriptions in the literature that were translated to one of the three primary vegetation types found along the Kissimmee (Broadleaf Marsh, Wet Prairie, and Wet Shrub).

4.2.2.1 Habitat and Hydrologic Requirements of Wetland-Dependent Birds

The general hydrologic characteristics of foraging (mean water depth) and breeding (mean water depth under nest) habitat for wetland-dependent birds of the Kissimmee River are presented in **Appendix F**, Table F-5. Bird habitat along the Kissimmee River can be classified into four principal vegetation community types. The three dominant types of marsh vegetation are the Broadleaf Marsh, Wetland Shrub,

and Wet Prairie groups, described in **Appendix F**. The fourth is Wetland Forest, which is described in Carnal and Bousquin (2005). The plant, macroinvertebrate, fish, amphibian, reptile, bird, and small mammal communities associated with these habitats form the basis of the food web for wading birds, waterfowl, shorebirds, marsh birds, and songbirds. The distribution and structure of these habitats are a function of the timing, magnitude, and duration of the annual hydrologic cycle of flooding (typically June to November) and drying (usually December to May). As such, these functions work in tandem to dictate the location, timing, and success of foraging and reproduction along the river. Wading birds throughout South Florida, for example, are thought to cue the timing of breeding to the increased availability of prey during the dry season, when aquatic invertebrates and small fish become concentrated in isolated pools as water levels recede (Frederick and Collopy 1989a). Without this natural flood/drought cycle, which along the Kissimmee River causes water levels to fluctuate an average of 5.8 ft per year, vegetative community composition, structure, and function change and can negatively impact wetland-dependent bird populations (Toth 1993, Weller 1995). Reduced water levels can affect nest site selection and increase vulnerability to land-based predators (Frederick and Collopy 1989b).

Of the 32 bird species that depend on wetlands for successful reproduction, 9 primarily use herbaceous marsh (i.e., Broadleaf Marsh and Wet Prairie) as their principal nesting habitat, while 23 primarily depend on woody wetland vegetation (i.e., Wetland Shrub and Wetland Forest) to serve as nesting substrate (**Appendix F**, Table F-5). However, four wetland nesting species (bald eagle [*Haliaeetus leucocephalus*], boat-tailed grackle [*Quiscalus major*], mottled duck [*Anas fulvigula*], and osprey [*Pandion haliaetus*]) can nest in upland habitats as long as they are in close proximity to water (e.g., <2 km for bald eagles).

Wading bird nesting colonies along the river typically are found in woody shrubs and trees, either submerged or surrounded by water. This is typical of many wading bird colonies throughout the state that form as follows:

1. On islands (5 to 25 acres [2 to 10 hectares]) surrounded by at least 1.6 ft (0.5 m) of water during the January to July breeding season in Florida (Frederick and Collopy 1989b, White et al. 2005)
2. >164 ft (>50 m) from uplands, or the “mainland” if an island
3. >328 ft (>100 m) from human disturbance
4. Within 0.25 miles (0.4 km) of suitable vegetation with dead and live nesting materials
5. Within 6.2 miles (10 km) of suitable foraging habitat (White et al. 2005)

The Florida sandhill crane (*Grus canadensis pratensis*) typically nests in shallow (5.3 to 12.8 inches [13.5 to 32.6 cm] deep) herbaceous wetlands composed of Broadleaf Marsh and Wet Prairie vegetation types (Stys 1997). Nesting sites may shift to more permanent waterbodies (e.g., lakes) when ephemeral wetlands dry too early in the nesting season or during longer-term drought conditions.

Two waterfowl species that consistently nest along the Kissimmee River are mottled ducks and wood ducks (*Aix sponsa*). Mottled ducks were reported to nest on the ground in hayfields, grazed pasture, and natural upland prairie habitat, averaging a distance of 453 ft (138 m) from water. Wood ducks are tree nesters that prefer mature forests with suitable cavity trees over or near water (<1.2 miles [<2 km]) (Poole 2008).

In addition to nesting habitat requirements, many species require contrasting habitat types to forage and provide food for their young. Of the 32 wetland obligates, 20 species will forage in all 4 vegetation communities in addition to open-water habitat; 5 species specialize in Broadleaf Marsh and/or Wet Prairie; 1 species specializes in Wetland Forest and/or Wetland Shrub; 3 species forage primarily in open water near Wetland Forest and Wetland Shrub; and 3 species forage in a mixture of habitats (**Appendix F**, Table F-5). Preferred habitats of the facultative and opportunistic species can be found in **Appendix F**.

1035 Additional information about stage recession rates is available for wading birds in the Everglades based on
1036 long-term monitoring of nesting effort and water levels (Tarboton et al. 2004).

1037 Snail kites (*Rostrhamus sociabilis*) build nests in flooded vegetation of either woody (e.g., willow
1038 [*Salix* spp.], buttonbush [*Cephalanthus occidentalis*], cypress [*Taxodium* spp.]) or non-woody (e.g., cattail
1039 [*Typha* spp.], bulrush [*Scirpus* spp.]) plant species (Snyder et al. 1989). Nests typically are close,
1040 i.e., <164 ft (<500 meters [m]), to appropriate foraging habitat, >164 ft (>50 m) away from the shoreline,
1041 and submerged or surrounded by water >1.6 ft (>0.5 m) deep during the January to July nesting season to
1042 serve as an effective barrier against land-based predators (e.g., raccoons [*Procyon lotor*]) (Sykes et al.
1043 1995).

1044 Snail kites are almost entirely dependent on both native and exotic apple snails (*Pomacea* spp.) for survival;
1045 therefore, snail kite foraging habitat must provide the life history requirements of apple snails, while
1046 allowing for successful visual foraging by snail kites. Female apple snails deposit eggs on emergent
1047 substrates approximately 3.5 to 9.8 inches (9 to 25 cm) above the water surface during peak egg cluster
1048 production in Central Florida (April to May) (Turner 1996, Darby et al. 1999). Darby et al. (2008) found
1049 native apple snail recruitment could be reduced during seasonal drydowns by two possible mechanisms:
1050 1) reduced mating and egg-laying due to an early drydown before the peak egg-laying period, or
1051 2) decreased survival of juveniles too small to survive a late season drydown after hatching. However,
1052 drydowns occurring every 2 to 3 years are deemed important for maintaining emergent aquatic vegetation
1053 critical for egg-laying and aerial respiration (Darby et al. 2008).

1054 Although native apple snails in Florida are naturally adapted to water level fluctuations of 3 to 4 ft (0.9 to
1055 1.2 m) per year, they need to migrate to deeper water during recession events or aestivate in bottom
1056 sediments to avoid stranding and desiccation. Darby et al. (2002) found that when water receded to a depth
1057 of <4 inches (<10 cm), native apple snails ceased all movements and became stranded in dry marsh. Thus,
1058 prolonged low water levels in wetlands can significantly reduce snail kite access to apple snails due to apple
1059 snail mortality, matting down of emergent vegetation and subsequent reduction in visibility of apple snails
1060 from above, or declines in recruitment during the following season. Complete drying out of the vegetated
1061 littoral zone of lakes or wetlands can eliminate snail kite foraging habitat temporarily (e.g., up to 3 months
1062 during the dry season) or permanently (e.g., as the result of drainage or other human disturbance). The
1063 former is considered part of the natural hydrologic regime in Central Florida. Darby and Percival (2000)
1064 indicated 75% of adult apple snails survive this period of exposure to drydown conditions, while 50%
1065 survived up to 4 months. Conversely, high water can negatively impact apple snails and their eggs by
1066 drowning egg clusters during rapid ascension events and submerging emergent vegetation so that it is
1067 unavailable for oviposition. In general, any large changes in water level (e.g., ≥ 6 inches [≥ 15 cm] within
1068 2 to 3 weeks) during and after egg-laying can drown egg clusters during high water, cause adults to migrate
1069 out of the vegetated zone, or cause egg-laying vegetative substrate to collapse during rapid recession.

1070 The incursion of exotic island apple snails (*Pomacea maculata*) into the LKB has improved foraging
1071 conditions for snail kites on the Kissimmee River floodplain, as the exotic apple snail breeds nearly
1072 year-round (allowing snail kites to nest well into the wet season) and may be more tolerant of drought. Snail
1073 kite activity on the floodplain has greatly increased since arrival of the exotic apple snail, with nearly
1074 100 nests documented on the Kissimmee River floodplain in summer 2018, many of which successfully
1075 fledged young. However, as in lakes, nesting remains highly vulnerable to rapid changes in hydrology
1076 because rising water levels can inundate nests, while falling water levels can expose them to terrestrial
1077 predation. Foraging habitat for snail kites within the Kissimmee Basin includes shallow water (usually
1078 ≤ 4.3 ft [≤ 1.3 m]) that allows birds to forage effectively for native and exotic apple snails, their principal
1079 prey (Sykes et al. 1995). Snail kites fly low (5 to 33 ft [1.5 to 10 m]) over the water or still hunt from
1080 perches, while searching for apple snails within the top 6.3 inches (16 cm) of the water column (Sykes et al.
1081 1995).

Wading birds will forage in small ($<107 \text{ ft}^2$ [$<10 \text{ m}^2$]), and large (>0.25 acres [$>1,000 \text{ m}^2$]) habitat patches of all vegetation types, including open water, within wetlands and lake littoral zones. Wading birds usually forage within 3 to 12.5 miles (5 to 20 km) of a breeding colony site. As their collective name implies, wading birds forage by wading in shallow water (2 to 16 inches [5 to 40 cm]) that varies by the morphological characteristics of each species (especially leg length) (**Appendix F**, Table F-5). Although not part of the wading bird order Ciconiiformes, wading depths of the Florida sandhill crane (<12 inches [<30 cm]) also are limited by leg length (Stys 1997).

Fourteen species of ducks use the Kissimmee River, although only four species are resident breeders. Seven species are dabbling ducks that forage at or near the surface; four are diving ducks that forage much deeper under water. Dabbling duck foraging habitat along the Kissimmee River generally is shallow (2 to 12 inches [5 to 30 cm]) emergent wetlands with a vegetation:open water ratio between 30:70 and 70:30. Emergent vegetation should be interspersed among open-water areas, forming a mosaic of patches varying in size and shape. Dabbling duck habitat should be available year-round.

Diving duck foraging habitat along the Kissimmee River is typically 1 to 6 ft (30 to 180 cm) deep with at least half the area less than 4 ft (120 cm) in depth. Quality habitat usually has vegetation coverage of at least 40% submerged or floating-leaved vegetation and no more than 40% emergent vegetation. Typically, at least 30% of all vegetation within this habitat is composed of any combination of the following species: *Nymphaea odorata*, *Brasenia schreberi*, *Najas* spp., *Potamogeton* spp., *Vallisneria americana*, and *Hydrilla verticillata*. Submerged aquatic plant species need to reach the water surface for good habitat value. Diving duck habitat is needed from November 15 through March 15, when migrant diving ducks are most commonly found along the Kissimmee River.

4.2.4 KRRP and the Hydrologic Requirements of Fish and Wildlife

The importance of hydrologic characteristics (i.e., discharge, stage, depth, and velocity) as the key components of habitat in river-floodplain ecosystems is well-established in ecological literature (Poff et al. 1997, Arthington 2012). Thus, re-establishment of pre-channelization hydrologic characteristics is a cornerstone of the KRRP. Hydrologic characteristics necessary for the restoration of ecological integrity for fish and wildlife in the Kissimmee River were stated as five hydrologic criteria (**Box 1**) that have been used to guide the design of the restoration project (USACE 1991, Section 8.4.4, Restoration Criteria). These criteria are consistent with the hydrologic requirements for fish and wildlife as described earlier and in **Appendix F**.

The hydrologic criteria emphasize pre-channelization data and the importance of natural patterns of discharge and stage fluctuation in the river and floodplain, especially seasonal and annual variability. The natural pattern of rising and falling discharge with seasonal and annual variability has been termed the natural flow regime and is considered critical for the protection of fish and wildlife (Poff et al. 1997). In floodplain rivers like the Kissimmee River, flows that inundate portions of or all of the floodplain are termed a flood pulse. The resulting connectivity between the river channel and floodplain is a critical component of the habitat requirements of fish and wildlife populations (Junk et al. 1989).

The first hydrologic criterion emphasizes the importance of maintaining flow continuously through time with seasonal and annual variability of the pre-channelization system. This criterion reestablishes the natural flow regime for the Kissimmee River. The other four criteria ensure that as flow passes through the reconstructed river channel it produces desired outcomes for average velocity (second criterion) and floodplain inundation (third, fourth, and fifth criteria).

Box 1. Hydrologic Criteria for the Kissimmee River Restoration Project (From: USACE 1991).

Continuous flow with duration and variability characteristics comparable to the pre-channelization records – The most important features of this criterion are (a) reestablishment of continuous flow from July–October, (b) highest annual discharges in September–November and lowest flows in March–May, and (c) a wide range of stochastic discharge variability. These features should maintain favorable dissolved oxygen regimes during summer and fall months, provide non-disruptive flows for fish species during their spring reproductive period, and restore temporal and spatial aspects of river channel habitat heterogeneity.

Average flow velocities between 0.8 and 1.8 feet per second when flows are contained within channel banks – These velocities complement discharge criteria by protecting river biota from excessive flows, which could interfere with important biological functions (e.g., feeding and reproduction), and provide flows that will lead to maximum habitat availability.

A stage-discharge relationship that results in overbank flow along most of the floodplain when discharges exceed 1,400–2,000 cubic feet per second – This criterion reinforces velocity criteria and will reestablish important physical, chemical, and biological interactions between the river and floodplain.

Stage recession rates on the floodplain that typically do not exceed 1 foot per month – A slow stage recession rate is required to restore the diversity and functional utility of floodplain wetlands, foster sustained river/floodplain interactions, and maintain river water quality. Slow drainage is particularly important during biologically significant time periods, such as wading bird nesting months. Rapid recession rates (e.g., rates that will drain most of the floodplain in less than a week) have led to fish kills (i.e., during the Pool B Demonstration Project), and thus, are not conducive to ecosystem restoration.

Stage hydrographs that result in floodplain inundation frequencies comparable to pre-channelization hydroperiods, including seasonal and long-term variability characteristics – Ecologically, the most important features of stage criteria are water level fluctuations that lead to seasonal wet-dry cycles along the periphery of the floodplain, while the remainder of the (approximately 75%) of the floodplain is exposed to only intermittent drying periods that vary in timing, duration, and spatial extent.

A major component of the KRRP, the HRS is intended to help re-establish the natural flow regime from the Headwaters Revitalization Lakes to the Kissimmee River. The HRS will raise the regulation schedule for the Headwaters Revitalization Lakes so more water can be held in the lakes during periods of abundant rainfall and released at appropriate times to better mimic the natural pre-channelization flow regime than was allowed in the original design of the C&SF Project. The water held in this additional storage is essential for restoration of the natural flow regime.

A conceptual model is used to illustrate a single year of a discharge regime and the benefits to fish and wildlife associated with different portions of an annual flood pulse (**Figure 4-2**). The conceptual model begins with the peak of a flood pulse of sufficient magnitude to inundate the floodplain. Prior to channelization, peak flows could occur almost any time of year, depending on rainfall, but occurred most frequently at the end of the wet season or beginning of the dry season and continued well into the dry season (Anderson 2014a, Koebel et al. 2019). A flood pulse at that time of the year and extending well into dry season can provide floodplain habitat for foraging and reproduction by many fishes (especially the Off-channel Dependent Guild of fish), wading birds, waterfowl, and the endangered snail kite, which has begun nesting in the Kissimmee River floodplain.

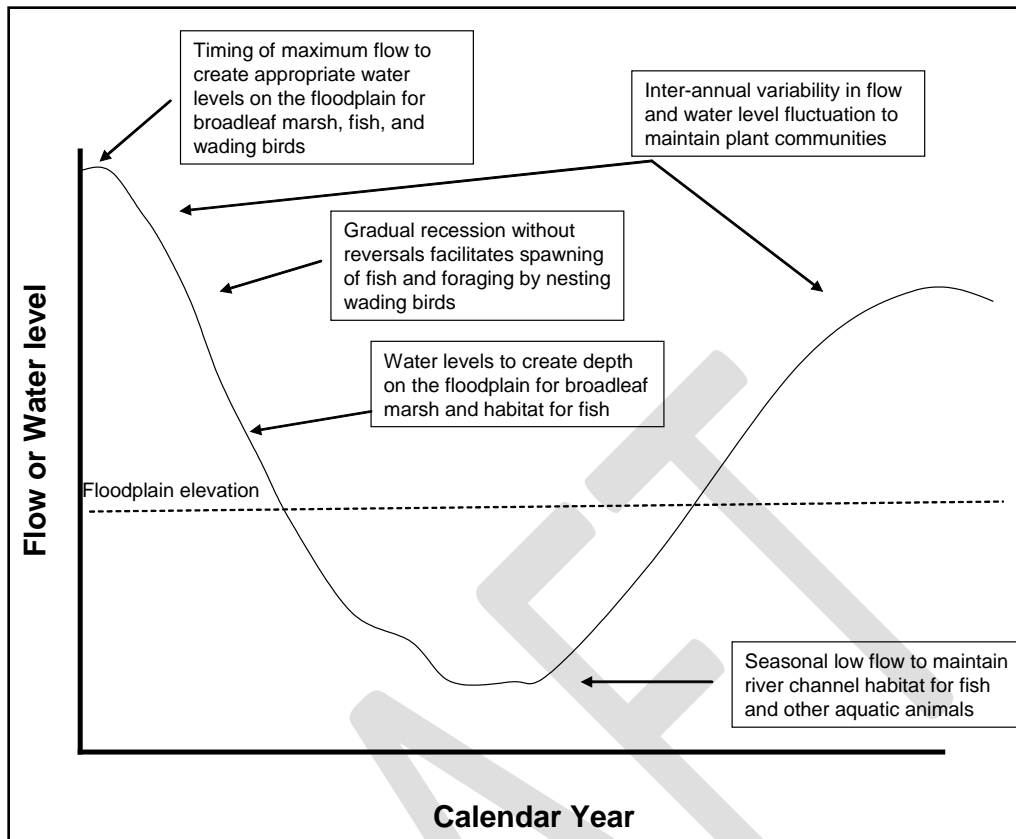


Figure 4-2. Relationship between fish/wildlife and flow or stage.

The peak of the flood pulse in the conceptual model is followed by a gradual recession extending the period of floodplain inundation and providing the appropriate water depth and duration at the frequency needed to maintain wetland plant communities. For example, Broadleaf Marsh, the predominant wetland vegetation group in the pre-channelization floodplain, requires hydroperiods with 1 ft of depth for 210 days in most years (Spencer and Bousquin 2014). Analysis of pre-channelization stage data shows that these conditions were met approximately two-thirds of years prior to channelization (Koebel et al. 2019). Extended periods of floodplain inundation with appropriate depth can protect nest sites and rookeries and also allow for the production of macroinvertebrates and small fish that are important prey species for wading birds and the endangered snail kite. Gradual recession rates also prevent trapping large numbers of fish and invertebrates on the floodplain and create favorable conditions for wading bird foraging. Large increases in flow during the gradual recession can disrupt spawning by fish and nesting by wading birds.

Gradual recession in the conceptual model ends with a transition to seasonal low flows. Such low flows should maintain sufficient depth to prevent crowding of fish and other aquatic animals. It also should have sufficient velocity to maintain habitat for fish and other aquatic animals by aerating the water and preventing accumulation of organic particles on the channel bed, which can benefit dissolved oxygen levels.

While the conceptual model does not explicitly address interannual variation, variability across years is important for long-term maintenance of habitat and persistence of fish and wildlife populations. River flow should vary from one year to the next as a result of rainfall variation and is necessary to maintain habitat characteristics, especially those of wetland plant communities and dependent fish and wildlife. For example, extreme high-water levels establish the upper elevation limit of wetland vegetation by limiting the growth of upland species; extreme low-water levels can create conditions that allow the seeds of some wetland plant species to germinate (Hill et al. 1998, Keddy and Fraser 2000).

4.3 Headwaters Revitalization Lakes and Upper Chain of Lakes Fish and Wildlife Resources

4.3.1 Fish and Wildlife Resources and Habitat

Wildlife considered during development of the Water Reservations include fish, amphibians and reptiles, birds, and mammals. The abundance of fish and wildlife is directly related to major wetland plant communities and their productivity, which form the foundation and structure of the fish and wildlife habitat associated with these waterbodies. The plant communities, in turn, are responsive to specific hydrology and generally are organized along shoreline depth gradients according to flooding tolerance. The KCOL and surrounding area support considerable fish and wildlife resources. The wildlife resources include a nationally recognized largemouth bass fishery, nesting colonies of the threatened wood stork (*Mycteria americana*) and endangered snail kite, and one of the largest concentrations of nesting bald eagles in the United States. Many of the same fish and wildlife species populate all seven of the KCOL reservation waterbodies due to the proximity of the lakes to each other and the canals that connect them.

4.3.1.1 Littoral Vegetation

Littoral vegetation is an important component of fish and wildlife habitat in lake ecosystems (e.g., Williams et al. 1985, Havens et al. 2005, Johnson et al. 2007). In lakes, vegetation is commonly distributed along an elevation gradient that corresponds to increasing light limitation with depth for submersed species and increasing hydroperiod for emergent species (Johnson et al. 2007). This section characterizes the vegetation communities present in each of the KCOL reservation waterbodies and the range of elevations where each occurs. Smaller lakes directly connected to the larger lakes are considered part of the reservation waterbody and are assumed to have similar ecological relationships with hydrology.

Plant communities associated with each of the KCOL reservation waterbodies have been classified from aerial imagery collected by the FWC between 2009 and 2016. The vegetation maps provide detailed estimates of the composition and distribution of flora in most of the reservation waterbodies. For descriptive purposes, the maps were reclassified into four major community types (**Table 4-1**) and overlaid onto approximate shoreline gradients of the reservation waterbodies. This summarizes years of mapping efforts to show how the distribution of littoral communities varies due to hydrologic variations between waterbodies.

Vegetation maps were developed using 2016 imagery for Lake Tohopekaliga and East Lake Tohopekaliga, while 2009 imagery was used for Lakes Hart-Mary Jane, Lakes Myrtle-Preston-Joel, the Alligator Chain of Lakes (represented by Alligator Lake), Lake Gentry, and two of the Headwaters Revitalization Lakes (Cypress and Hatchineha) (Mallison 2009, 2016). To determine elevation distributions for the four major community types (**Table 4-1**), vegetation maps were overlaid onto bathymetric maps developed from surveys in 2011 and 2012 and Osceola County's digital elevation model, which was derived from light detection and ranging (LiDAR) data collected by the United States Geological Survey in 2016. Bathymetric maps were used for lower elevations (a foot or more below maximum flood elevations) while the digital elevation model was used for the shallowest areas. There was no bathymetric map available for Lakes Kissimmee or Tiger, so only Cypress and Hatchineha were analyzed for Headwaters Revitalization Lakes vegetation patterns.

Table 4-1. Descriptions of the four major vegetation community types analyzed within the proposed reservation waterbodies for elevation distributions. Approximate hydroperiods are included for general reference.

Wetland Class	Description	Hydroperiod (days per year)
Shallow Marsh	Dominated by bunch grasses (<i>Axonopus furcatus</i> , <i>Spartina bakeri</i> , <i>Andropogon</i> spp., <i>Schizachyrium</i> spp., <i>Eragrostis</i> spp.), spikerushes (<i>Elocharis</i> spp.), beak rushes (<i>Rhynchospora</i> spp.), yellow-eyed grass (<i>Xyris ambigua</i>), smartweed (<i>Polygonum</i> spp.), American cupscale grass (<i>Sacciolepis striata</i>), and St. John's wort (<i>Hypericum</i> spp.)	0 to 365
Broadleaf Marsh	Includes pickerelweed and/or arrowhead (<i>Pontederia cordata</i> / <i>Sagittaria</i> spp.), and mixes of cattail (<i>Typha domingensis</i>)	300 to 365
Deepwater Grasses	Mixes or monocultures of maidencane (<i>Panicum hemitomon</i>), Egyptian paspalidium (<i>Paspalidium geminatum</i>), and bulrush (<i>Schoenoplectus californicus</i>) as well as mixes of cattail	365
Floating Leaf (Pads)	Mixes or monocultures of water lilies (<i>Nymphaea</i> spp.), spatterdock (<i>Nuphar advena</i>), and/or American lotus (<i>Nelumbo lutea</i>)	365

Elevation statistics were calculated for each vegetation polygon based on underlying elevation data. The interquartile ranges of those elevations were plotted by community type for each reservation waterbody, with respect to the elevations of the water regulation schedules (**Figure 4-3**). Historical stage data for each waterbody are described in **Section 4.3.2**. These evaluation methods demonstrate how hydrology varies between waterbodies, both in terms of elevation relative to their respective regulation schedules and their interannual variability.

The elevation distribution of community types varied by reservation waterbody because hydrology varies between the lake systems. However, conceptually, the community types occupied similar positions relative to the regulation schedules within each lake ecosystem. The upland edges of the littoral zones have shallow marshes (short-hydroperiod graminoid and herbaceous species), which also occur with various stands of wetland trees and shrubs (not classified here due to effects of shoreline development). At slightly lower elevations, under semi-permanent or permanent inundation but in relatively shallow water, Broadleaf Marsh vegetation like pickerelweed (*Pontederia cordata*) and arrowhead (*Sagittaria lancifolia*) is predominant. Under permanent inundation and in deeper water (i.e., water up to 6 ft [1.8 m] deep at full pool), floating leaf aquatics like water lilies (*Nymphaea* spp.) and spatterdock (*Nuphar advena*), and deepwater grasses like maidencane (*Panicum hemitomon*) and Egyptian paspalidium (*Paspalidium geminatum*) dominate.

Most of the lakes showed a similar pattern in terms of wetland class elevations, though a few distinctions were notable. Lake Tohopekaliga, for example, has had more extreme drawdowns for fisheries habitat management than any other waterbody in the KCOL, and the deepwater grasses community extended the farthest downslope as a result; more than 6 ft (1.8 m) lower in elevation than the regulation schedule maximum.

The upper elevation of the Broadleaf Marsh community was consistent across waterbodies, except for Lakes Hart-Mary Jane and Lake Gentry. For all other reservation waterbodies, the upper elevation of this wetland class coincided with the lower quartile (25th percentile) of the historical range of lake stages. The Broadleaf Marsh community may occur at deeper elevations in Lakes Hart-Mary Jane and Lake Gentry due to forested wetlands obscuring detection or competing at higher elevations (Lake Gentry), or if stable water levels have enabled floating mats of Broadleaf Marsh to develop farther downslope. Note that the interquartile range (a measure of water level variation) for Lakes Hart-Mary Jane is the narrowest among the reservation waterbodies, which tends to promote tussock formation.

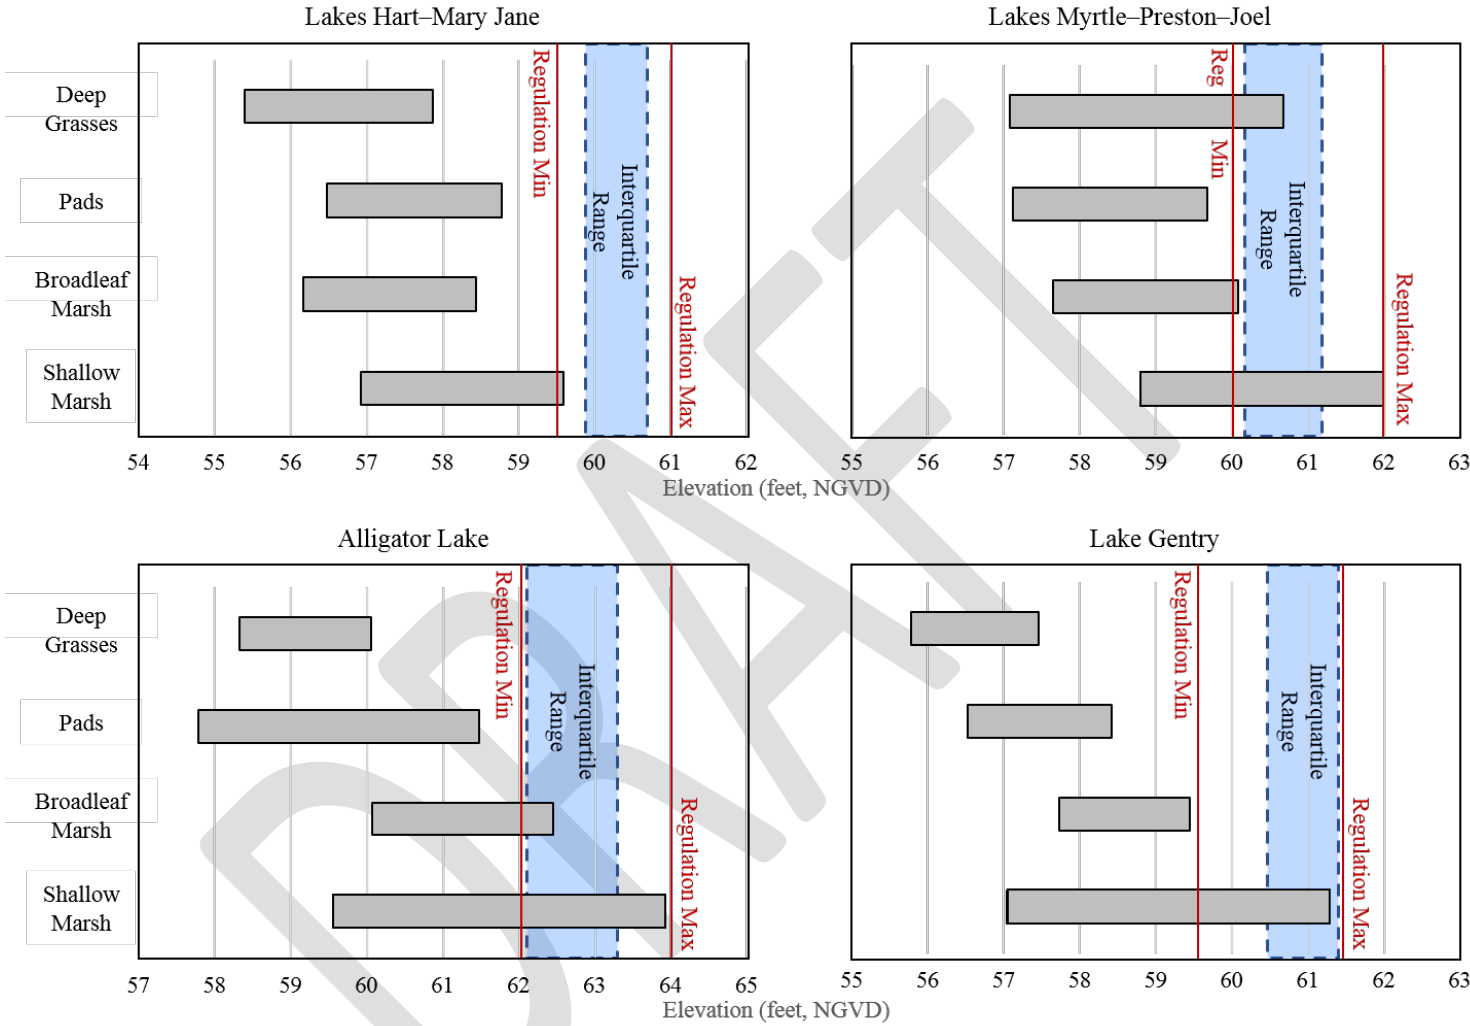


Figure 4-3. Approximate elevations of common vegetation community types for the proposed reservation waterbodies Lakes Hart-Mary Jane, Lakes Myrtle-Preston-Joel, Alligator Lake (representative of the Alligator Chain of Lakes), and Lake Gentry. Shaded gray bars represent the interquartile range of elevations for each community type, while the shaded blue box represents the interquartile range of the historical lake stages from Water Years 1972 to 2019. The minimum and maximum elevations of the regulation schedules are shown in red.

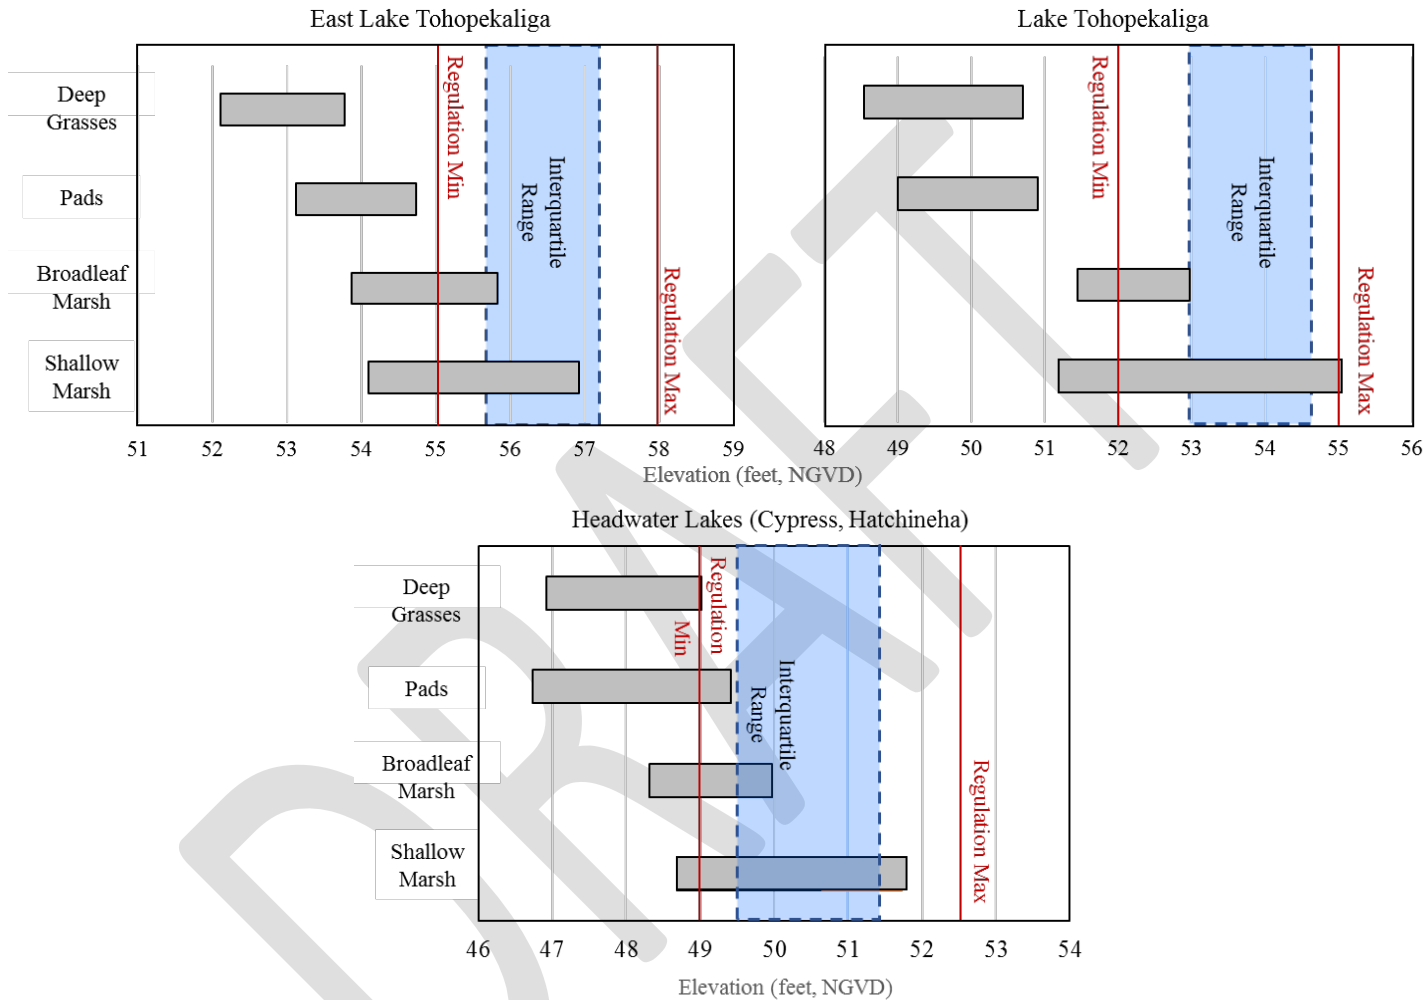


Figure 4-3 (cont.). Approximate elevations of common vegetation community types for the proposed reservation waterbodies East Lake Tohopekaliga, Lake Tohopekaliga, and the Headwaters Revitalization Lakes (Lakes Cypress and Hatchineha only; Lake Kissimmee bathymetry and Tiger Lake imagery/bathymetry were not available). Shaded gray bars represent the interquartile range of elevations for each community type, while the shaded blue box represents the interquartile range of the historical lake stages from Water Years 1972 to 2019. The minimum and maximum elevations of the regulation schedules are shown in red.

4.3.1.2 Fish and Wildlife

Fish are critical components of lake ecosystems, serving as links in the food chain between primary producers and higher consumers. Fish also provide a connection between the aquatic and terrestrial systems, serving as food for wading birds, ospreys, and bald eagles. Based on FWC sampling efforts in the 1980s (Moyer et al. 1987), the KCOL reservation waterbodies are home to at least 45 species of fish (**Table 4-2**). Four popular game fish species—black crappie (*Pomoxis nigromaculatus*), bluegill, largemouth bass, and redear sunfish—were collected in the six reservation waterbodies that were sampled. The littoral wetlands of the lakes are disproportionately important to the fishery, as these areas are the nurseries and prime locations of prey production in the waterbodies.

The KCOL fisheries are important economically as well as ecologically. The lakes are known worldwide for their prized sport fishing and support a robust recreation and tourism industry that is important to the local economy. In 2001, freshwater fishing in Florida generated an estimated economic impact of nearly \$2 billion (USFWS 2002). Because of the importance of their fisheries, the Headwaters Revitalization Lakes, Lake Tohopekaliga, and East Lake Tohopekaliga have been designated Fish Management Areas by the FWC, indicating the FWC is managing the freshwater fishery in cooperation with the local county (Osceola County).

Table 4-2. Fish species in six of seven proposed reservation waterbodies (Summarized from: Moyer et al. 1987).

Common Name	Species	Lakes Hart-Mary Jane	Headwaters Revitalization Lakes	East Lake Tohopekaliga	Lake Tohopekaliga	Alligator Chain of Lakes	Lake Gentry
Atlantic needlefish	<i>Strongylura marina</i>	X	X	X	X	X	X
Banded topminnow	<i>Fundulus auroguttatus</i>		X				
Black crappie	<i>Pomoxis nigromaculatus</i>	X	X	X	X	X	X
Blue tilapia	<i>Oreochromis aureus</i>		X	X	X		
Bluefin killifish	<i>Lucania goodei</i>	X	X	X	X	X	X
Bluegill	<i>Lepomis macrochirus</i>	X	X	X	X	X	X
Bluespotted sunfish	<i>Enneacanthus gloriosus</i>	X	X	X	X	X	X
Bowfin	<i>Amia calva</i>	X	X	X	X	X	X
Brook silverside	<i>Lebistes sicculus</i>	X	X	X	X	X	X
Brown bullhead	<i>Ameiurus nebulosus</i>	X	X	X	X	X	X
Brown hoplo	<i>Hoplosternum littorale</i>		X		X		
Chain pickerel	<i>Esox niger</i>	X	X	X	X	X	X
Channel catfish	<i>Ictalurus punctatus</i>	X	X	X	X	X	X
Coastal shiner	<i>Notropis petersoni</i>	X	X		X		
Dollar sunfish	<i>Lepomis marginatus</i>	X	X	X	X	X	X
Eastern mosquitofish	<i>Gambusia holbrooki</i>	X	X	X	X	X	X
Everglades pygmy sunfish	<i>Elassoma evergladei</i>	X	X	X	X	X	X
Flagfish	<i>Jordanella floridae</i>	X	X	X	X	X	X

Common Name	Species	Lakes Hart-Mary Jane	Headwaters Revitalization Lakes	East Lake Tohopekaliga	Lake Tohopekaliga	Alligator Chain of Lakes	Lake Gentry
Florida gar	<i>Lepisosteus platyrhincus</i>	X	X	X	X	X	X
Gizzard shad	<i>Dorosoma cepedianum</i>	X	X	X	X	X	X
Golden shiner	<i>Notemigonus crysoleucas</i>	X	X	X	X	X	X
Golden topminnow	<i>Fundulus chrysotus</i>	X	X	X	X	X	X
Inland silverside	<i>Menidia beryllina</i>		X	X			
Lake chubsucker	<i>Erimyzon sucetta</i>	X	X	X	X	X	X
Largemouth bass	<i>Micropterus salmoides</i>	X	X	X	X	X	X
Least killifish	<i>Heterandria formosa</i>	X	X	X	X	X	X
Longnose gar	<i>Lepisosteus osseus</i>	X	X	X	X	X	X
Okefenokee pygmy sunfish	<i>Elassoma okefenokoee</i>		X				
Pirate Perch	<i>Aphredoderus sayanus</i>	X	X	X	X	X	
Pugnose minnow	<i>Opsopoeodus emiliae</i>		X	X	X	X	X
Pygmy killifish	<i>Leptolucania ommata</i>	X				X	
Redear sunfish	<i>Lepomis microlophus</i>	X	X	X	X	X	X
Redfin pickerel	<i>Esox americanus americanus</i>	X		X		X	X
Sailfin catfish	<i>Pterygoplichthys disjunctus</i>		X				
Sailfin molly	<i>Poecilia latipinna</i>		X	X	X	X	X
Seminole killifish	<i>Fundulus seminolis</i>		X	X	X	X	X
Spotted sunfish	<i>Lepomis punctatus</i>	X	X	X	X	X	
Starhead topminnow	<i>Fundulus notti</i>	X		X		X	X
Swamp darter	<i>Etheostoma fusiforme</i>	X	X	X	X	X	X
Tadpole madtom	<i>Noturus gyrinus</i>		X		X	X	X
Tailight shiner	<i>Notropis maculatus</i>		X	X	X	X	X
Threadfin shad	<i>Dorosoma petenense</i>		X	X	X	X	
Warmouth	<i>Lepomis gulosus</i>	X	X	X	X	X	X
White catfish	<i>Ameiurus catus</i>	X	X		X		X
Yellow bullhead	<i>Ameiurus natalis</i>	X	X	X	X	X	X
Total Number of Species		33	42	37	38	37	34

1268

1269 Amphibians and reptiles (herpetofauna) are common but mostly inconspicuous inhabitants of lakes, ponds,
 1270 streams, wet prairies, marshes and other aquatic habitats of Central Florida. While not extensively
 1271 monitored in the KCOL reservation waterbodies, amphibians and reptiles likely occur throughout the
 1272 waterbodies, especially in association with littoral wetland vegetation. A list of amphibian and reptile
 1273 species likely to occur in the KCOL (**Table 4-3**) was compiled from regional distribution maps (Tennant

1997, Bartlett and Bartlett 1999) and a study of amphibian and reptile use of littoral wetlands on Lake Tohopekaliga (Muench 2004). The listed amphibians include frogs (seven species), one toad species, and six species of salamander. The reptiles include the American alligator (*Alligator mississippiensis*), eight species of turtles, and ten species of snakes. The American alligator is an economically important species and is federally listed as a threatened species (FWC 2013). Recreational harvesting of alligators is allowed with a permit in all the reservation waterbodies with public access, and the larger waterbodies support commercial harvesting of eggs. Lakes Kissimmee, Tohopekaliga, and Hatchineha have the largest alligator populations in the KCOL (Koebel et al. 2016).

Table 4-3. Aquatic amphibians and reptiles likely to occur in the Kissimmee Chain of Lakes. Taxa in bold are known to occur in the littoral zone of Lake Tohopekaliga (From: Muench 2004).

Common Name	Species
Amphibians	
Florida cricket frog	<i>Acris gryllus dorsalis</i>
Green tree frog	<i>Hyla cinerea</i>
Florida chorus frog	<i>Pseudacris nigrita verrucosa</i>
Little grass frog	<i>Pseudacris ocularis</i>
Eastern narrow-mouthed toad	<i>Gastrophryne carolinensis</i>
Bullfrog	<i>Rana catesbeina</i>
Pig frog	<i>Rana grylio</i>
Southern leopard frog	<i>Rana sphenoccephala utricularia</i>
Two-toed amphiuma	<i>Amphiuma means</i>
Dwarf salamander	<i>Eurycea quadridigitata</i>
Peninsular newt	<i>Notophthalmus viridescens piaropicola</i>
Narrow-striped dwarf siren	<i>Pseudobranchius axanthus axanthus</i>
Eastern lesser siren	<i>Siren intermedia intermedia</i>
Greater siren	<i>Siren lacertina</i>
Reptiles	
American alligator	<i>Alligator mississippiensis</i>
Florida snapping turtle	<i>Chelydra serpentine osceola</i>
Florida chicken turtle	<i>Deirochelys reticularia chrysea</i>
Peninsular cooter	<i>Pseudemys floridana peninsularis</i>
Florida red-bellied turtle	<i>Pseudemys nelsoni</i>
Striped mud turtle	<i>Kinosternon baurii</i>
Florida mud turtle	<i>Kinosternon subrubrum steindachneri</i>
Common musk turtle	<i>Sternothernus odoratus</i>
Florida softshelled turtle	<i>Trionyx ferox</i>
Eastern garter snake	<i>Thamnophis sirtalis sirtalis</i>
Peninsula ribbon snake	<i>Thamnophis sauritus sackenii</i>
Florida water snake	<i>Nerodia fasciata pictiventris</i>
Florida green water snake	<i>Nerodia floridana</i>
Brown water snake	<i>Nerodia taxispilota</i>
Striped crayfish snake	<i>Regina alleni</i>
Eastern mud snake	<i>Farancia abacura abacura</i>
North Florida swamp snake	<i>Seminatrix pygaea pygaea</i>
Florida kingsnake	<i>Lampropeltis getula floridana</i>
Florida cottonmouth	<i>Agkistrodon piscivorus conanti</i>

1285 Many birds are associated with lakes in Central Florida (e.g., Hoyer and Canfield 1990, 1994) and use these
1286 waterbodies for foraging, roosting, and reproduction. Audubon of Florida's list of Important Bird Areas
1287 includes three lakes within the KCOL: Lakes Kissimmee, Tohopekaliga, and Mary Jane (Pranty 2002). The
1288 Important Bird Area designation indicates that a site supports significant populations or diversity of native
1289 birds. An indication of the number of bird species using the KCOL reservation waterbodies can be obtained
1290 from Florida's Breeding Bird Atlas (FWC 2003), which was used to compile a list for lakes in Orange,
1291 Osceola, and Polk counties (**Table 4-4**). This list contains 43 bird species, and 29 of them were recorded in
1292 all 3 counties.

1293 The snail kite is an endangered raptor whose distribution in the United States is restricted to Central and
1294 South Florida. Primary critical habitat for snail kites is listed as portions of the Everglades and Lake
1295 Okeechobee (USFWS 1999), though the KCOL region has become critically important to the population
1296 since 2005 (Cattau et al. 2012). During regional drought years when typical southern, palustrine habitats
1297 dry out, lacustrine habitats in the northern portion of the range play a crucial role in sustaining the
1298 population. The three primary waterbodies in the KCOL that snail kites use are East Lake Tohopekaliga,
1299 Lake Tohopekaliga, and Lake Kissimmee. However, snail kites recently began using portions of the
1300 restored Kissimmee River floodplain heavily during the non-breeding season, though some nesting has
1301 occurred there as well.

1302 The Florida sandhill crane is listed as a threatened species by the State of Florida (FWC 2013). Its threatened
1303 status is based on low numbers due to a low reproductive rate, specialized habitat requirements, and loss of
1304 habitat due to humans (Williams 1978). Sandhill cranes occur throughout the KCOL and are included on
1305 the species lists in Three Lakes Wildlife Management Area and Lake Kissimmee State Park. While sandhill
1306 cranes typically nest in isolated wetlands, there are increasing reports of this species using urbanized and
1307 other developed areas (Toland 1999). Sandhill cranes nest in the marsh community on several of the KCOL
1308 reservation waterbodies, including Lakes Hart-Mary Jane, East Lake Tohopekaliga, Lake Tohopekaliga,
1309 and the Headwaters Revitalization Lakes (Welch 2004). Sandhill cranes likely are using the same habitat
1310 in other reservation waterbodies, although the extent of probable use is unknown.

1311 The bald eagle population has been recovering throughout the United States since it was first listed as
1312 endangered in 1978. Its status was changed in 1995 to threatened, and it was delisted in 2007. Osceola and
1313 Polk counties have the highest number of bald eagle territories (225 total) in the state (FWC 2008). While
1314 not all of these territories are near the reservation waterbodies, 2007 nesting data had nests within a 2-km
1315 buffer of six reservation waterbodies. Only Lakes Myrtle-Preston-Joel had no nests reported, which could
1316 be due to a lack of access and recreational use of those lakes.

1317 Four species of mammals in the region—marsh rice rat (*Oryzomys palustris*), marsh rabbit (*Sylvilagus*
1318 *palustris*), round-tailed muskrat (*Neofiber alleni*), and river otter (*Lutra Canadensis*)—are known to use
1319 wetland habitat within the KCOL (Florida Department of Environmental Protection 1998). In addition,
1320 several other species of mammals were observed using spoil islands created in the littoral zone of Lake
1321 Jackson, a contributing waterbody, including white-tailed deer (*Odocoileus virginianus*), wild pig (*Sus*
1322 *scrofa*), gray fox (*Urocyon cinereoargenteus*), raccoon, and bobcat (*Felis rufus*) (Hulon et al. 1998). The
1323 extent to which these mammals use the littoral zones of the above lakes likely depends on the quality and
1324 quantity of upland habitat along the shores.

1325 Table 4-4. Breeding birds associated with proposed lake reservation waterbodies (Summarized
1326 from: FWC 2003).

Common Name	County		
	Orange	Osceola	Polk
American coot	X	X	X
Bald eagle	X	X	X
Belted kingfisher			X
Black rail	X		
Black swan	X		X
Black-bellied whistling-duck			X
Black-crowned night heron	X	X	X
Black-necked stilt	X	X	X
Blue-winged teal	X		
Common moorhen	X	X	X
Double-crested cormorant	X	X	X
Fulvous whistling-duck	X	X	
Glossy ibis			X
Great blue heron	X	X	X
Great egret	X	X	X
Green heron	X	X	X
Gull-billed tern			X
Killdeer	X	X	X
King rail	X	X	X
Least bittern	X	X	X
Least tern	X		X
Limpkin	X	X	X
Little blue heron	X	X	X
Louisiana waterthrush	X		
Mallard	X	X	X
Mottled duck	X	X	X
Muscovy duck	X	X	X
Mute swan			X
Osprey	X	X	X
Pied-billed grebe	X	X	X
Purple gallinule	X	X	X
Red-winged blackbird	X	X	X
Ruddy duck			X
Sandhill crane	X	X	X
Short-tailed hawk	X	X	X
Snail kite		X	X
Snowy egret	X	X	X
Swallow-tailed kite	X	X	X
Tricolored heron	X	X	X
White ibis	X	X	X
Wood duck	X	X	X
Wood stork	X	X	X
Yellow-crowned night heron			X
Total	35	31	39

1327

4.3.2 Hydrologic Characteristics

Major hydrological changes in the KCOL began in the 1880s when extensive canals were dredged to create a navigable route from Fort Myers to the town of Kissimmee, including the Kissimmee River and Chain of Lakes. Lake stages fell significantly and tens of thousands of acres of surrounding wetlands were drained. Between 1962 and 1969, the USACE implemented the C&SF Project for flood control, water supply, and environmental protection. Water control structures were built at the outlet of each waterbody and these lakes currently are operated using water control manuals and regulation schedules. These operations narrowed the range of water level fluctuation in the lakes by not allowing stages to rise as high or to fall as low as they had before regulation (**Figure 4-4**). Elimination of the higher water levels reduced the amount of wetland habitat for fish and wildlife. For example, an estimated 5,600 acres (2,266 hectares) of habitat for waterfowl were lost due to regulation of water levels in Lakes Kissimmee, Cypress, Hatchineha, and Tohopekaliga (Perrin et al. 1982).

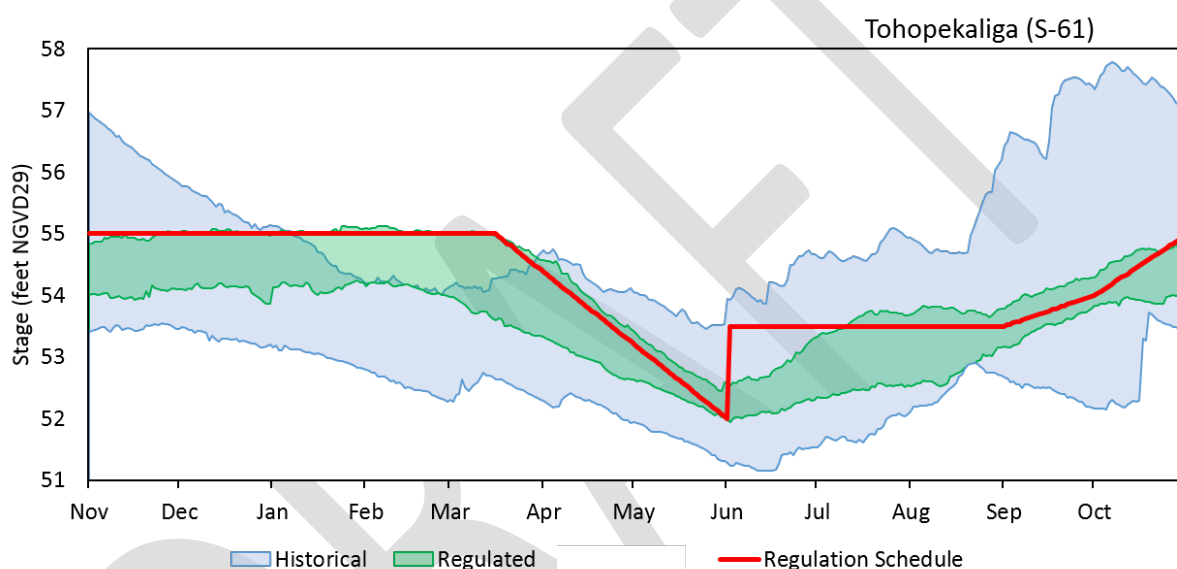


Figure 4-4. The interquartile ranges (25th to 75th percentiles) of daily lake stages before (blue, 1942 to 1962) and with (green, 1964 to 2019) regulation for Lake Tohopekaliga. The current regulation schedule is overlaid in red.

Compared to the major changes associated with adoption of regulation schedules, there have been relatively small adjustments to the schedules since they were first implemented. These changes include permanently shifting the range of water levels down 0.5 ft in Lake Gentry, raising the highest elevation 1 ft and lowering the minimum elevation 0.5 ft in East Lake Tohopekaliga and Lake Tohopekaliga, and raising the minimum elevation 0.5 ft in Lakes Hart and Mary Jane. Most of these schedule changes were made in 1975. In addition to changes in the minimum and maximum elevations in the schedules, minor changes in the shape (seasonality) of the schedule lines also have occurred. The current schedules have been in use since the early 1980s, but the general highs, lows, and seasonality of the schedules have remained relatively unchanged since the 1970s.

While the seasonality and shape of the regulation schedules are very similar among most of the reservation waterbodies (except Lakes Myrtle-Preston-Joel, which recedes from a maximum in December instead of March), the actual historical hydrologic patterns during the regulated period vary considerably among the systems. A review of historical stages from May 1971 through April 2019 (Water Years 1972 through 2019) for each waterbody showed the difference between median daily values and corresponding regulation

schedules varies by season and by system (**Figure 4-5**). For example, median daily stages in East Lake Tohopekaliga and the Alligator Chain of Lakes often were approximately 0.75 ft below the regulation schedules during portions of the dry season (November to May), while Lakes Myrtle-Preston-Joel and Lake Gentry had less than 0.25 ft difference. These hydrologic differences affect the distribution and composition of littoral communities along lakeshore gradients (Keddy 2000, Wilcox and Nichols 2008) and the fish and wildlife associated with each. Drier lakes (relative to their regulation schedules), such as the Alligator Chain of Lakes and East Lake Tohopekaliga, likely have shorter-hydroperiod vegetation communities farther downslope from the maximum flood elevation, whereas Lake Gentry may have relatively long-hydroperiod communities farther upslope.

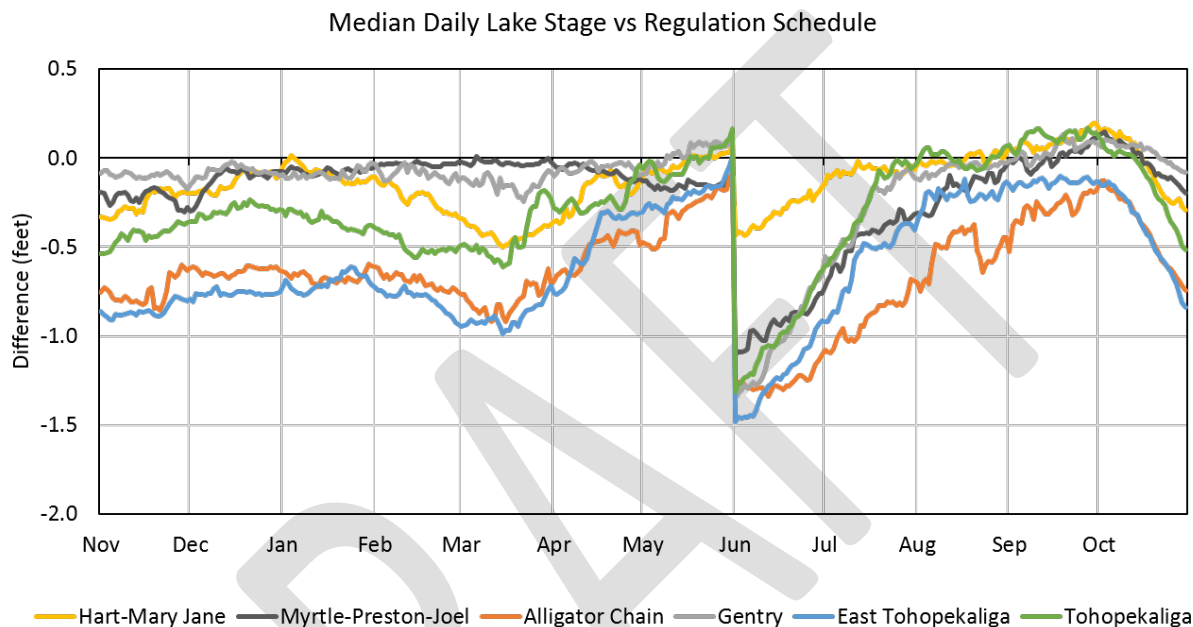


Figure 4-5. The difference between median daily lake stages (May 1972 to April 2019) and each reservation waterbody's current regulation schedule. Negative values indicate median stages are lower than the regulation schedule at that time of year.

The Headwaters Revitalization Lakes were subject to the same effects from water control structures and subsequent regulation schedules but have undergone more recent operational changes. **Section 4.1** discusses regulation of the Headwaters Revitalization Lakes (S-65) under an interim regulation schedule, which was implemented after the first phase of construction for the KRRP was completed in 2001. The HRS will be implemented when KRRP construction is completed.

4.3.3 Linkages Between Hydrology and Biology

Fish and wildlife in the reservation waterbodies have been linked to seasonal and annual patterns of water level fluctuation that support wetland plant communities (USFWS 1958, Williams et al. 1985, Johnson et al. 2007). These vegetation zones are important locations for food production. Parts of plants, such as seeds and tubers, can be consumed directly. Plants also provide attachment sites for algae and invertebrates, which are eaten by various species of fish and wildlife. Additionally, plants provide shelter from predators and serve as nesting sites for many species.

1383 Fluctuating water levels are one of the most important factors that determine the type, abundance, and
1384 distribution of vegetation in lake littoral zones (Hill et al. 1998, Keddy 2000, Keddy and Fraser 2000).
1385 These fluctuations are important on seasonal, annual, and interannual scales. For example, infrequent,
1386 extreme low water levels allow organic components of exposed sediments to decompose more rapidly
1387 (Cooke et al. 1993) and allow the seeds of some wetland plants to germinate (Hill et al. 1998, Keddy and
1388 Fraser 2000). Extreme low water levels also are an important determinant of the lower limit of emergent
1389 vegetation in the KCOL reservation waterbodies (Holcomb and Wegener 1972).

1390 In the KCOL, habitat use by fish and wildlife is linked to seasonal and annual patterns of water level
1391 fluctuation. This is due, in part, to how hydrology determines zonation of wetland plant communities, which
1392 in turn provide food, shelter, and breeding habitat for various faunal communities. Seasonal elevation of
1393 water level also gives fish access to littoral marsh and other vegetated areas where they spawn. During wet
1394 years, higher lake stages in the spring increase the percentage of the littoral zone that remains flooded,
1395 thereby increasing the availability of foraging and breeding habitat for fish and other aquatic fauna.

1396 Fluctuating water levels are needed to create appropriate inundation patterns (hydroperiods) to maintain the
1397 wetland plant communities that provide shelter, serve as spawning locations, and provide refuge for prey.
1398 In the KCOL reservation waterbodies, fish use Broadleaf Marsh, Floating Leaf, Deepwater Grasses, and
1399 even the Shallow Marsh community when lake stages are sufficiently high. These plant communities are
1400 distributed along water depth gradients, and lake stage affects the quantity and quality of available habitats.
1401 High water levels during the spawning season, for example, provide fish access to shallower, sandy areas
1402 with more vegetative cover for eggs and fry.

1403 Fish are completely dependent on the hydrologic patterns that inundate habitats, provide oxygen, and shape
1404 the composition and distribution of vegetation on the lakes. Current regulation schedules for the reservation
1405 waterbodies approximate some aspects of natural lake hydrology (e.g., seasonal high at the end of the wet
1406 season and a seasonal low at the end of the dry season), albeit with artificial durations. Most regulation
1407 schedules permit maximum water levels throughout the winter and early spring. Although such stable, high
1408 lake stages would be somewhat unnatural throughout the first portion of the dry season, they do allow fish
1409 seasonal access to upper lake elevations for breeding and recruitment, which is important given most of the
1410 lakes are reduced in size from their historical condition. Seasonally low water levels are beneficial for
1411 predators because littoral shelter becomes limited and forage fish are concentrated. This is especially true
1412 for adult largemouth bass that wait at the fringes of littoral vegetation to ambush prey.

1413 Most of the amphibians and reptiles likely to be associated with the KCOL reservation waterbodies prefer
1414 vegetated (often dense), shallow littoral zones of lakes and are likely to be associated with the Shallow
1415 Marsh, Broadleaf Marsh, and Floating Leaf plant communities of these lakes. A hydrologic regime that
1416 offers protection of these three plant communities likely will provide protection for most amphibians and
1417 reptiles. Decreasing hydroperiods or eliminating littoral zone habitats by artificially reducing lake stages
1418 would adversely impact amphibian and reptile communities of these lakes.

1419 Of the amphibians and reptiles, the feeding and nesting hydrologic requirements are best understood for the
1420 American alligator. Alligators are opportunistic and feed on a variety of prey (Newsom et al. 1987). In
1421 north-central Florida, alligators feed on fish, reptiles, amphibians, birds, mammals (e.g., round-tailed
1422 muskrat), and invertebrates (e.g., crayfish, freshwater snails) (Delany and Abercrombie 1986). Juvenile
1423 alligators consume more invertebrate prey than do adults (Delany and Abercrombie 1986, Delany 1990).
1424 Nesting in the KCOL is associated with the Broadleaf Marsh vegetation community. Alligators push
1425 together soil and vegetation to build dome-shaped nesting mounds, often near permanent water. When
1426 constructing nests, alligators show no preference for sites or specific plant species (Goodwin and Marion
1427 1978) but need dense marsh vegetation for nesting material.

1428 Alligators require a hydrologic regime that maintains marsh habitat and provides inundation during the
1429 nesting season, and extreme high or low water levels can reduce the availability of nesting sites (Johnson
1430 et al. 2007). Nesting generally occurs from mid-June to mid-September, and it is important that water levels
1431 are high enough during this period to inundate the marsh community so female alligators can construct
1432 nests that will be protected from raccoons and other terrestrial predators (Goodwin and Marion 1978,
1433 Newsom et al. 1987, Johnson et al. 2007). It also is important that water levels do not rise so rapidly that
1434 nests and eggs are flooded, which might occur after several days of heavy rainfall (Goodwin and Marion
1435 1978).

1436 Extreme water levels can affect alligator survival. Hatchlings use dense marsh habitats to avoid predators
1437 and lower water levels may force them into deeper, less protected areas of the marsh (Woodward et al.
1438 1987). Low water levels can also cause heat stress and concentrate alligator populations, making them more
1439 vulnerable to cannibalism, disease, and prey limitations (Woodward et al. 1987).

1440 There are specific hydrologic requirements for wading birds and their colonies, and for imperiled avian
1441 species in the region. Wading bird colonies depend on water depths in wetland and marsh communities that
1442 are shallow enough for foraging, deep enough for protection of nests, and support marsh plant communities
1443 long term. Water depths should be at least 1.6 ft (0.5 m) deep around nesting colonies throughout most of
1444 the nesting season to reduce terrestrial predator access (Frederick and Collopy 1989b, White et al. 2005).
1445 Water levels also must be shallow enough that individuals can hunt for prey and should gradually recede
1446 throughout the dry season to concentrate prey.

1447 The hydrologic requirements of snail kites relate to the availability of suitable nesting habitat and their
1448 principal prey, apple snails. Snail kites nest in low vegetation over water and are susceptible to failure if
1449 water levels recede or ascend too quickly during the breeding season, especially during the peak months
1450 from March to June. Additionally, water levels that begin receding too early in the breeding season (prior
1451 to January) may reduce the amount of inundated breeding and foraging habitat available during peak nesting
1452 periods. Therefore, providing adequate snail kite habitat during the dry season in the KCOL requires
1453 balancing high enough water levels to maximize inundated habitat while still allowing for moderate
1454 recession rates until June.

1455 Snail kites require sufficient water levels during the nesting season to provide a barrier to terrestrial
1456 predators around their nests. A depth of 1 ft (0.3 m) at the beginning of nesting with a slow recession rate
1457 is the minimum depth needed to protect nests (Sykes et al. 1995) but will vary depending on distance to
1458 shore or density of vegetation between the nest and shore.

1459 The Florida apple snail (*Pomacea paludosa*), which was the primary prey source of snail kites before the
1460 proliferation of the exotic apple snail (*Pomacea maculata*), also has specific hydrologic requirements. This
1461 species has a life span of a little more than 1 year. Populations of apple snails depend on strong recruitment
1462 from eggs laid above water on emergent vegetation or other appropriate substrates. While eggs can be laid
1463 from February to November, the peak egg-laying period is April to May, when water levels are declining
1464 (Darby et al. 2008). Rapidly declining water levels can leave newly hatched apple snails exposed to
1465 desiccation. Apple snails occur in association with emergent vegetation found in the Shallow Marsh,
1466 Broadleaf Marsh, and Deepwater Grasses plant communities. Apple snails have poor dispersal ability and
1467 are susceptible to desiccation when surface water disappears. Therefore, water levels that completely drain
1468 these communities can cause mortality of apple snails.

1469 The hydrologic requirements of sandhill cranes relate primarily to nesting requirements. Nests are
1470 constructed in emergent marshes. Nest initiation can begin as early as December, but usually does not begin
1471 until January and can extend through August (Stys 1997). In south-central Florida, average laying dates are
1472 from February 22 to 24 (Walkinshaw 1982); the mean laying date is March 3 (Tacha et al. 1992). The

1473 average water depth at sandhill crane nests was 0.97 ft (29.6 cm) at the beginning of nesting season in
1474 Central Florida (Walkinshaw 1982). Most production of sandhill cranes in Osceola County (Three Lakes
1475 Wildlife Management Area) occurred in years with average or above average water levels during the nesting
1476 and post-nesting season (Bennett 1992).

1477 The hydrologic requirements of bald eagles include nesting and foraging habitat. Throughout Florida, most
1478 bald eagle nests are in pine trees (*Pinus palustris* and *Pinus elliottii*) (FWC 2008), but in the KCOL, they
1479 are primarily located in oaks (*Quercus* spp.) and cypress (*Taxodium* spp.). The lakes are much more
1480 important for foraging habitat than nesting habitat. Bald eagle nests typically are within 1.25 miles (2 km)
1481 of waterbodies with suitable foraging habitats (Buehler 2000). In north-central Florida, bald eagles feed
1482 predominantly on fish, waterfowl, mammals, and reptiles (McEwan and Hirth 1980). During the nesting
1483 season, bald eagles prefer large fish (13.4 to 15 inches [34 to 38 cm]) (Buehler 2000). Fish that forage near
1484 the surface or that occur in shallow water near shore often are taken by bald eagles. A hydrologic regime
1485 that supports prey populations is critical to meet the needs of bald eagles.

CHAPTER 5: METHODS AND ANALYSES USED TO IDENTIFY RESERVED WATER

5.1 Introduction

This section summarizes the approaches taken to identify the water that should be reserved from allocation to protect fish and wildlife in each of the proposed reservation waterbodies. The standards on which Water Reservation rules are based [Section 373.223(4), F.S.] afford the SFWMD Governing Board considerable discretion and judgment in determining the quantities and timing of waters that may be reserved from use for the protection of fish and wildlife or public health and safety. The identification of water proposed for reservation is first discussed for the Kissimmee River and Headwaters Revitalization Lakes reservation waterbodies, followed by the UCOL waterbodies.

5.2 Rationale for Reserving All Surface Water Kissimmee River and Headwaters Revitalization Lakes

The KRRP was developed to address public concerns about the effects of the C&SF Project on the Kissimmee River, specifically that loss of flow and floodplain inundation in the Kissimmee River and floodplain had resulted in significant loss of wetland and aquatic habitat and reduced populations of many species of fish and wildlife. The SFWMD, USACE, and other state and federal agencies collaborated through a long period of planning that included a demonstration project, experimentation, a physical model, and computer modeling. The recommended KRRP plan was described in the report *Central and Southern Florida Project Final Integrated Feasibility Report and Environmental Impact Statement Environmental Restoration Kissimmee River, Florida* (USACE 1991) and was authorized by the United States Congress in the Water Resource Development Act of 1992. The estimated final cost of the KRRP is approximately \$800 million.

The Headwaters Revitalization Schedule (HRS) was developed to provide the flows from S-65 needed to meet the ecological integrity goal of the KRRP to protect fish and wildlife and help re-establish pre-regulation populations. An interagency team (USACE, SFWMD, USFWS, and FWC) conducted analyses that considered 21 alternative schedules, as described in USACE (1996). After extensive analysis and completion of an environmental impact statement pursuant to the National Environmental Protection Act, the USACE adopted the HRS in 1996. The schedule will be implemented when KRRP construction is complete, which currently is projected for December 2020.

The HRS creates storage in the Headwaters Revitalization Lakes reservation waterbodies by allowing water levels to rise higher than the previous schedule. This allows water to accumulate in the reservation waterbodies during wetter seasons/years to be discharged at a rate that meets the KRRP's hydrologic and ecological integrity goals, which protect fish and wildlife as well as their habitats. Thus, the HRS ensures water levels in the Headwaters Revitalization Lakes reservation waterbodies support fish and wildlife while also meeting the downstream goals of the KRRP.

During development of the HRS, 21 alternatives were simulated using the UKISS model (Fan 1986) to estimate each alternative's effects on the hydrology of the Kissimmee River and Headwaters Revitalization Lakes. Ultimately, an alternative that fully met KRRP and Headwaters Revitalization Lakes project objectives was not found among the simulations (USACE 1996). However, the best-performing alternative, called RS9D, was endorsed and selected by the team agencies (USACE 1996) as the tentatively selected plan (now simply HRS). Because the 1996 simulations could not fully meet KRRP goals, SFWMD scientists concluded that the 1996 analysis supported the reservation of all water not already allocated from

the Kissimmee River and Headwaters Revitalization Lakes reservation waterbodies (**Appendix A**, Figures A-8 and A-9) to ensure protection of fish, wildlife, and habitat intended to benefit from the KRRP.

This conclusion was supported by modeling done specifically for the Kissimmee River and Chain of Lakes Water Reservations in 2008 (SFWMD 2009). The SFWMD developed the Alternative Formulation and Evaluation Tool – Water Reservation (AFET-W) model to simulate basin hydrology and create a “base condition” time series of stage and flow for locations throughout the Kissimmee Basin. AFET-W uses more current information (e.g., land use, existing legal uses) than the UKISS model, simulates a longer period of record (1965 to 2005), and has an expanded spatial domain that includes the LKB to the S-65E structure. An earlier version of the model (AFET) passed an external peer review that did not find any critical defects in the modeling tools (Loucks et al. 2008); AFET-W resulted from recalibration of AFET for a new set of reference evapotranspiration data. The AFET-W base condition includes all features of the completed KRRP (e.g., backfilling of C-38, removal of the S-65B and S-65C water control structures) using the 1996 HRS (alternative RS9D) for S-65 operations. Modeling results were presented in a previous draft technical document (SFWMD 2009). The analysis compared stage and flow duration curves for the base condition time series (representing water in the system) to a target time series representing the hydrologic needs of fish and wildlife. For this analysis, water was considered available for allocation if the duration curve for the base condition time series exceeded the curve for the target time series. Comparisons showed duration curves for the with-project base were below those for the upper threshold target time series for stage in the Headwaters Revitalization Lakes (SFWMD 2009, Figure 7-29 and Table 7-9), flows to the Kissimmee River at S-65 (SFWMD 2009, Figure 7-30), and stage in the Kissimmee River (SFWMD 2009, Figures 7-31 and 7-32). The results, therefore, indicate that all water not already allocated from the Kissimmee River and the Headwaters Revitalization Lakes reservation waterbodies (**Appendix A**, Figures A-8 and A-9) must be reserved. In other words, no additional water is available for allocation due to the overarching goals of restoration and protection of fish and wildlife in the public interest by the KRRP. The water is needed to ensure sufficient volume and timing of flow for Kissimmee River restoration. The peer-review panel, composed of five experts in the field, unanimously concluded that the approach was technically sound and the inferences and assumptions made regarding the linkages between hydrology and the protection of fish and wildlife were based on sound scientific information (Aday et al. 2009).

5.3 Establishment of Water Reservation Lines in the Upper Chain of Lakes

5.3.1 Approach

This section describes the development of hydrologic targets that protect fish and wildlife and their hydrologic requirements discussed in **Chapter 4**. Fish, amphibians, reptiles, birds, and mammals were considered during the development of the Water Reservations. The abundance of fish and wildlife is directly related to major wetland plant communities, which form the foundation and structure of fish and wildlife habitat associated with these waterbodies. The plant communities, in turn, depend on certain hydrologic requirements, which form the underpinnings of the hydrologic targets.

The UCOL reservation waterbodies are Lakes Hart-Mary Jane, Lakes Myrtle-Preston-Joel, the Alligator Chain of Lakes, Lake Gentry, East Lake Tohopekaliga, and Lake Tohopekaliga. An annual stage hydrograph was created for each of the six UCOL reservation waterbodies, which expresses the hydrologic requirements and annual water level pattern needed to protect existing fish and wildlife and their habitats in each waterbody (**Section 5.3.5**). Each hydrograph contains a water reservation line (WRL) that demarcates the boundary between water needed (at or below the line) and water not needed for the protection of fish and wildlife in the lake (above the line). The reservation hydrographs described here apply only to the UCOL, which are the lakes north of the Headwaters Revitalization Lakes. **Section 5.2** describes

the approach used to determine the water needs of fish and wildlife in the Headwaters Revitalization Lakes and Kissimmee River reservation waterbodies.

Each reservation hydrograph was developed to capture the historical duration of inundation (hydroperiod), which is a critical factor in determining plant community composition (Hill et al. 1998, Keddy 2000, Keddy and Fraser 2000, Wilcox and Nichols 2008), habitat availability, and fish and wildlife assemblages (Williams et al. 1985, Johnson et al. 2007) between the highest and lowest water levels in a littoral zone. Capturing the hydroperiod patterns required for fish and wildlife in the reservation waterbodies was done by: 1) protecting representative seasonal water levels in each waterbody; 2) limiting the total volume available for withdrawal throughout the reservation waterbodies; and 3) limiting withdrawals based on downstream water levels in Lake Okeechobee. Together, these criteria directly protect some portion of annual hydroperiods and indirectly protect year-to-year variation due to downstream constraints (**Section 5.4**).

The approach used to establish the WRLs in the reservation hydrographs for the UCOL reservation waterbodies was based on several assumptions: 1) existing fish and wildlife habitats and resources in the reservation waterbodies reflect recent hydrology; 2) protecting historical seasonal highs, lows, and some portion of transitions between those events will protect current fish and wildlife resources; and 3) these protections are sufficiently captured in the reservation hydrograph, similar to a regulation schedule.

A water level regime can be characterized in many ways, including magnitude (e.g., high and low water levels), timing (seasonality), duration, frequency of flooding, and rate of change (recession and ascension rates). All these characteristics can be represented on an annual hydrograph, except for how they vary between years or over a multi-year period (interannual variation). Most of the fish and wildlife requirements identified for the UCOL reservation waterbodies are expressed in terms of stage, seasonality, duration, and recession/ascension rate that can be represented on an annual stage hydrograph. The long-term maintenance of habitat for fish and wildlife in the lakes also depends on annual variability based on rainfall patterns. The WRLs developed for the UCOL reservation waterbodies protect these requirements by defining an upper boundary that preserves much of the interannual variation in water levels in these lakes.

The total amount of wetland habitat available within a reservation waterbody is related to the water level regime. Lowering water levels can reduce the amount and change the type of wetland habitat available to fish and wildlife, in three primary ways: 1) decreasing the amount of inundated area available at a given time; 2) shortening the hydroperiod in shallow areas and increasing light penetration in deeper areas, both of which can alter plant communities; and 3) decreasing the accessibility of habitat to fish and wildlife by reducing the amount of time that water levels provide adequate depth.

The current stage regulation schedules constrain the maximum water level in the UCOL reservation waterbodies for the protection of public health and safety (i.e., flood protection). Water levels in the reservation waterbodies will rise to the regulation schedule when there is sufficient rainfall. These high-water events define the upper limit of wetland vegetation in the lakes and maximize the quantity and distribution of habitat available for use by fish and wildlife. Higher water levels occurred prior to regulation, which would have allowed wetland plant communities and their associated fish and wildlife to occupy higher elevations than they currently do (**Section 4.3.2**). The reservation hydrographs and WRLs capture the current maximum water level on November 1 for all lakes and capture varying extents of inundation throughout the year based on historical stage data in different waterbodies.

Almost 40 years have passed since completion of the water control structures in the UCOL and more than 30 years since the current regulation schedules were adopted and implemented by the USACE for the UCOL reservation waterbodies. The existing fish and wildlife resources and littoral habitats in these lakes reflect the varied, long-term hydrological patterns of the different reservation waterbodies. Therefore, developing

WRLs that account for the heterogeneity among systems also protects the flora and fauna adapted to those unique hydrological patterns. The process to develop the WRLs involved 1) specifying a seasonal high stage and duration; 2) specifying a seasonal low stage; 3) connecting the seasonal high stage to the seasonal low stage with a straight-line recession event; and 4) adjusting the resulting WRL to protect historical breeding season and wet season hydrological patterns (recession and ascension rates or breeding season water levels).

5.3.2 Seasonal High Stage

The WRL seasonal high stage defines an upper stage limit or threshold that preserves the maximum littoral extent in each waterbody, ensuring no reduction in wetland extent will occur below that elevation. For all UCOL reservation waterbodies, the seasonal high stage was specified as the high stage limit of the current stage regulation schedule and to occur beginning on the first day the schedule allows that stage to be reached (November 1). The region's rainy season generally ends in October, so the regulation schedules allow higher lake stages coincident with the onset of the dry season (reduced chance of flooding). Therefore, establishing the seasonal high stage early in the dry season preserves higher lake levels as close to the wet season as possible under the current regulation schedules. Establishing the WRL seasonal high stages at the same stage and timing as the authorized regulation schedule also captures the water levels required to maintain the current shoreward extent of littoral/wetland vegetation in these waterbodies.

The duration of time protected at the seasonal high stage for each reservation waterbody was determined by reviewing annual lake stages between November 1 and March 15 from 1971 to 2019. These months coincide with the maximum stages allowed under the current regulation schedules for most waterbodies. For each UCOL reservation waterbody, the average date when lake stages reached the maximum regulation schedule during this period was calculated, as was the proportion of time that stages met or exceeded the schedule during this period. In other words, the average date lake stages reached the maximum of the regulation schedule (if they did) and how many days lakes were at maximum stage on average were determined. These two periods were combined to determine the amount of protection for each waterbody at "high pool," or at the maximum stage allowed under the current regulation schedule. For example, if the average date a particular waterbody reached the maximum regulatory stage was December 8, and the average number of days spent at or above the regulatory schedule each year was 23 days, then the seasonal high stage of the WRL would extend from November 1 to December 31 (December 8 + 23 days = December 31). This method provides protection at current maximum stages for the average duration and timing of historical events for each waterbody, based on individual lake stages.

5.3.3 Seasonal Low Stage

Selection of the seasonal low stage established how much of the littoral zone can be dried out on an annual basis (i.e., it defines the boundary between truly aquatic vegetation and those that require regular drying events). Under the current regulation schedules, lake stages are managed to reach the same low stage on May 31 every year, providing storage capacity for flood control at the beginning of the wet season. In order to protect the extent of permanently flooded marshes, the WRL minimums were set as the minimum of the regulation schedules. This ensures that the extent of annual drying events would not be increased downslope from historical levels, which might lead to a reduction in overall open-water extent, or an expansion of the littoral zone lakeward (downslope).

5.3.4 Transition Between Seasonal High and Low Stages

After selecting seasonal high and low stages for the UCOL reservation waterbodies, recession rates were established based on a review of historical dry-season stage data for each waterbody. Most regulation schedules for these lakes allow up to maximum water levels until March 15 (except on Lakes

Myrtle-Preston-Joel, which begin receding after December 1), before declining to a seasonal low on May 31. However, actual historical stages between November 1 and March 15 vary substantially between waterbodies because of differences in lake operations, how the current regulation schedule was established, watershed size, and groundwater interactions, among other factors. For example, historical stages on March 15 typically are well below the maximum of the regulation schedule even without releases on some waterbodies (e.g., the Alligator Chain of Lakes), whereas others very often are near the maximum (e.g., Lake Gentry) (**Figure 4-5**). Therefore, historical dry-season and breeding-season hydrology varies between the waterbodies, especially relative to their respective regulation schedules. In order to protect these varying historical patterns, scientists selected the average daily stage on March 15 and drew recession lines between the seasonal high and seasonal low targets. The resulting WRLs have a two-stage recession for most waterbodies, with a shallower slope prior to March 15 and a steeper slope afterward, which mimics natural dry-season patterns driven by rainfall and evapotranspiration. However, due to historical stage variation between waterbodies, the WRLs differ relative to their regulation schedules and their shapes differ between waterbodies. Essentially, lakes with lower historical stages have lower WRLs relative to their regulation schedule (and vice versa), but the level of protection is similar throughout, based on individual historical stages.

The differences between WRLs among the reservation waterbodies represent historical inundation patterns and water management of each waterbody, and the protection of dry-season stages is similar regardless of how the WRL compares to its regulation schedule. In all cases, the maximum stages are protected at the regulatory schedule maximum, based on average durations of historical high-water events, and protection declines gradually throughout the breeding season to roughly the average daily stage by March 15. This varying protection provides a higher probability of achieving maximum lake stages in the beginning of the dry season, with gradually lower probabilities of high stages until mid-March, and tailors each WRL to the historical hydrology persistent in each system. Additionally, the difference in lake volume between the WRL and regulation schedules declines after March 15 because historical stages are closely driven by flood control releases during the recession phase of the regulation schedule.

Two waterbodies had an additional change to the WRL to accommodate breeding season recession rates of the endangered snail kite. Lake Tohopekaliga and East Lake Tohopekaliga support a large breeding population of snail kites from year to year, having supported up to 80% of statewide snail kite nesting activity in a given year (Cattau et al. 2008). Like many fish and wildlife species, snail kites are vulnerable to rapidly receding water levels during the breeding season (Fletcher et al. 2017). Unfortunately, that is how the flood control line in some of the regulation schedules is designed (e.g., a decline in stage of 1.2 ft per month from mid-March to June on Lake Tohopekaliga and East Lake Tohopekaliga). In order to accommodate slower water level recession rates but still provide as much inundated littoral habitat as possible for nesting, water managers typically release water from these lakes (if stages are high) between January and May, inducing a longer, slower reduction in lake stages than the flood control portion of the regulation schedule would require. Essentially, these operations more closely mimic naturally receding water levels through the dry season, rather than holding high lake stages into March and then rapidly releasing them to make room for flood control storage before June. However, because this is a relatively recent practice (approximately 10 years of operations), the average historical stage on March 15 in the 1972 to 2019 period of record is higher on Lake Tohopekaliga and East Lake Tohopekaliga than typically is experienced after implementation of managed recession rates. Therefore, the WRLs were adjusted to more closely match recession rates recently targeted by water managers and to protect breeding season habitat for endangered snail kites. The WRLs were adjusted to accommodate a straight-line recession from high to low pool beginning January 1. On East Lake Tohopekaliga, this reduced the WRL duration at the top of the regulation schedule by 1 day, and the WRL elevation on March 15 by 0.24 ft (7.3 cm) from what it would be using the same method as other lakes. On Lake Tohopekaliga, this reduced the WRL duration at the top of the regulation schedule by 21 days, and the WRL elevation on March 15 by 0.43 ft (13.1 cm). This

change was not necessary for other UCOL reservation waterbodies due to lower average March 15 stages or to a lack of snail kite activity on those lakes.

Ascension rates from the seasonal low of the WRL were established in much the same fashion; the seasonal low stage was connected to the summer high stage with a straight line that would accommodate ascension rates of up to 1 ft (30.5 cm) per month. These ascension rates are slow enough that vegetation can keep up with rising water levels and reproduction requirements of fish and wildlife like apple snails and alligators are protected, but fast enough to capture early season rainfall and allow lake stages to recover from seasonal lows. The resulting WRLs protected the average daily lake stages or greater between June and August.

The largest difference between the WRLs and regulation schedules for most waterbodies occurs on June 1, which is when regulation schedules shift from prioritizing flood control to building water supply during the rainy season. This change in regulation schedule (from seasonal low to summer pool) varies from 0.5 ft on Lakes Hart-Mary Jane to 1.5 ft on Lake Gentry, East Lake Tohopekaliga, and Lake Tohopekaliga. While regulation schedules allow up to 1.5 ft higher stages on June 1 than on May 31, actual increases in water levels are a function of rainfall and watershed size and are reflected in the historical daily stage data. By reserving at least the average of daily stages from June to August, individual waterbodies' refill capacities are protected and reductions in wet season hydroperiod are limited to the 1- to 2-month period that the WRL is below the regulation schedule after June 1. In short, approximately the same percentile of historical stages is protected under the WRL on May 31 and June 1, but the difference between the WRL and regulation schedule on those days is substantial.

The approaches used to establish the WRLs described above do not represent a linear continuum of a certain percentile of historical stages between the seasonal high and seasonal low. The actual percentile values for each day of the WRL may fall between the 99th percentile (November 1 for the Alligator Chain of Lakes) and 22nd percentile (March 15 on Lake Tohopekaliga), depending on the waterbody and date. Furthermore, the actual future pattern of water level fluctuation in a reservation waterbody will depend on rainfall patterns, contributing surface water inflows, water management, and any permitted consumptive use. The threshold approach used to develop the reservation hydrographs does not explicitly address annual or interannual variation in water levels, but rather preserves the variability that occurs below the WRL). Combined with other rule constraints (**Section 5.4**), some portion of the interannual variability above the WRL is reserved as well, albeit at a less predictable rate than the portion under the WRL.

Changes in hydrologic conditions that may occur using the aforementioned approach to establish the WRL likely would manifest in the durations of inundation (hydroperiod) of the littoral marshes that lie between the seasonal high and low stages, and potentially the depth at which light penetration supports aquatic plant growth (especially submerged species at low elevations). These potential impacts were minimized by protecting at least the mean of daily stages through most of the dry season and by protecting the same highs and lows that are authorized under the current regulation schedules. Furthermore, by establishing the WRLs based on historical stages, the same general pattern of dry season recessions is preserved; long, slow, gradual recessions during historically drier systems (e.g., Alligator Chain of Lakes) and fast, managed recessions following high, stable stages in historically wetter systems (e.g., Lake Gentry).

5.3.5 Specific Water Reservation Lines for Lakes

Following the method described earlier, reservation hydrographs were developed for the six UCOL reservation waterbodies (**Figure 5-1**). For reference, the hydrographs also show the current stage regulation schedules that have been used for approximately the last 30 years as well as the interquartile range of average daily stages from May 1, 1971 to April 30, 2019 (Water Years 1972 to 2019) for each reservation waterbody.

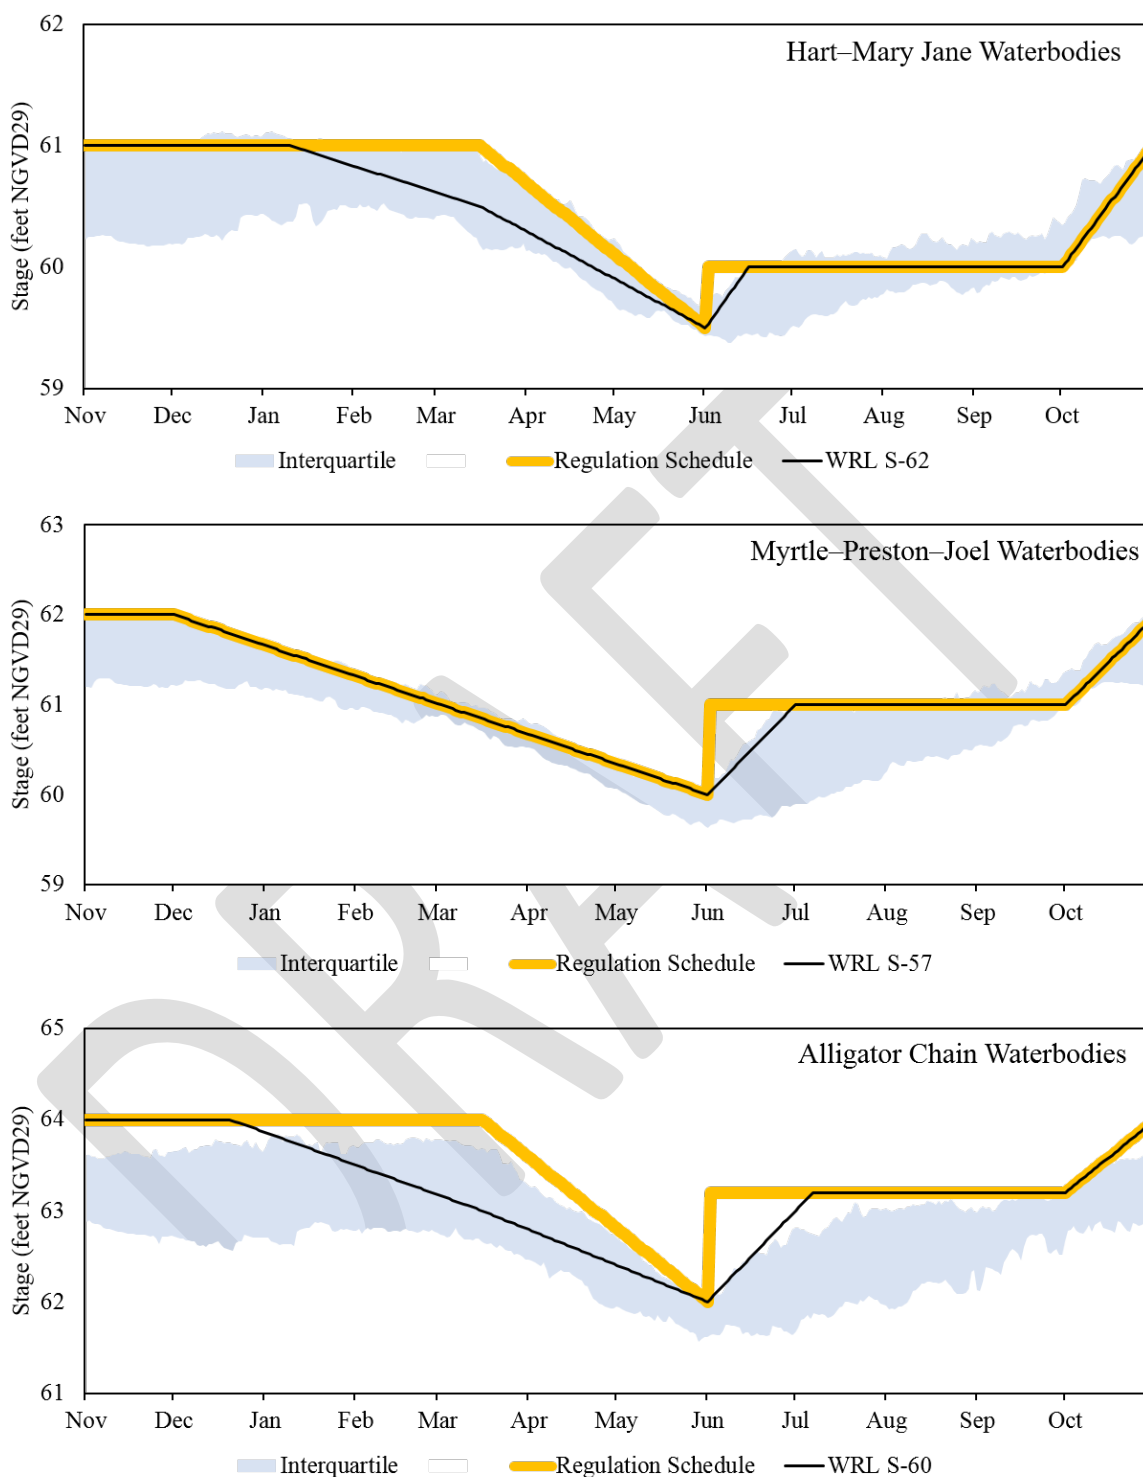


Figure 5-1. Water reservation hydrographs for the Lakes Hart-Mary Jane, Lakes Myrtle-Preston-Joel, and the Alligator Chain of Lakes reservation waterbodies. The water reservation line (WRL) is shown in black, and the federal regulation schedule is shown in yellow. The light blue shaded area represents the interquartile range (25th to 75th percentiles) of historical daily lake stages from May 1971 to April 2019.

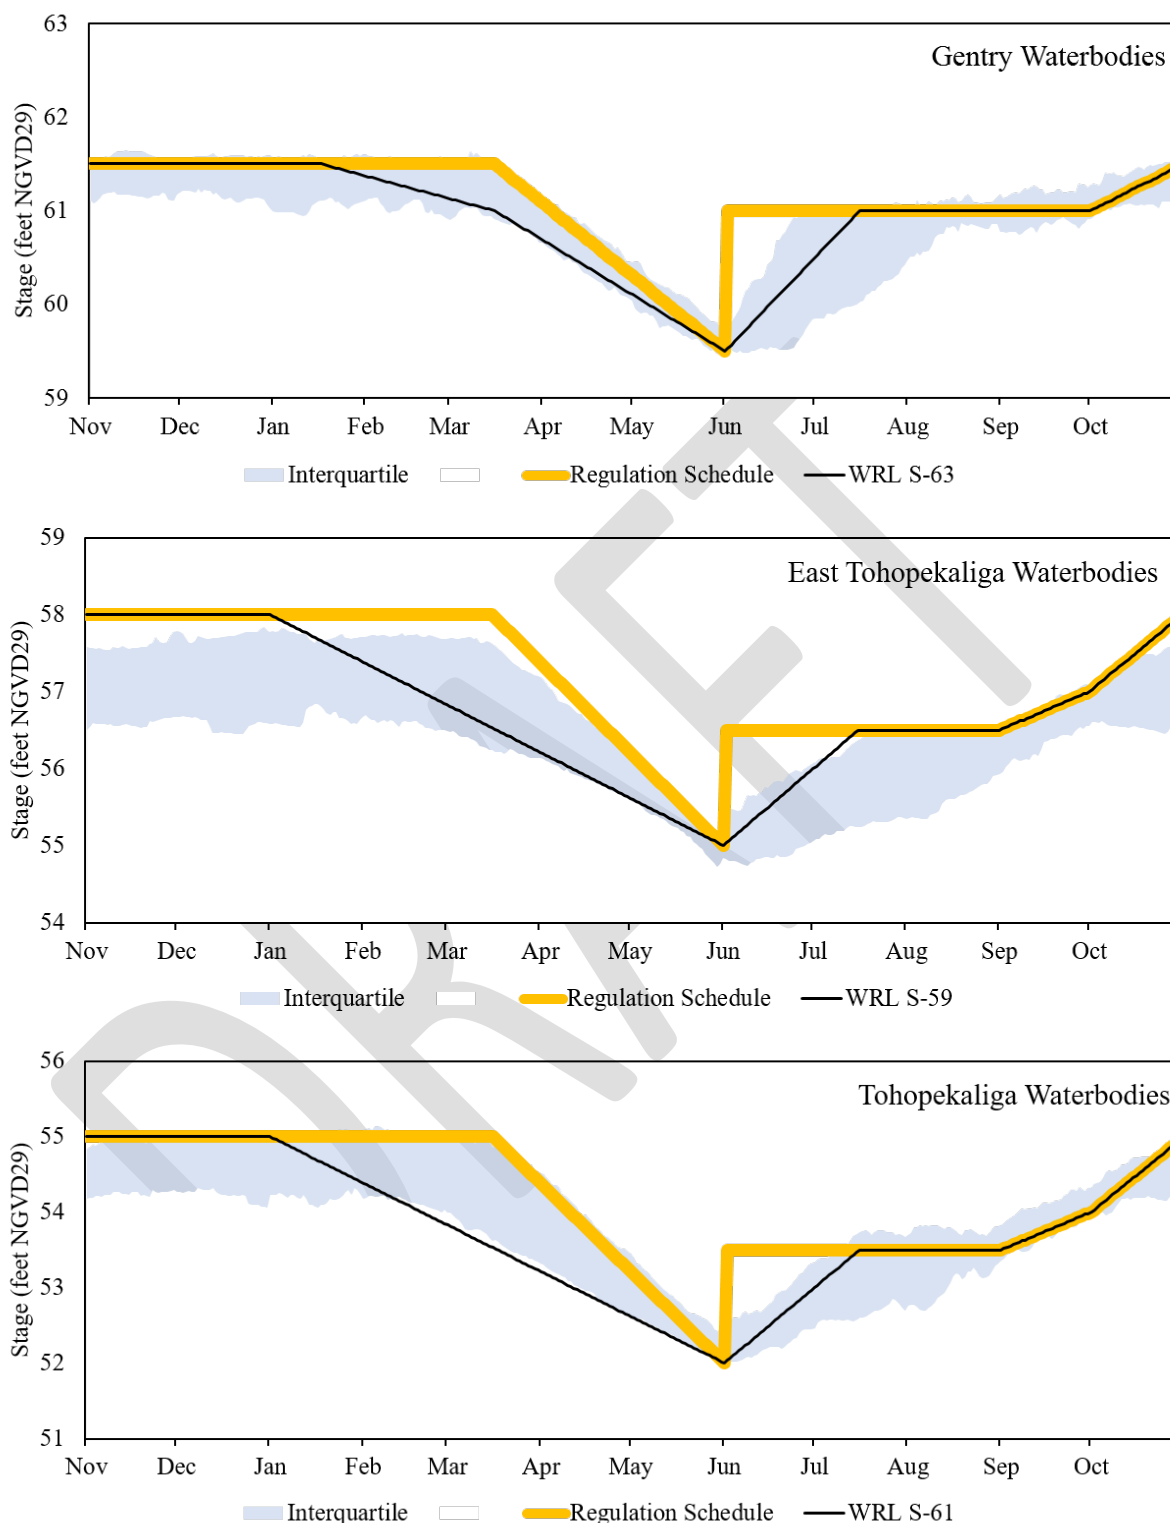


Figure 5-1 (cont.). Water reservation hydrographs for the Lake Gentry, East Lake Tohopekaliga, and Lake Tohopekaliga reservation waterbodies. The water reservation line (WRL) is shown in black, and the federal regulation schedule is shown in yellow. The light blue shaded area represents the interquartile range (25th to 75th percentiles) of historical daily lake stages from May 1971 to April 2019.

5.4 Impact Evaluation and Water to be Allocated

5.4.1 Existing Uses of Water from Proposed Reservation Waterbodies

Section 373.223(4), F.S., states that when establishing a Water Reservation, all presently existing legal uses of water shall be protected so long as such use is not contrary to the public interest. Existing water use permits were reviewed to determine the location and volumes under current allocations from the proposed reservation waterbodies. Historical uses also were identified. Permit selection included direct withdrawals of surface water from a reservation or contributing waterbody and withdrawals of groundwater from the SAS that could cause drawdown in a reservation waterbody. A search radius of 1 mile (1.6 km) around each proposed reservation waterbody was used to locate permitted groundwater withdrawals from the SAS.

Ninety-eight existing permits (**Table 5-1**) were identified that have at least one well completed in the SAS within 1 mile (1.6 km) of a reservation waterbody. In total, 5.7 million gallons per day (mgd) are allocated from the SAS within these 98 permits. Agricultural and livestock uses compose the majority of this volume. Sixteen existing permits (**Table 5-2**) were identified that withdraw surface water from reservation or contributing waterbodies, with a combined allocation of 70.7 mgd. Thirteen of these permits are for agriculture. The largest allocation (22.8 mgd) belongs to Wild Island Ranch from the Lake Istokpoga/Indian Prairie Canal System. The Lake Toho Restoration/Alternative Water Supply Permit (49-02549-W) allows for diversion of water from East City Ditch and Mill Slough into an aboveground impoundment for the supplementation of Toho Water Authority's reclaimed water supply. Withdrawals for this permit are constrained by specific daily water levels in Lake Tohopekaliga, consistent with the 2017 draft Water Reservation rules that existed at the time of permit issuance.

As discussed in **Section 5.3**, fish and wildlife within the proposed reservation waterbodies have adapted to the existing hydrologic conditions and approved regulation schedules that have been in place since the 1980s. This includes the effects of documented and any potentially undocumented historical uses that have occurred. Existing legal users were granted water use allocations for withdrawal after all water use permitting criteria were met at the time of permit issuance or renewal. All historical uses are reflected in the observed stage and flow data that were part of the evaluation to determine the water to be reserved for protection of fish and wildlife in the Kissimmee River and KCOL. The data and modeling associated with this evaluation show that the water within the Kissimmee Basin system is driven primarily by climate (rainfall and evapotranspiration) and operations rather than historical uses. During wet years, floodplain inundation most likely will correspond with regulatory flood control releases from Lake Okeechobee to either the Caloosahatchee River or St. Lucie Estuary when there is less demand for water.

During the state and federal planning and feasibility studies process, it was determined that "there would not be a significant effect on Lake Okeechobee water supply with the restoration of the Kissimmee River" (USACE 1991). Resultant effects (reductions) also are not expected in Everglades National Park.

1802 Table 5-1. Surficial aquifer system wells near the reservation waterbodies.

Permit Number	Project Name	Land Use	Average Daily Allocation (mgd)
28-00096-W	B and E Ranch and Grove	Livestock	0.0052
28-00016-W	Smith Okeechobee Farms	Agriculture	2.342
28-00290-W	Buckhorn Housing	Public Water Supply	0.0106
28-00379-W	Hidden Acres Estates	Public Water Supply	0.0192
28-00444-W	Trails End Fishing Resort	Public Water Supply	0.0103
28-00495-W	Butler Oaks Farm CNMP Implementation	Livestock	0.1945
28-00532-W	Depot Pasture Well	Livestock	0.0075
28-00538-W	B4 Inc., Dairy	Livestock	0.09
28-00551-W	Family Tree Lockett	Livestock	0.0027
28-00552-W	Ronald D Butler's Ranch	Livestock	0.0010
28-00646-W	Hickory Hammock – Equestrian Center	Livestock/Public Water Supply	0.0013
28-00650-W	Hickory Hammock – Istokpoga Boat Ramp	Public Water Supply	0.0012
28-00712-W	Pacos Ranch	Livestock	0.0026
28-00752-W	FRH Surficial Use	Livestock	0.0036
28-00769-W	Double Rock Ranch	Livestock	0.0445
47-00010-W	Lofton Ranch	Livestock	0.0006
47-00025-W	Clemons Okeechobee	Livestock	0.0171
47-00029-W	D Cross Ranch	Livestock	0.0072
47-00030-W	Bar Crescent S Ranch	Livestock	0.0262
47-00032-W	One Nine Cattle Company	Livestock	0.0084
47-00034-W	El Yolo 8	Agriculture	0.6302
47-00043-W	Eagle Island Farm	Agricultural	0.238
47-00381-W	Okeechobee Field Station	Landscape	0.0018
47-00498-W	Todd Clemons Grove	Agriculture	0.1897
47-00531-W	J A Tootle Property	Agricultural	0.0309
47-00706-W	Coquina Water Management (Office Well)	Public Water Supply	0.0005
47-00737-W	United States Army Corps of Engineering	Public Water Supply	0.0005
47-00880-W	Frances G Syfrett Ranch	Livestock	0.0062
47-00815-W	Raulerson and Sons Ranch	Agricultural/Livestock	0.8027
47-00836-W	Emory Walker Ranch	Livestock	0.0012
47-00837-W	Wallaces Brahmans	Agricultural/Livestock	0.0005
47-00856-W	Cabbage	Industrial	0.0068
47-00858-W	Lazy O Ranch	Livestock	0.0023
47-00880-W	Frances G. Syfrett Ranch	Livestock	0.0001
47-00894-W	Lamb Island and Dinner Island	Livestock	0.0035
47-00895-W	Dixie Pasture and KICCO Ranch	Livestock	0.0047
47-00908-W	Platts Bluff at Kennedy Farms	Livestock	0.0621
47-00913-W	Kissimmee Oaks	Livestock	0.0013
47-00923-W	Ruff Diamond	Livestock	0.0564
47-00925-W	Pete Beatty Ranch	Livestock	0.042
47-00928-W	MICCO (Bassinger)	Livestock	0.0063
47-00931-W	Horse Farm (68)	Livestock	0.0107
47-00932-W	Cracker Trail Country Store	Public Water Supply	0.0016
47-00934-W	C Hooker Farm	Livestock	0.0019
47-00940-W	Watford Cattle Company	Livestock	0.0041
47-00943-W	Thoroughbred Estates	Landscape	0.0158
47-00959-W	Alton Chandler Civic Center	Public Water Supply	0.0001
47-00979-W	Bassinger Shop Calves	Livestock	0.003
47-00988-W	101 Ranch Hwy 98	Livestock	0.0024
47-01025-W	Rocking J E Ranch (Cattle)	Livestock	0.0220
47-0126-W	CNC Ranch	Livestock	0.0102
47-01135-W	Corona Cattle Company	Livestock	0.0190
47-01149-W	Rocking E Ranch	Agriculture	0.1019

Permit Number	Project Name	Land Use	Average Daily Allocation (mgd)
47-01157-W	Robert Monroe Arnold	Livestock	0.0066
47-01192-W	Yates Marsh Lease/Kenedy Farms, Inc.	Livestock	0.0007
47-01193-W	Doug Marshall	Livestock	0.007
47-01241-W	Four K Ranch Lippencott	Livestock	0.0003
47-01270-W	Phitsini Elenburger	Agriculture	0.0242
47-01280-W	RMSCO Ranch	Agriculture	.0055
47-01298-W	Kennedy Farms, Inc. River Parcel	Livestock	0.0018
47-01373-W	Harmony Ranch	Nursery	.0121
47-01375-W	Camp Grace	Public Water Supply	0.0074
47-01380-W	C&R Groves	Agriculture	0.083
47-01394-W	Kissimmee Oaks Cattle	Livestock	0.0002
47-01401-W	Matt Johnson	Landscape	0.0033
47-01407-W	Robert Stark	Landscape	0.0065
47-01415-W	Chicken Coop	Agricultural	0.0008
48-02079-W	Southpark Circle Irrigation	Landscape	0.0106
48-02646-W	FedEx Ground	Landscape	0.0031
48-02663-W	Pedro Ordehi	Agricultural	0.0069
49-00450-W	Wild Florida	Public Water Supply	0.0155
49-00930-W	Marsh Landing	Landscape/Public Water Supply	0.003
49-00937-W	OGRVP, LLC	Public Water Supply	0.0133
49-02599-W	Lake Marian Restaurant	Public Water Supply	0.0001
49-01023-W	Joh-Vannah Nursery Inc	Nursery	0.0148
49-01041-W	Iglesia Bautista Central	Public Water Supply	0.0010
49-01135-W	Kissimmee Field Station	Public Water Supply	0.0041
49-01192-W	Flora Express Inc	Nursery	0.1397
49-01253-W	Les Murdock	Livestock	0.0001
49-01479-W	Adams Ranch	Livestock	0.0420
49-01674-W	Silver Spurs Club	Landscape/Public Water Supply/Livestock	0.0041
49-01678-W	Griffis Estates	Livestock	0.0003
49-01737-W	C E Outdoor Services Nursery	Nursery	0.0558
49-01827-W	Neptune Road Widening	Landscape	0.0092
49-01882-W	4433 O B T-Repair Shop	Public Water Supply	0.0002
49-01949-W	Sunshine Greenery Nursery	Nursery	0.0077
49-01985-W	Twin Lakes	Agricultural	0.17
49-02256-W	Fells Cove	Landscape	0.0058
49-02281-W	Premium Peach LLC	Agricultural	0.0044
49-02331-W	Home Rehab Source-Zuni Road	Landscape	0.0171
49-02348-W	Bexley Ranch/Lake Marian	Livestock	0.0172
49-02516-W	Poinciana Personal Storage	Landscape	0.0031
49-02703-W	El Maximo Livestock	Livestock	0.0241
53-00263-W	Lake Loft Well	Landscape	0.0184
53-00265-W	Highway 60 Plant Nursery	Nursery	0.0300
53-00271-W	Shady Oaks Limited Use WTF	Public Water Supply	0.0003
53-00297-W	Lake Hatchineha Ranch LLC	Public Water Supply/Livestock	0.0054
53-00327-W	ORFIBLU	Agricultural	0.0132
Total			5.705

1803 mgd = million gallons per day.

1804 Table 5-2. Surface water pumps near the reservation waterbodies.

Permit Number	Project Name	Land Use	Source	Average Daily Allocation (mgd)
28-00130-W	Wild Island Ranch	Agriculture	Lake Istokpoga/Indian Prairie Canal System	22.84
28-00146-W	Fort Basinger Grove	Agriculture	Istokpoga Canal and C-41A Canal	0.29
28-00116-W	Smith Okeechobee Farms	Agriculture	SFWMD C-41A Canal	5.123
28-00357-W	River Grove	Agriculture	C-38 Canal	5.71
49-00051-W	Lakeside Groves, Inc.	Agriculture	Live Oak Lake	0.23
49-00077-W	Number 4 Grove	Agriculture	Pearl Lake	0.50
49-00097-W	Turkey Hammock	Agriculture	Lake Kissimmee	3.23
49-00150-W	Macy Island Citrus	Agriculture	Lake Tohopekaliga	0.15
49-00776-W	Adams Ranch	Agriculture	Lake Marian	13.75
49-00938-W	Heart Bar Ranch Seed and Sod	Agriculture	On-site canal (drains to the C-34 Canal)	0.78
49-01409-W	Shingle Creek Stormwater Reuse	Public Water Supply	Shingle Creek	6.00
49-01960-W	Lakeshore Stormwater Augmentation	Public Water Supply	Lake Tohopekaliga	2.00
49-02330-W	Bexley Ranch/Lake Marian	Agriculture	Lake Marian	1.28
53-00031-W	Grove Number 91	Agriculture	Lake Pierce	0.42
53-00032-W	Chastain Block	Agriculture	Lake Pierce	0.18
49-02549-W	Lake Toho Restoration/AWS	Public Water Supply	East City Ditch/Mill Slough	8.22
Total				70.703

1805 mgd = million gallons per day.

1806 **5.4.2 Downstream Threshold at S-65 for the Kissimmee River Restoration**

1807 **Project**

1808 An evaluation was performed to ensure future water withdrawals from the reservation waterbodies will not
 1809 exceed a threshold that negatively affects downstream restored systems (i.e., KRRP) due to insufficient
 1810 flows. The determination of an acceptable level of change in flows at the S-65 structure was based on the
 1811 range of acceptability concept developed during earlier technical work for the Water Reservations that was
 1812 peer reviewed in 2009. In the earlier technical work, the range of acceptability was applied to the river
 1813 performance by selecting targets for the performance measures that represented an upper and lower range
 1814 of hydrologic conditions that should be equally protective of fish and wildlife. The use of the upper and
 1815 lower performance measure targets to create an upper and lower threshold target time series of discharge is
 1816 described in more detail in Section 7 of SFWMD (2009).

1817 Average discharge at the S-65 structure was 976 cfs for the lower threshold target time series and 1,077 cfs
 1818 for the upper threshold time series. An acceptable level of change in discharge should be less than the
 1819 difference between the average discharges of the upper and lower threshold target time series. Using the
 1820 reduction from the upper threshold to the midpoint between the upper and lower threshold averages should
 1821 provide a margin of safety. The midpoint between the average S-65 discharge for the upper and lower
 1822 thresholds is 1,026.5 cfs. The difference between the average discharge for the upper threshold and the
 1823 midpoint between the upper and lower threshold is 50.5 cfs. A reduction from the upper threshold to the
 1824 midpoint is $(1,077 - 1,026.5)/1,026.5 \times 100\% = 5\%$. This suggests that a reduction of less than 5% should
 1825 be acceptable to protect the water needed for fish and wildlife.

1826 A conservative analysis was performed to look at a hypothetical reduction in flows at the S-65 structure
 1827 from future withdrawals to determine what effect this would have on the KRRP performance measures. For
 1828 this analysis, mean daily discharge was reduced 5% every day for a 41-year period (1965 to 2005). The
 1829 effect of this hypothetical reduction in flows was evaluated by changes in the number of days (duration) of
 1830 floodplain inundation and the duration of low flows.

The draft Water Reservation rules limit withdrawals within each UCOL reservation waterbody based on the WRL, while restricting all surface water withdrawals from the Headwaters Revitalization Lakes and the Kissimmee River and floodplain. An added level of protection was incorporated into the draft Water Reservation rules, requiring an applicant demonstrate that its proposed withdrawal, individually and cumulatively with all withdrawal allocations permitted since 2005, do not reduce average discharges at the S-65 structure by more than 5% compared to the no-withdrawal scenario over a range of climatic variability between 1965 and 2005. In 2009, it was determined that a less than 5% reduction in average flows to the Kissimmee River would not result in impacts to the river. A water use permit was issued to Toho Water Authority in 2017 (Water Use Permit 49-02549-W; **Table 5-2**) that reduced the average cumulative discharges at S-65 by 0.9%. As a result, the reduction of future cumulative discharges at S-65 has been reduced to 4.1% ($5\% - 0.9\% = 4.1\%$), which is reflected in the draft Water Reservation rules. This individual and cumulative downstream check at the S-65 structure provides an extra level of assurance that future water uses will not adversely affect the water needed for the protection of fish and wildlife in the Kissimmee River and Chain of Lakes or the ecological integrity goal of the KRRP.

5.4.3 Lake Okeechobee Constraint for the Lake Okeechobee Service Area

Restricted Allocation Area (RAA) criteria are established by rule for specific sources where there is insufficient water to meet projected needs. In October 2008, the SFWMD Governing Board adopted RAA criteria for the Lake Okeechobee Service Area (LOSA) (Subsection 3.2.1.F of the Applicant's Handbook (SFWMD 2015b)). The LOSA RAA criteria were established to address lower lake management levels and storage under the USACE's interim Lake Okeechobee Regulation Schedule (2008 LORS). The RAA criteria were incorporated into the Minimum Flow and Minimum Water Level (MFL) recovery strategy for Lake Okeechobee when the MFL strategy changed from prevention to recovery. **Figure 5-2** shows the spatial extent of the LOSA RAA. The 2008 amendment (SFWMD 2008) to Appendix H of the *2000 Lower East Coast Water Supply Plan* contains background information on the regulatory context for Lake Okeechobee's change to an MFL recovery strategy, the LOSA RAA, and future expectations for the lake's MFL status.

The LOSA RAA criteria generally limit surface water withdrawals from Lake Okeechobee and all surface waters hydraulically connected to the lake to base condition water uses occurring from April 1, 2001 to January 1, 2008. For surface water users in LOSA, studies and analyses supporting the 2008 LORS projected a decline in the physical level of certainty of agricultural uses reliant on lake water supplies, from a 1-in-10 year to a 1-in-6 year drought return frequency (SFWMD 2018).

Public comment received in 2015 from LOSA agricultural users expressed concerns that future withdrawals in the UKB would reduce their level of certainty below the 1-in-6 drought frequency currently predicted under 2008 LORS. To prevent this from occurring and to protect existing legal users within LOSA, a downstream Lake Okeechobee constraint has been incorporated into the draft Water Reservation rules.

The Applicant's Handbook (SFWMD 2015b) will be revised simultaneously with adoption of the draft Water Reservation rules [Chapter 40E-10, Florida Administrative Code] to include new criteria pertinent to water withdrawals from reservation and contributing waterbodies, including a requirement and criteria for water use permit applicants to demonstrate the proposed use will not impact existing legal users in LOSA. To provide such assurance, a permittee will be required to perform a daily downstream check of Lake Okeechobee stage prior to withdrawing surface water or groundwater from a reservation or contributing waterbody. Withdrawals can only occur when regulatory releases from Lake Okeechobee are being made to either the Caloosahatchee River or St. Lucie Estuary and other regulatory constraints are met.

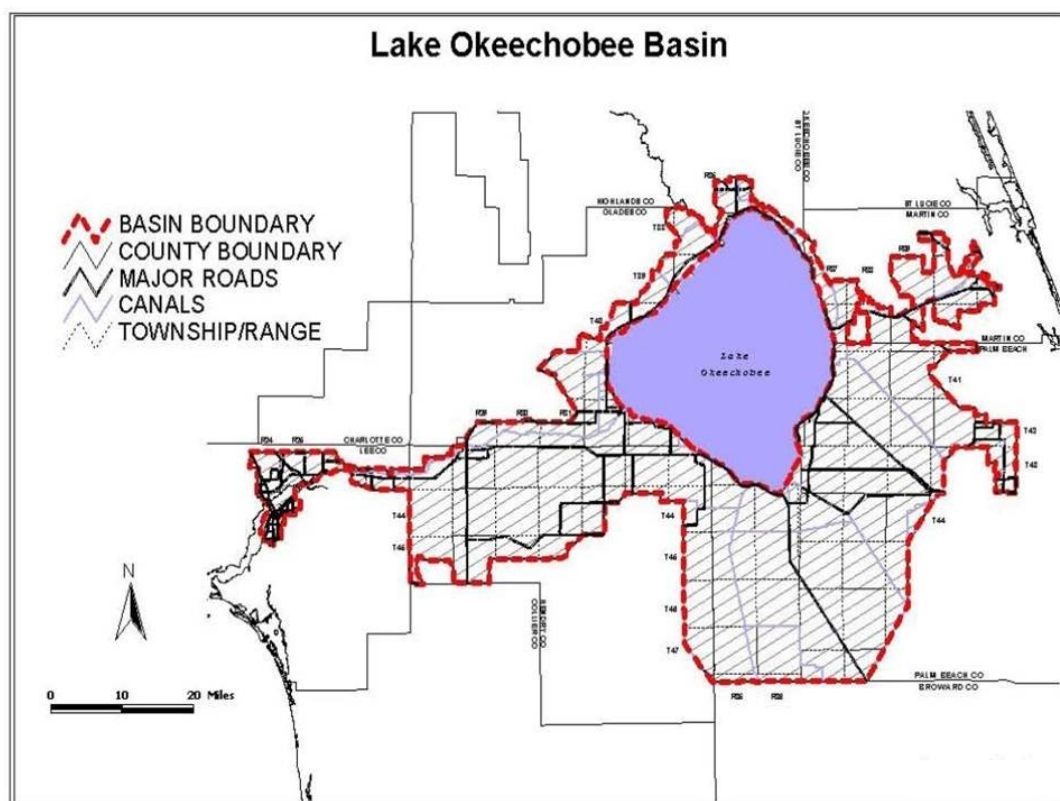


Figure 5-2. The Restricted Allocation Area rule boundary for the Lake Okeechobee Service Area.

5.5 Modeling Tool for Evaluating Future Water Use Withdrawals

To assist with the evaluation and permitting of future water use withdrawals, the Upper Kissimmee Operations Simulation (UK-OPS) Model was developed. The UK-OPS Model directly computes the allowable timing of proposed withdrawals consistent with the constraints and criteria in the draft Water Reservation rules. This section provides an overview of the UK-OPS Model and a hypothetical example withdrawal scenario to demonstrate the model capabilities and outputs. More detailed information regarding the UK-OPS Model is provided in **Appendix C**.

5.5.1 Overview of the Upper Kissimmee – Operations Simulation Model

The UK-OPS Model is a coarse-scale water management hydrologic simulation model developed to quickly test alternative water operation strategies. Additional model features were created to evaluate the effects of surface water withdrawals based on the draft Water Reservation rules.

The increasing utility and computational power of Microsoft Excel® made the spreadsheet software program a logical platform to build the UK-OPS Model. The model is a simple, daily time-step, continuous simulation model of the hydrology and operations in the primary UKB lakes. Analysts can use the UK-OPS Model to easily test a variety of operating strategies and quickly receive feedback of the performance for the primary lake management objectives.

The UK-OPS Model and documentation report were peer reviewed in November 2019. The model was deemed technically sound, appropriately developed, and usable for the intended applications. Technical details of the UK-OPS Model are provided in **Appendix C**. **Appendix D** contains the peer-review reports.

5.5.2 Sensitivity Analysis of Hypothetical Water Supply Withdrawals with Kissimmee Water Reservation Criteria

The UK-OPS Model investigated effects of hypothetical water supply withdrawals from UCOL waterbodies with the constraints and criteria in the draft Water Reservation rules. Water supply withdrawal reliability was assessed with and without the proposed Lake Okeechobee constraint discussed in **Section 5.4.3**. A sensitivity analysis was conducted to evaluate the effects of hypothetical water supply withdrawals from one UCOL reservation waterbody, Lake Tohopekaliga. Results of the sensitivity analysis are presented in the following sections. **Figures 5-3** and **5-4** illustrate example WRLs for East Lake Tohopekaliga and Lake Tohopekaliga, respectively. The red dashed line is a draft of the WRL (since modified as shown in **Section 5.3.5** and **Appendix B** as black lines), which was designed to protect the water needed for protection of fish and wildlife in the lake system. The general concept is that water withdrawals can occur if the lake stage is above the WRL. For example, if water withdrawals are contemplated from the Lakes Hart-Mary Jane reservation waterbody, then the daily stage must exceed the WRL for that day before a withdrawal can occur. A Lake Okeechobee constraint was added to the draft Water Reservations rules to prevent impacts to downstream users within LOSA. If the rule constraints are met, then withdrawals can occur on that day. The process to check these rule constraints repeats each day of the simulation.

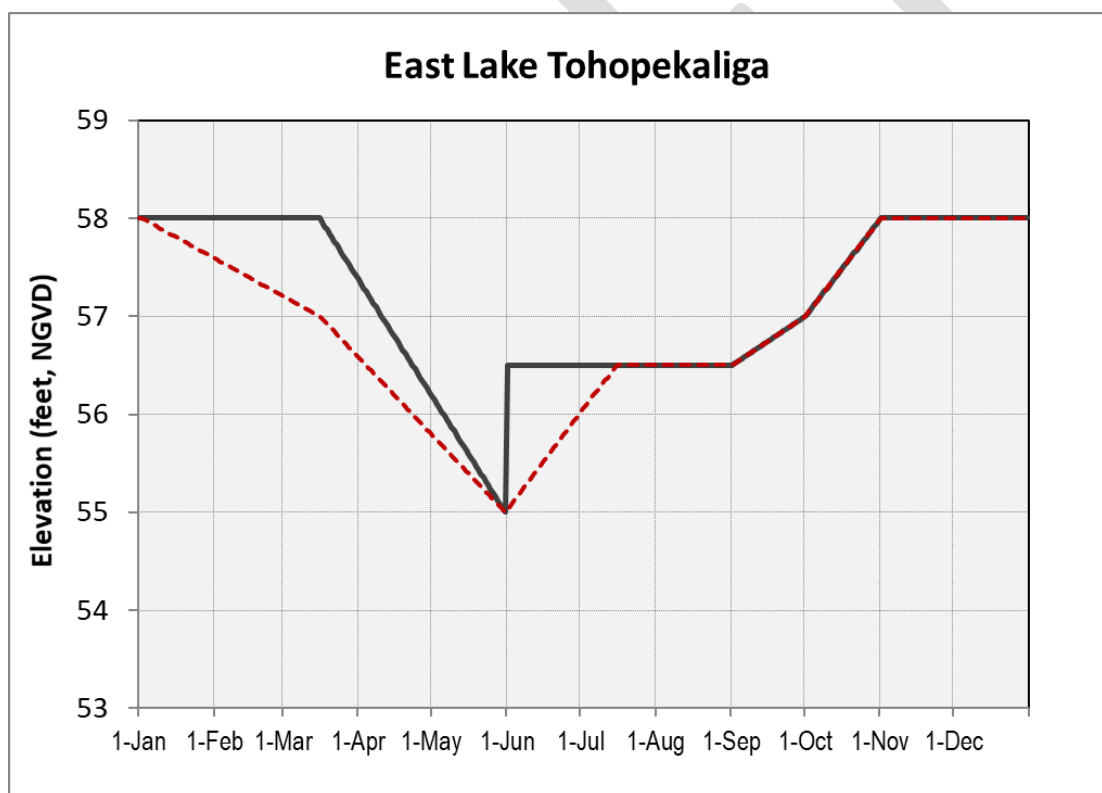


Figure 5-3. East Lake Tohopekaliga regulation schedule (black line) and a draft water reservation line (red dashed line).

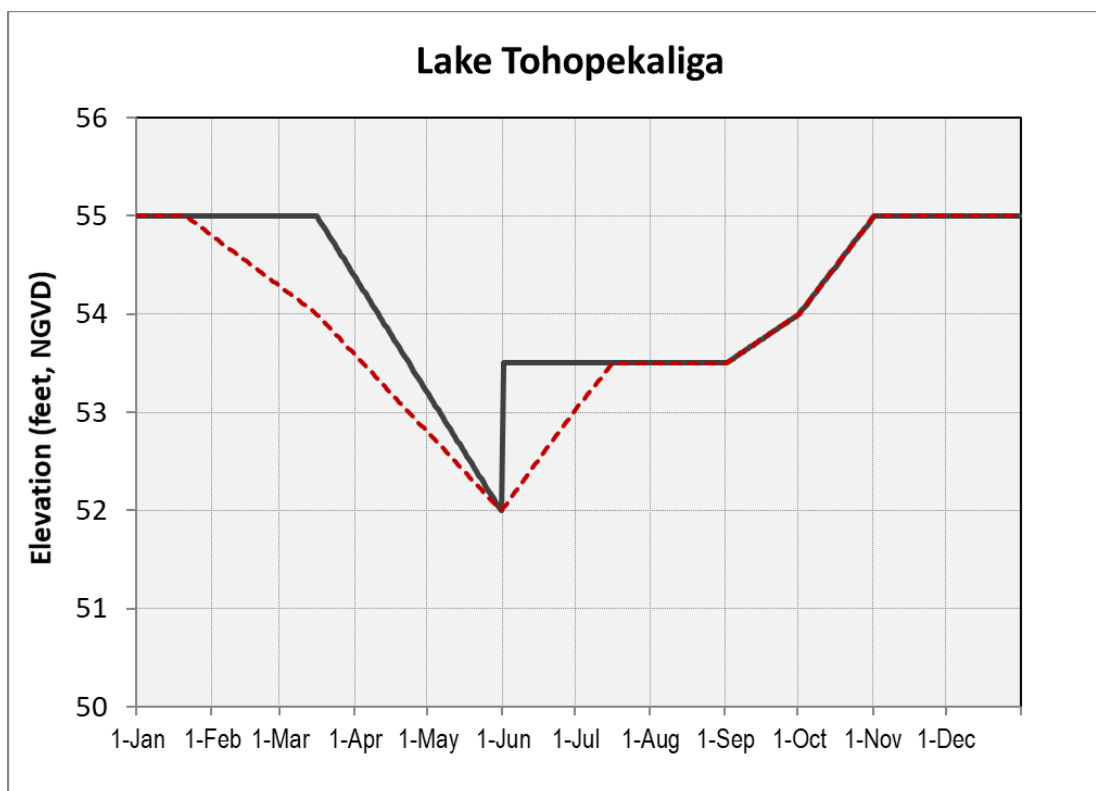


Figure 5-4. Lake Tohopekaliga regulation schedule (black line) and a draft water reservation line (red dashed line).

5.5.2.1 Baseline Scenario

The first scenario simulation (hereafter referred to as Base) was a baseline that used the authorized HRS and the standard regulation schedules for East Lake Tohopekaliga and Lake Tohopekaliga (Figures 5-3 and 5-4, respectively). No water supply withdrawals were assumed.

5.5.2.2 Water Supply Withdrawal Scenario 1


Scenario 1, hereafter WSmax, used the same assumptions as the Base but included water supply withdrawals from Lake Tohopekaliga. The capacity of the infrastructure needed to make the withdrawal was fixed at 64 mgd (99 cfs), but the daily withdrawal rate was subject to the constraints and criteria in the draft Water Reservation rules. No other water supply withdrawals from other lake systems were assumed in this hypothetical scenario.

5.5.2.3 Water Supply Withdrawal Scenario 2

Scenario 2, hereafter WSmaxL, was identical to Scenario 1 except for the addition of the Lake Okeechobee constraint. The Base simulation was used for the relative comparison. Comparison with WSmax also was informative. The Lake Okeechobee constraint was designed to limit adverse impacts to existing legal users in LOSA. Withdrawals from UCOL reservation waterbodies could reduce water availability downstream. The Lake Okeechobee constraint limits withdrawals from UCOL reservation waterbodies to occur only when regulatory releases from Lake Okeechobee are occurring to either the Caloosahatchee River or St. Lucie Estuary.

1937 The approximation of the Lake Okeechobee constraint is depicted in **Figure 5-5**. When the stage is above
 1938 the Low Sub-band of the 2008 LORS, indicating regulatory releases are being discharged to tide, the
 1939 hydrograph is green. The hydrograph is red when the stage is below the Low Sub-band of the 2008 LORS,
 1940 indicating relatively low water conditions with no regulatory discharge to tide. When the lake stage is red,
 1941 the Lake Okeechobee constraint is not met and no water supply withdrawals can be made from reservation
 1942 or contributing waterbodies. When the lake stage is green, indicating regulatory releases are occurring from
 1943 Lake Okeechobee to either the Caloosahatchee River or St. Lucie Estuary, then the Lake Okeechobee
 1944 constraint is met and withdrawals are allowed from reservation or contributing waterbodies, provided all
 1945 other regulatory constraints (criteria) are met. This approximation of the Lake Okeechobee constraint is
 1946 tied to the 2008 LORS when regulatory releases occur, but it can be modified as needed when a revised
 1947 regulation schedule is implemented for Lake Okeechobee. The objective is to capture the timing of when
 1948 regulatory releases are discharged to tide.

Lake Okeechobee constraint limits withdrawals to occur only when Lake O regulatory releases are made to tide

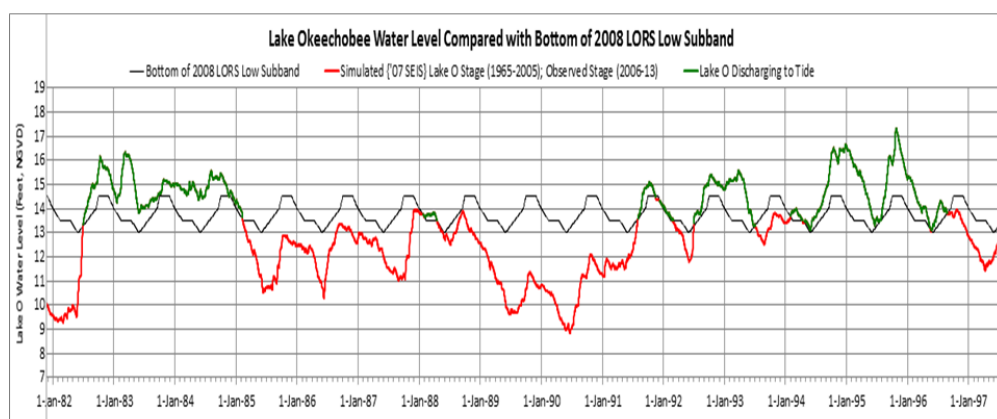

Green = stage above LORS Low Subband, Lake O regulatory discharges to tide,
WS from UK Lakes not limited by Lake O

Red = stage below LORS Low Subband, no Lake O regulatory discharges to tide,
NO WS from UK Lakes (59% of time)

1949
 1950 Figure 5-5. Lake Okeechobee constraint used by the UK-OPS Model.

1951 5.5.2.4 Simulation Results

1952 The UK-OPS Model simulations of the Base, WSmax, and WSmaxL scenarios revealed the effects of one
 1953 possible withdrawal scenario on the constraints and criteria of the draft Water Reservation rules. The
 1954 outputs examined and presented here are limited to comparisons of Lake Tohopekaliga water budgets and
 1955 stage percentiles, S-65 annual flow, and water supply reliability.

1956 Lake Tohopekaliga Water Budget

1957 **Figure 5-6** shows the Lake Tohopekaliga annual water budget for the WSmax and WSmaxL simulations.
 1958 The water supply withdrawal component is shown for each simulation year and is small relative to the other
 1959 water budget components. The WSmaxL scenario has less volume of withdrawal. Annual average
 1960 withdrawal reduces from 39,000 acre-feet per year for WSmax to 19,000 acre-feet per year for WSmaxL,
 1961 a 51% reduction. The reduction is due to the Lake Okeechobee constraint, which reduces the number of
 1962 days surface water or groundwater withdrawals can be made.

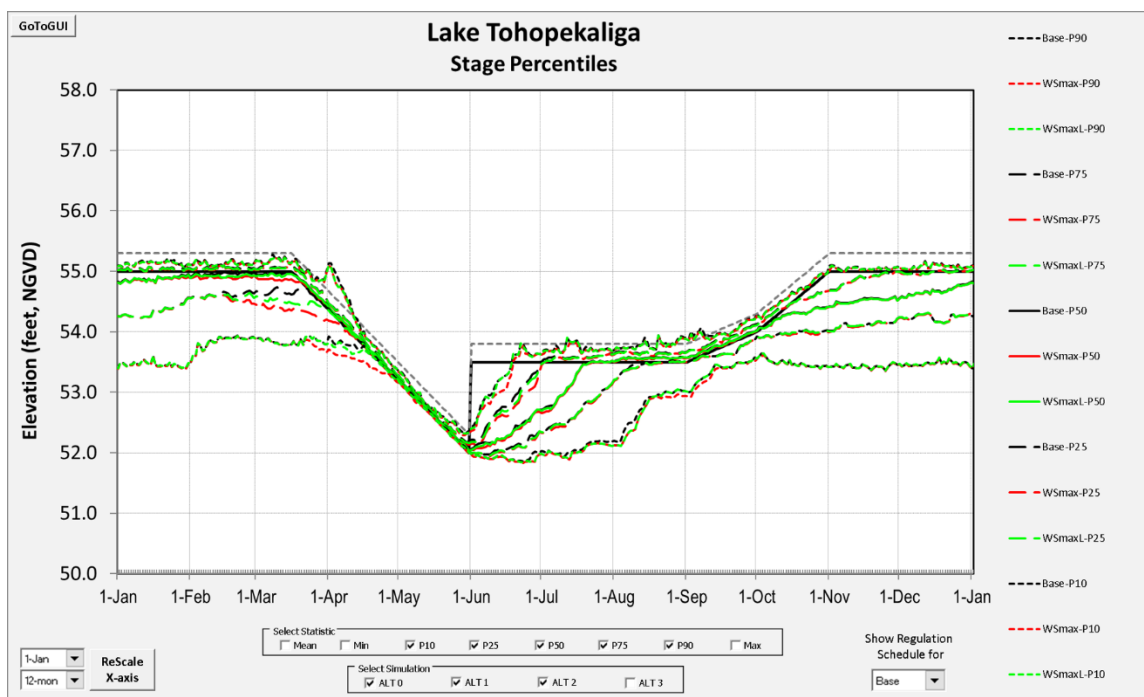


Figure 5-7. Lake Tohopekaliga stage percentiles.

S-65 Annual Flow

A key threshold for the draft Water Reservation rule criteria is that the reduction in mean annual flow for the 41-year simulation period cannot exceed 5%. This permitting criterion will be used for evaluating future withdrawals. This criterion is not, nor can it be, a criterion for real-time operations to determine if withdrawals can occur. This permitting criterion is evaluated at the time an applicant submits a water use permit application to ensure the proposed withdrawal does not impact restoration efforts associated with the KRRP or the water needed for protection of fish and wildlife.

Figure 5-8 shows the mean annual flow for the WSmact scenario is exactly -5.0%. The maximum withdrawal capacity of 64 mgd was determined by iteratively running the model until this limit was reached. Thus, if all future water supply withdrawals were to come from Lake Tohopekaliga, they could not exceed a total of 64 mgd. Withdrawals permitted in the future likely will be in various amounts and from any of the six lake systems that allow withdrawals, subject to the WRLs and downstream constraints. This is one reason why the UK-OPS Model is needed: to evaluate each proposed withdrawal in the context of the accumulated withdrawals that have already been permitted. As discussed previously, one water use permit recently was authorized, leaving only 4.1% of future reductions in the mean annual flow at the S-65 structure. Once the 5% threshold is reached, no further withdrawals will be permitted.

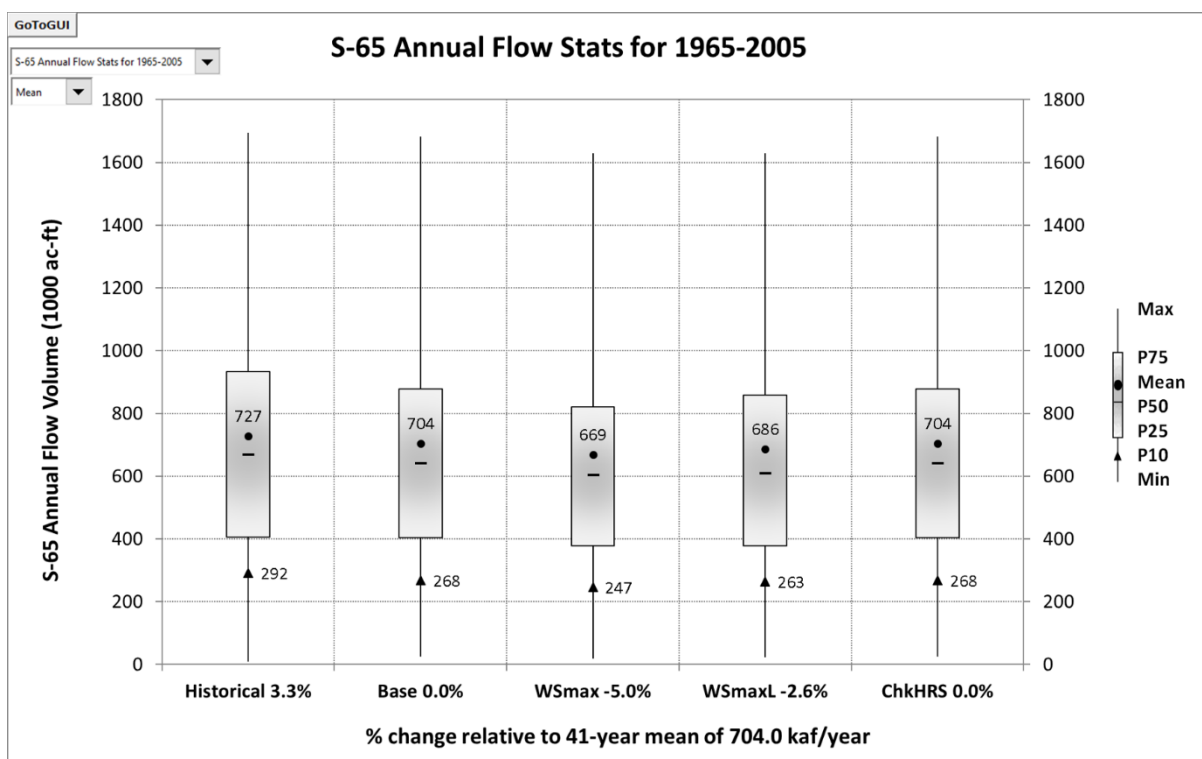


Figure 5-8. Annual flow at the S-65 structure.

Water Supply Reliability

The simulated water supply reliability information for the WSmax and WSmaxL scenarios are shown in **Tables 5-3** and **5-4**, respectively. The target reliability (percent of time water supply withdrawals occur) was set at 70%. Users can change this target to match the level of performance desired for their particular project. The table summaries show the reliability with the WSmax scenario is 8 calendar years out of the 49 years simulated. The WSmaxL scenario has only 4 years out of 49 years simulated that meet or exceed the 70% reliability target. This result illustrates the impact of the Lake Okeechobee constraint. A larger pump size can be tested to determine if supply targets can be better met. The reliability measures reflect the timing of withdrawals, but larger withdrawals could occur within the allowable days if they do not exceed the 5% limit described previously. These scenarios can be tested using the UK-OPS Model.

2000 Table 5-3. Lake Tohopekaliga water supply reliability for the WSmax scenario.

	Lake TOH Water Supply Reliability Table for WSmax															Percent of Time WS Withdrawal			
	No. of Days per Month with Lake Toho WS Withdrawals at 99.0 cfs (64.0 MGD)												Days	Vol(kaf)	AvgMGD	CalYear	WetSeas	DrySeas	WatYear
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	May-Oct	Nov-Apr	May-Apr
1965	0	16	31	30	31	1	9	31	8	7	0	14	178	34.96	31.21	48.8%	47.3%		
1966	23	28	31	30	31	14	31	31	30	15	0	0	264	51.85	46.29	72.3%	82.6%	74.1%	58.4%
1967	0	16	31	30	31	0	8	31	20	1	0	0	168	33.00	29.46	46.0%	49.5%	50.9%	62.7%
1968	0	0	0	25	31	26	30	31	10	0	0	0	153	30.05	26.75	41.8%	69.6%	26.3%	31.7%
1969	19	28	31	30	31	0	0	0	6	27	21	22	215	42.23	37.70	58.9%	34.8%	65.6%	64.7%
1970	31	28	31	30	31	9	0	10	0	0	0	0	170	33.39	29.81	46.6%	27.2%	91.5%	62.2%
1971	0	0	3	28	31	0	0	0	0	0	0	0	62	12.18	10.87	17.0%	16.8%	29.2%	22.2%
1972	0	0	13	30	31	0	6	23	6	0	0	0	109	21.41	19.06	29.8%	35.9%	34.7%	20.2%
1973	0	26	31	30	31	3	0	13	29	11	0	0	174	34.18	30.51	47.7%	47.3%	55.7%	41.9%
1974	0	14	31	30	31	2	30	31	30	4	0	0	203	39.87	35.59	55.6%	69.6%	50.0%	44.4%
1975	0	0	21	30	31	0	0	27	19	11	2	0	141	27.70	24.72	38.6%	47.8%	38.7%	49.0%
1976	4	29	31	30	31	19	28	29	26	2	0	0	229	44.98	40.04	62.6%	73.4%	59.6%	50.3%
1977	5	28	31	30	31	1	0	5	13	2	0	3	149	29.27	26.13	40.8%	28.3%	59.0%	62.7%
1978	19	28	31	30	31	0	6	29	3	0	0	0	177	34.77	31.04	48.5%	37.5%	67.0%	44.7%
1979	4	28	31	30	31	1	0	0	27	7	0	0	159	31.23	27.88	43.6%	35.9%	58.5%	44.4%
1980	20	29	31	30	31	3	0	0	0	0	0	0	144	28.28	25.18	39.3%	18.5%	66.2%	48.1%
1981	0	0	0	0	11	4	0	3	21	0	0	13	52	10.21	9.12	14.2%	21.2%	5.2%	9.3%
1982	25	28	31	30	31	30	31	31	28	13	0	0	278	54.60	48.74	76.2%	89.1%	74.5%	45.5%
1983	7	28	31	30	31	13	20	31	28	13	7	15	254	49.89	44.54	69.6%	73.9%	59.9%	71.2%
1984	31	29	31	30	31	3	27	30	4	0	0	0	216	42.43	37.77	59.0%	51.6%	81.7%	76.2%
1985	0	0	9	30	31	0	0	30	27	10	0	0	137	26.91	24.02	37.5%	53.3%	33.0%	36.7%
1986	30	28	31	30	31	0	0	23	12	0	0	0	185	36.34	32.44	50.7%	35.9%	70.8%	59.5%
1987	29	28	31	30	31	2	0	0	0	0	19	29	199	39.09	34.89	54.5%	17.9%	70.3%	50.4%
1988	18	29	31	30	30	0	0	12	26	0	2	28	206	40.46	36.02	56.3%	37.0%	87.3%	51.6%
1989	11	11	29	30	31	0	0	18	17	6	0	0	153	30.05	26.83	41.9%	39.1%	67.0%	49.0%
1990	0	5	31	30	31	0	0	20	0	0	0	0	117	22.98	20.51	32.1%	27.7%	45.8%	37.8%
1991	0	2	29	30	31	30	31	31	13	16	0	0	213	41.84	37.35	58.4%	82.6%	43.4%	30.7%
1992	0	22	31	30	31	13	20	27	29	19	6	27	255	50.09	44.59	69.7%	75.5%	53.5%	64.2%
1993	29	28	31	30	31	5	0	0	10	0	0	0	164	32.21	28.76	44.9%	25.0%	85.8%	79.5%
1994	2	28	31	30	31	23	25	31	30	16	28	31	306	60.10	53.65	83.8%	84.8%	57.5%	37.5%
1995	30	28	31	30	31	0	5	31	27	28	13	10	264	51.85	46.29	72.3%	66.3%	98.6%	91.5%
1996	30	29	31	30	31	30	23	21	19	5	0	0	249	48.91	43.54	68.0%	70.1%	81.7%	72.4%
1997	7	28	31	30	31	4	12	29	5	0	1	28	206	40.46	36.12	56.4%	44.0%	59.9%	61.6%
1998	31	28	31	30	31	2	0	0	5	3	0	0	161	31.62	28.23	44.1%	22.3%	84.9%	63.0%
1999	0	26	31	30	31	1	13	27	14	30	26	12	241	47.34	42.26	66.0%	63.0%	55.7%	35.1%
2000	18	29	31	30	31	0	0	9	7	0	0	0	155	30.45	27.10	42.3%	25.5%	83.1%	71.6%
2001	0	0	0	26	31	3	16	27	30	5	0	0	138	27.11	24.20	37.8%	60.9%	26.9%	20.0%
2002	0	24	31	30	31	22	31	31	30	3	12	28	273	53.62	47.87	74.8%	80.4%	54.7%	54.0%
2003	31	28	31	30	31	25	31	31	21	8	2	16	285	55.98	49.97	78.1%	79.9%	90.1%	84.4%
2004	21	29	31	30	31	0	12	29	30	31	26	12	282	55.39	49.31	77.0%	72.3%	75.1%	75.4%
2005	30	28	31	30	31	30	29	31	9	7	27	21	304	59.71	53.30	83.3%	74.5%	88.7%	79.5%
2006	10	28	31	30	31	0	2	12	21	0	0	0	165	32.41	28.93	45.2%	35.9%	84.0%	77.8%
2007	0	26	31	30	31	20	21	20	14	8	0	1	202	39.68	35.42	55.3%	62.0%	55.7%	41.9%
2008	10	29	31	30	31	0	8	30	23	4	0	0	196	38.50	34.27	53.6%	52.2%	62.0%	58.7%
2009	0	19	31	30	31	30	31	31	25	1	0	11	240	47.14	42.08	65.8%	81.0%	52.4%	48.2%
2010	16	28	31	30	31	30	19	2	0	0	0	0	187	36.73	32.79	51.2%	44.6%	69.3%	72.6%
2011	0	20	31	30	31	0	9	31	25	26	20	3	226	44.39	39.63	61.9%	66.3%	52.8%	44.7%
2012	4	27	31	30	31	6	28	29	29	13	0	0	228	44.78	39.87	62.3%	73.9%	68.5%	64.8%
2013	0	14	31	30	31	25	31	31	28	3	0	0	224	44.00	39.28	61.4%	81.0%	50.0%	57.8%
MEANS																			
48YR	11	21	27	29	31	9	13	21	17	7	4	7	197	38.71	34.53	54.0%	52.9%	61.5%	54.0%
41YR	12	21	27	29	30	8	12	21	16	7	5	8	195	38.27	34.14	53.4%	51.1%	61.9%	53.4%

2001
2002

2003 Table 5-4. Lake Tohopekaliga water supply reliability for the WSmaxL scenario.

Lake TOH Water Supply Reliability Table for WSmaxL																Percent of Time WS Withdrawal			
No. of Days per Month with Lake Toho WS Withdrawals at 99.0 cfs (64.0 MGD)													Days	Vol(kaf)	AvgMGD	CalYear	WetSeas	DrySeas	WatYear
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	May-Oct	Nov-Apr	May-Apr
1965	0	16	29	0	0	0	0	0	0	0	0	0	45	8.84	7.89	12.3%	0.0%		
1966	1	28	30	11	0	4	31	31	30	15	0	0	181	35.55	31.74	49.6%	60.3%	33.0%	19.2%
1967	0	16	15	0	0	0	0	0	0	0	0	0	31	6.09	5.44	8.5%	0.0%	14.6%	38.9%
1968	0	0	0	0	0	2	30	31	10	0	0	0	73	14.34	12.76	19.9%	39.7%	0.0%	0.0%
1969	0	0	22	26	22	0	0	0	6	27	21	22	146	28.68	25.60	40.0%	29.9%	33.0%	33.2%
1970	31	28	31	30	31	9	0	10	0	0	0	0	170	33.39	29.81	46.6%	27.2%	91.5%	59.7%
1971	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	13.7%
1972	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1973	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1974	0	0	0	0	0	0	0	29	30	4	0	0	63	12.37	11.05	17.3%	34.2%	0.0%	0.0%
1975	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	17.3%
1976	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1977	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1978	0	0	0	0	0	0	0	29	3	0	0	0	32	6.29	5.61	8.8%	17.4%	0.0%	0.0%
1979	4	28	31	30	31	1	0	0	27	7	0	0	159	31.23	27.88	43.6%	35.9%	58.5%	34.2%
1980	20	29	31	30	31	3	0	0	0	0	0	0	144	28.28	25.18	39.3%	18.5%	66.2%	48.1%
1981	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	9.3%
1982	0	0	0	0	0	1	31	31	28	13	0	0	104	20.43	18.24	28.5%	56.5%	0.0%	0.0%
1983	7	28	31	30	31	13	20	31	28	13	7	15	254	49.89	44.54	69.6%	73.9%	59.9%	54.8%
1984	31	29	31	30	31	3	27	30	4	0	0	0	216	42.43	37.77	59.0%	51.6%	81.7%	76.2%
1985	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	26.0%
1986	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1987	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1988	5	28	31	16	0	0	0	0	0	0	0	0	80	15.71	13.99	21.9%	0.0%	37.6%	21.9%
1989	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1990	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1991	0	0	0	0	0	0	0	30	13	16	0	0	59	11.59	10.35	16.2%	32.1%	0.0%	0.0%
1992	0	20	0	0	0	0	22	27	29	19	6	27	150	29.46	26.23	41.0%	52.7%	9.4%	21.6%
1993	29	28	31	30	31	5	0	0	0	0	0	0	154	30.25	27.00	42.2%	19.6%	85.8%	67.9%
1994	1	28	31	20	31	23	25	31	30	16	28	31	295	57.94	51.73	80.8%	84.8%	52.4%	31.8%
1995	30	28	31	30	31	0	5	31	27	28	13	10	264	51.85	46.29	72.3%	66.3%	98.6%	91.5%
1996	30	29	31	30	24	30	23	16	0	0	0	0	213	41.84	37.25	58.2%	50.5%	78.4%	72.4%
1997	0	0	0	0	0	0	0	0	2	0	0	21	23	4.52	4.03	6.3%	1.1%	0.0%	25.5%
1998	31	28	31	30	31	2	0	0	1	4	0	0	158	31.03	27.70	43.3%	20.7%	81.1%	39.2%
1999	0	26	26	0	0	0	8	7	14	30	26	12	149	29.27	26.13	40.8%	32.1%	24.5%	24.7%
2000	18	29	31	10	0	0	0	0	0	0	0	0	88	17.28	15.39	24.0%	0.0%	59.2%	50.5%
2001	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
2002	0	25	2	0	0	0	7	31	30	3	0	21	119	23.37	20.87	32.6%	38.6%	12.7%	7.4%
2003	31	28	31	22	12	27	31	31	21	8	2	16	260	51.07	45.59	71.2%	70.7%	68.4%	55.9%
2004	21	29	23	0	0	0	0	0	16	31	26	12	158	31.03	27.63	43.2%	25.5%	42.7%	60.4%
2005	30	25	31	30	22	30	29	31	9	7	27	21	292	57.35	51.20	80.0%	69.6%	83.0%	55.1%
2006	10	28	31	30	4	0	0	0	0	0	0	0	103	20.23	18.06	28.2%	2.2%	71.2%	75.3%
2007	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	1.1%
2008	0	0	0	0	0	0	0	4	23	4	0	0	31	6.09	5.42	8.5%	16.8%	0.0%	0.0%
2009	0	0	0	0	0	0	0	31	25	1	0	0	57	11.20	9.99	15.6%	31.0%	0.0%	8.5%
2010	0	11	31	30	31	30	19	2	0	0	0	0	154	30.25	27.00	42.2%	44.6%	48.6%	35.3%
2011	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	22.5%
2012	0	0	0	0	0	0	0	0	0	29	13	0	42	8.25	7.34	11.5%	22.8%	0.0%	0.0%
2013	0	14	31	30	31	25	31	31	28	3	0	0	224	44.00	39.28	61.4%	81.0%	50.0%	32.1%
MEANS																			
48YR	7	12	14	10	9	4	7	11	9	5	3	4	96	18.80	16.77	26.2%	24.6%	27.9%	26.2%
41YR	8	13	14	10	9	4	7	11	9	6	4	5	100	19.55	17.44	27.3%	24.6%	29.7%	27.3%
SUMMARY STATISTICS																CalYear	WetSeas	DrySeas	WatYear
No. of years used for stats																49	49	48	48
Years used for stats																'65-'13	'65-'13	'66-'13	'66-'13
# Yrs with WS duration > 70%																4	4	8	4
Annual Exceedance Frequency																8.2%	8.2%	16.7%	8.3%
Return Period (1-in-Nyrs)																12.3	12.3	6.0	12.0

2004
2005

2006 The UK-OPS Model will be used as a regulatory tool by water use permit applicants and the SFWMD to
2007 ensure permitting thresholds needed to protect fish and wildlife are not exceeded by future withdrawals.
2008 The UK-OPS Model also can be used as a planning tool to help potential users understand the reliability of
2009 a water source in the future. An independent scientific peer review was conducted on the UK-OPS Model
2010 in November 2019. The SFWMD received a positive peer review, and the reviewers confirmed the model
2011 was appropriately developed for its intended purpose. More information regarding the UK-OPS Model
2012 documentation report and the peer review are contained in **Appendices C and D**.

2013 The Central Florida Water Initiative (2015) regional water supply plan developed by multiple state
2014 agencies, water management districts, and stakeholders indicated there will be increasing need for new
2015 water supplies in Central Florida to meet future growth and potentially augment existing sources within and
2016 beyond SFWMD boundaries in the coming years. Unreserved water, above that needed for protection of
2017 fish and wildlife in the UCOL reservation waterbodies, could be allocated to meet some of the water supply
2018 needs in Central Florida.

2019 **5.6 Summary**

2020 All unallocated surface water in the Kissimmee River and in the Headwaters Revitalization Lakes up to the
2021 stages in the HRS at S-65 (**Appendix B**, Figure B-7 and Table B-7) will be reserved. The Water Reservation
2022 is needed for protection of fish and wildlife and to ensure successful completion and implementation of the
2023 KRRP. The approach used to establish the WRLs within each UCOL waterbody was presented. The
2024 approach uses data from established hydrologic patterns for fish and wildlife and their respective habitats,
2025 which considers seasonality, duration, seasonal highs and lows, interannual variability, and other factors.
2026 The recession and ascension rates associated with the WRLs protect the breeding season and reproductive
2027 requirements of fish and wildlife, including listed species (e.g., Snail Kites).

2028 Each reservation waterbody in the UCOL has a unique WRL based on historical inundation patterns and
2029 water management practices that fish and wildlife have adapted to since the regulation schedules were
2030 implemented. The WRLs show the water needed for fish and wildlife, while the water above this line is
2031 available for allocation to meet future water demands within Central Florida.

2032 The UK-OPS Model was developed as a regulatory tool to ensure water needed for fish and wildlife is
2033 protected and the permitting threshold at the S-65 structure is not exceeded. Several model runs were
2034 presented to demonstrate model utility. The model is expected to be used by permittees and SFWMD
2035 regulatory staff in the future. The UK-OPS Model was evaluated by independent scientific peer reviewers.

2036 The draft Water Reservation rules will prohibit new and increased uses of surface water from the
2037 Headwaters Revitalization Lakes and the Kissimmee River reservation waterbodies and limit the
2038 availability of future water use from UCOL reservation and contributing waterbodies. The draft Water
2039 Reservation rules will protect against future water use impacts and provide assurance that the water needed
2040 for fish and wildlife will be protected. Once in effect, the SFWMD's water use permitting program will use
2041 the Water Reservation rules and implementing criteria to ensure water use permit applicants do not
2042 withdraw reserved water.

2043 **LITERATURE CITED**

- 2044 Adamski, J.C. and E.E. German. 2004. *Hydrogeology and Quality of Ground Water in Orange County,*
2045 *Florida*. Water Resources Investigations Report 03-4257, United States Geological Survey,
2046 Tallahassee, FL.
- 2047 Aday, D., J.D. Allan, B.L. Bedford, M.W. Collopy, and R. Prucha. 2009. *Scientific Peer Review of the Draft*
2048 *Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes.*
2049 Unpublished Report. South Florida Water Management District, West Palm Beach, Florida.
- 2050 Aho, J.M., C.S. Anderson, and J.W. Terrell. 1986. *Habitat Suitability Index Models and Instream Suitability*
2051 *Curves: Redbreast Sunfish*. Biological Report 82(10.119). United States Fish and Wildlife Service,
2052 Washington, D.C.
- 2053 Anderson, D.H. 2014a. *Interim hydrologic responses to Phase I of the Kissimmee River Restoration Project,*
2054 *Florida*. Restoration Ecology 22(3):353-366.
- 2055 Anderson, D.H. 2014b. *Geomorphic responses to interim hydrology following Phase I of the Kissimmee*
2056 *River Restoration Project, Florida*. Restoration Ecology 22(3):367-375.
- 2057 Anderson, D., S.G. Bousquin, G.E. Williams, and D.J. Colangelo. 2005. *Kissimmee River Restoration*
2058 *Studies, Volume II, Defining Success: Expectations for the Kissimmee River Restoration*. Technical
2059 Publication ERA 433. South Florida Water Management District, West Palm Beach, FL.
- 2060 Arthington, A.H. 2012. *Environmental Flows: Saving Rivers in the Third Millennium*. University of
2061 California Press, Berkeley, CA.
- 2062 Aucott, W.R. 1988. *Areal Variation in Recharge too and Discharge from the Floridan Aquifer System in*
2063 *Florida*. Water Resources Investigations Report 88-4057. United States Geological Survey,
2064 Tallahassee, FL.
- 2065 Bain, M.B. 1992. *Study Designs and Sampling Techniques for Community-level Assessment of Large*
2066 *Rivers*, pp. 63-74. In: T.F. Cuffney and M.E. Gurtz (eds.), *Proceedings of Biological Assessments*
2067 *in Large Rivers*. North American Benthological Society Fifth Annual Technical Workshop,
2068 Louisville, KY.
- 2069 Bartlett, R.D. and P.P. Bartlett. 1999. *A Field Guide to Florida Reptiles and Amphibians*. Gulf Publishing
2070 Company, Houston, TX.
- 2071 Bennett, A.J. 1992. *Habitat Use by Florida Sandhill Cranes in the Okefenokee Swamp, Georgia,*
2072 *pp. 121-129. In: D.A. Wood, Proceedings 1988 North American Crane Workshop, February 22-24,*
2073 *1988, Lake Wales, Florida. Nongame Wildlife Program Technical Report 12, Florida Game and*
2074 *Fresh Water Fish Commission, Tallahassee, FL.*
- 2075 Bonvechio, T.F. and M.S. Allen. 2005. *Relations between hydrologic variables and year-class strength of*
2076 *sportfish in eight Florida waterbodies*. Hydrobiologia 532:193-207.
- 2077 Bousquin, S.G. and J. Colee. 2014. *Interim responses of littoral river channel vegetation to reestablished*
2078 *flow after Phase I of the Kissimmee River Restoration Project*. Restoration Ecology 22(3):388-396.

- 2079 Bousquin, S.G., D.H. Anderson, D.J. Colangelo, and G.E. Williams. 2005a. *Introduction to Baseline*
2080 *Studies of the Channelized Kissimmee River*. In: S.G. Bousquin, D.H. Anderson, G.E. Williams
2081 and D.J. Colangelo (eds.), Kissimmee River Restoration Studies, Volume I, Establishing a
2082 Baseline: Pre-Restoration Studies of the Channelized Kissimmee River. Technical Publication
2083 ERA 432. South Florida Water Management District, West Palm Beach, FL.
- 2084 Bousquin, S.G., D.H. Anderson, G.E. Williams, and D.J. Colangelo (eds.). 2005b. *Kissimmee River*
2085 *Restorations Studies, Volume I, Establishing a Baseline: Pre-Restoration Studies of the*
2086 *Channelized Kissimmee River*. Technical Publication ERA 432. South Florida Water Management
2087 District, West Palm Beach, FL.
- 2088 Bousquin, S.G., D.H. Anderson, D.J. Colangelo, J.L. Glenn III, J.W. Koebel Jr., and G.E. Williams. 2007.
2089 *Phase I of the Kissimmee River Restoration Project: Initial River Channel Responses*, pp. 1-10.
2090 In: K.C. Kabbes (ed.), Proceedings of the 2007 World Environmental and Water Resource
2091 Congress: Restoring Our Natural Habitat. American Society of Civil Engineers, Tampa, FL.
- 2092 Bousquin, S.G., D.H. Anderson, M.D. Cheek, D.J. Colangelo, L. Dirk, J.L. Glenn, B.L. Jones, J.W. Koebel,
2093 J.A. Mossa, and J. Valdes. 2009. *Chapter 11: Kissimmee Basin*. In: 2009 South Florida
2094 Environmental Report, Volume I: The South Florida Environment. South Florida Water
2095 Management District, West Palm Beach, FL.
- 2096 Brenner, M., M.W. Binford, and E.S. Deevey. 1990. *Lakes*, pp. 364-391. In: R.L. Myers and J.J. Ewel
2097 (eds.), *Ecosystems of Florida*. University of Central Florida Press, Orlando, FL.
- 2098 Buehler, D.A. 2000. *Bald Eagle (Haliaeetus leucocephalus)*, Number 506. In: A. Poole and F. Gill (eds.),
2099 *The Birds of North America*. The Birds of North America, Inc., Philadelphia, PA.
- 2100 Carlander, K.D. 1977. *Handbook of Freshwater Fish Biology, Volume Two*. Iowa State University Press,
2101 Ames, IA.
- 2102 Carnal, L.L. and S.G. Bousquin. 2005. *Chapter 10: Areal Coverage of Floodplain Plant Communities in*
2103 *Pool C of the channelized Kissimmee River*. In: S.G. Bousquin, D.H. Anderson, G.E. Williams, and
2104 D.J. Colangelo (eds.), Kissimmee River Restoration Studies, Volume I, Establishing a Baseline:
2105 Pre-Restoration Studies of the Channelized Kissimmee River. Technical Publication ERA 432.
2106 South Florida Water Management District, West Palm Beach, FL.
- 2107 Cattau, C., W. Kitchens, B. Reichert, A. Bowling, A. Hotaling, C. Zweig, J. Olbert, K. Pias, and J. Martin.
2108 2008. *Demographic, movement, and habitat studies of the endangered snail kite in response to*
2109 *operational plans in Water Conservation Area 3A*. United States Geological Survey, Florida
2110 Cooperative Fish and Wildlife Research Unit, University of Florida, Gainesville, FL.
- 2111 Cattau, C., B. Reichert, W. Kitchens, R. Fletcher Jr., J. Olbert, K. Pias, E. Robertson, R. Wilcox, and
2112 C. Zweig. 2012. *Snail Kite Demography Annual Report*. United States Geological Survey, Florida
2113 Cooperative Fish and Wildlife Research Unit, University of Florida, Gainesville, FL.
- 2114 Central Florida Water Initiative. 2015. *Central Florida Water Initiative Regional Water Supply Plan:*
2115 *Volume I. Planning Document*.
- 2116 Cheek, M.D., G.E. Williams, S.G. Bousquin, J. Colee, and S.L. Melvin. 2014. *Interim Response of Wading*
2117 *Birds (Pelecaniformes and Ciconiiformes) and Waterfowl (Anseriformes) to the Kissimmee River*
2118 *Restoration Project, Florida, U.S.A.* Restoration Ecology 22(3):426-434.

- 2119 Colangelo, D.J. 2014. *Interim response of dissolved oxygen to reestablished flow in the Kissimmee River,*
2120 *Florida, U.S.A.* Restoration Ecology 22(3):376-387.
- 2121 Cooke, G.D., E.B. Welch, S.A. Peterson, and P.R. Newroth. 1993. *Restoration and management of lakes*
2122 *and reservoirs*. Second edition. Lewis Publishers, Boca Raton, Florida.
- 2123 Darby, P.C. and H.F. Percival. 2000. *Dry Down Tolerance of the Florida Apple Snail (Pomacea paludosa*
2124 *Say): Effects of Age and Season*. Research Work Order 182, United States Geological Survey,
2125 Washington, D.C.
- 2126 Darby, P.C., R.E. Bennetts, J.D. Croop, P.L. Valentine-Darby, and W.M. Kitchens. 1999. *A comparison of*
2127 *sampling techniques for quantifying abundance of the Florida apple snail (Pomacea paludosa,*
2128 *Say)*. Journal of Molluscan Studies 65:195-208.
- 2129 Darby, P.C., R.E. Bennetts, S.J. Miller, and H.F. Percival. 2002. *Movements of Florida apple snails in*
2130 *relation to water levels and drying events*. Wetlands 22:489-498.
- 2131 Darby, P., R. Bennetts, and F. Percival. 2008. *Dry down impacts on apple snail (Pomacea paludosa)*
2132 *demography: Implications for wetland water management*. Wetlands 28:204-214.
- 2133 Delany, M.F. 1990. *Late summer diet of juvenile American alligators*. Journal of Herpetology 24:418-421.
- 2134 Delany, M.F. and C.L. Abercrombie. 1986. *American alligator food habits in north central Florida*. Journal
2135 of Wildlife Management 50:348-353.
- 2136 Department of the Army and SFWMD. 1994. *Project Cooperation Agreement between the Department of*
2137 *the Army and South Florida Water Management District for Construction of the Kissimmee River,*
2138 *Florida, Project*. Department of the Army, Washington, D.C. and South Florida Water
2139 Management District, West Palm Beach, FL. March 22, 1994.
- 2140 Fan, A. 1986. *A routing model for the upper Kissimmee Chain of Lakes*. Technical Publication 86-5,
2141 DRE-225. South Florida Water Management District, West Palm Beach, FL.
- 2142 Fletcher, R., C. Poli, E. Robertson, B. Jeffrey, S. Dudek, and B. Reichert. 2017. *Snail kite demography*
2143 *2016 annual report*. United States Geological Survey, Florida Cooperative Fish and Wildlife
2144 Research Unit, University of Florida, Gainesville, FL.
- 2145 Florida Department of Environmental Protection. 1998. *Lake Kissimmee State Park Unit Management*
2146 *Plan*. Florida Department of Environmental Protection, Tallahassee, FL.
- 2147 Florida Division of Administrative Hearings. 2006. *Association of Florida Community Developers, et al.*
2148 *versus Department of Environmental Protection, et. al.*, Division of Administrative Hearings Case
2149 Number 04-000880, Final Order February 24, 2006, affirmed 943 So. 2d 989 (Florida Fourth
2150 District Court of Appeals 2006). Available at: <https://www.doah.state.fl.us/ALJ/SearchDOAH>
2151 (search on Recommended Order Date 2/24/2006).
- 2152 Florida Game and Fresh Water Fish Commission. 1957. *Recommended Program for Kissimmee River*
2153 *Basin*. Florida Game and Fresh Water Fish Commission, Tallahassee, FL.
- 2154 Frederick, P.C. and M.W. Collopy. 1989a. *The role of predation in determining reproductive success of*
2155 *colonially nesting wading birds in the Florida Everglades*. The Condor 91:860-867.

- 2156 Frederick, P.C. and M.W. Collopy. 1989b. *Nesting success of five ciconiiform species in relation to water*
2157 *conditions in the Florida Everglades*. The Auk 106:625-634.
- 2158 FWC. 2003. *Florida's Breeding Bird Atlas: A Collaborative Study of Florida's Birdlife*. Florida Fish and
2159 Wildlife Conservation Commission.
- 2160 FWC. 2008. *Bald Eagle (Haliaeetus leucocephalus) Management Plan*. Florida Fish and Wildlife
2161 Conservation Commission, Tallahassee, FL.
- 2162 FWC. 2013. *Florida's Threatened and Endangered Species*. Division of Habitat and Species Conservation,
2163 Florida Fish and Wildlife Conservation Commission, Tallahassee, FL.
- 2164 Gerking, S.D. 1994. *Feeding Ecology of Fish*. Academic Press, New York, NY.
- 2165 Gladden, J.E. and L.A. Smock. 1990. *Macroinvertebrate distribution and production on the floodplains of*
2166 *two lowland headwater streams*. Freshwater Biology 24:533-545.
- 2167 Goodwin, T.M. and W.R. Marion. 1978. *Aspects of the nesting ecology of American alligators (Alligator*
2168 *mississippiensis) in north-central Florida*. Herpetologica 34:43-47.
- 2169 Havens, K.E., D. Fox, S. Gornak, and C. Hanlon. 2005. *Aquatic vegetation and largemouth bass population*
2170 *responses to water-level variations in Lake Okeechobee, Florida (USA)*. Hydrobiologia
2171 539:225-237.
- 2172 Hill, N.M., P.A. Keddy, and I.C. Wisheu. 1998. *A hydrological model for predicting the effects of dams on*
2173 *shoreline vegetation of lakes and reservoirs*. Environmental Management 22:723-736.
- 2174 Holcomb, D. and W. Wegener. 1972. *Hydrophytic Changes Related to Lake Fluctuation as Measured by*
2175 *Point Transects*. Proceedings of Annual Conference of the Southeastern Conference of Game and
2176 Fish Commissioners 25:570-583.
- 2177 Hoyer, M.V. and D.E. Canfield Jr. 1990. *Limnological factors influencing bird abundance and species*
2178 *richness on Florida lakes*. Lake and Reservoir Management 6:132-141.
- 2179 Hoyer, M.V. and D.E. Canfield Jr. 1994. *Bird abundance and species richness on Florida lakes: Influence*
2180 *of trophic status, lake morphology, and aquatic macrophytes*. Hydrobiologia 297/280:107-119.
- 2181 Hulon, M., A. Furukawa, J. Buntz, J. Sweatman, and C. Mich. 1998. *Lake Jackson wildlife islands*.
2182 *Aquatics* 20:4-9.
- 2183 Johnson, K.G., M.S. Allen, and K.E. Havens. 2007. *A review of littoral vegetation, fisheries, and wildlife*
2184 *response to hydrologic variation at Lake Okeechobee*. Wetlands 27:110-126.
- 2185 Jordan, F. and A. Arrington. 2014. *Piscivore responses to enhancement of the channelized Kissimmee River,*
2186 *Florida, U.S.A*. Restoration Ecology 22(3):418-425.
- 2187 Junk, W.J., P.B. Bayley, and R.E. Sparks. 1989. *The flood pulse concept in river-floodplain systems,*
2188 *pp. 110-127. In: Proceedings of the International Large River Symposium, Canadian Special*
2189 *Publication of Fisheries and Aquatic Sciences*.

- 2190 Karr, J.R., K.D. Fausch, P.L. Andermeier, P.R. Yant, and I.J. Schlosser. 1986. *Assessing Biological*
2191 *Integrity in Running Waters: A Method and its Rationale*. Special Publication 5. Illinois Natural
2192 History Survey, Illinois Department of Natural Resources, Springfield, IL. September 1986.
- 2193 Karr, J.R., H. Stefan, A.C. Benke, R.E. Sparks, M.W. Weller, J.V. McArthur, and J.H. Zar. 1992. *Design*
2194 *of a Restoration Evaluation Program*. South Florida Water Management District, West Palm
2195 Beach, FL.
- 2196 Keddy, P.A. 2000. *Wetland Ecology: Principles and Conservation*. Cambridge University Press,
2197 Cambridge, UK.
- 2198 Keddy, P. and L.H. Fraser. 2000. *Four general principles for the management of conservation of wetlands*
2199 *in large lakes: The role of water levels, nutrients, competitive hierarchies and centrifugal*
2200 *organization*. Lake & Reservoir: Research and Management 5:177-185.
- 2201 Koebel, J.W., Jr. 1995. *A Historical Perspective on the Kissimmee River Restoration Project*. Restoration
2202 Ecology 3:149-159.
- 2203 Koebel, J.W. and S. Bousquin. 2014. *The Kissimmee River Restoration Project and Evaluation Program,*
2204 *Florida, U.S.A.* Restoration Ecology 22(3):345-352.
- 2205 Koebel, J.W., S.G. Bousquin, and J. Colee. 2014. *Interim responses of benthic and snag-dwelling*
2206 *macroinvertebrates to reestablished flow and habitat structure in the Kissimmee River, Florida,*
2207 *U.S.A.* Restoration Ecology 22(3):409-417.
- 2208 Koebel, J.W., Jr., S.G. Bousquin, D.H. Anderson, Z. Welch, M.D. Cheek, H. Chen, R.T. James, J. Zhang,
2209 B. Anderson, R. Baird, T. Beck, A. Brunell, D. Colangelo, T. Coughlin, K. Lawrence, and
2210 C. Mallison. 2016. *Chapter 9: Kissimmee River Restoration and Basin Initiatives*. In: 2016 South
2211 Florida Environmental Report – Volume I. South Florida Water Management District, West Palm
2212 Beach, FL.
- 2213 Koebel, J.W., Jr., S.G. Bousquin, D.H. Anderson, M.D. Cheek, C. Carroll, H. Chen, C. Hanlon, Z. Welch,
2214 B. Anderson, L. Spencer, T. Beck, and A. Brunell. 2019. *Chapter 9: Kissimmee River Restoration*
2215 *and Basin Initiatives*. In: 2019 South Florida Environmental Report – Volume I. South Florida
2216 Water Management District, West Palm Beach, FL.
- 2217 Koebel, J.W., S.G. Bousquin, D.H. Anderson, M.D. Cheek, C. Carroll, H. Chen, B. Anderson, T. Beck, and
2218 A. Brunell. 2020. *Chapter 9: Kissimmee River Restoration and Basin Initiatives*. In: 2020 South
2219 Florida Environmental Report – Volume I. South Florida Water Management District, West Palm
2220 Beach, FL.
- 2221 Loftin, M.K., L.A. Toth, and J.T.B. Obeysekera (eds.). 1990a. *Proceedings of the Kissimmee River*
2222 *Restoration Symposium, October 1988, Orlando, Florida*. South Florida Water Management
2223 District, West Palm Beach, FL.
- 2224 Loftin, M.K., L.A. Toth, and J.T.B. Obeysekera. 1990b. *Kissimmee River Restoration Alternative Plan*
2225 *Evaluation and Preliminary Design Report*. South Florida Water Management District, West Palm
2226 Beach, FL.

- 2227 Loucks, D.P., D.A. Chin, and R.H. Prucha. 2008. *Kissimmee Basin Modeling and Operations Study – Peer*
 2228 *Review Panel Task 3 Report*. Submitted to South Florida Water Management District, West Palm
 2229 Beach, FL.
- 2230 Mallison, C. 2009. Kissimmee Chain of Lakes. Using: ArcGIS. Redlands, CA: Environmental Systems
 2231 Research Institute, Inc.
- 2232 Mallison, C. 2016. Kissimmee Chain of Lakes. Using: ArcGIS. Redlands, CA: Environmental Systems
 2233 Research Institute, Inc.
- 2234 McEwan, L.C. and D.H. Hirth. 1980. *Food habits of the bald eagle in north-central Florida*. The Condor
 2235 82:229-231.
- 2236 Miller, S.J. 1990. *Kissimmee River Fisheries – A Historical Perspective*, pp. 31-42. In: M.K. Loftin,
 2237 L.A. Toth, and J. Obeysekera (eds.), *Proceedings of the Kissimmee River Restoration Symposium*,
 2238 October 1988, Orlando, Florida. South Florida Water Management District, West Palm Beach, FL.
- 2239 Moyer, E.J., M.W. Hulon, R.S. Butler, D.C. Arwood, C. Michael, and C.A. Harris. 1987. *State of Florida*
 2240 *Game and Fresh Water Fish Commission 1987 Kissimmee Chain of Lakes Studies Completion*
 2241 *Report for Study No. 1 Lake Tohopekaliga Investigations*. Florida Game and Freshwater Fish
 2242 Commission, Tallahassee, FL.
- 2243 Muench, A.M. 2004. *Aquatic Vertebrate Usage of Littoral Habitat Prior to Extreme Habitat Modification*
 2244 *in Lake Tohopekaliga, Florida*. Master of Science thesis, University of Florida, Gainesville, FL.
- 2245 National Audubon Society. 1936-1959. *Audubon Warden Field Reports*. Everglades National Park, South
 2246 Florida Research Center, Homestead, FL.
- 2247 Newsom, J.D., T. Joanen, and R.J. Howard. 1987. *Habitat Suitability Index Models: American Alligator*.
 2248 Biological Report 82(10.136). United States Fish and Wildlife Service, United States Department
 2249 of the Interior, Lafayette, LA.
- 2250 Perrin, L.S., M.J. Allen, L.A. Rowse, F. Montalbano, K.J. Foote, and M.W. Olinde. 1982. *A Report on Fish*
 2251 *and Wildlife Studies in the Kissimmee River Basin and Recommendations for Restoration*. Florida
 2252 Fish and Wildlife Conservation Commission, Okeechobee, FL.
- 2253 Poff, N.L. and J.D. Allan. 1995. *Functional organization of stream fish assemblages in relation to*
 2254 *hydrologic variability*. Ecology 76:606-627.
- 2255 Poff, N.L., J.D. Allen, M.B. Bain, J.R. Karr, K.L. Prestegard, B.D. Richter, R.E. Sparks, and
 2256 J.C. Stromberg. 1997. *The natural flow regime: A paradigm for river conservation and restoration*.
 2257 Bioscience 47:769-784.
- 2258 Poole, A. (ed.). 2008. *The Birds of North America Online*. Cornell Lab of Ornithology, Ithaca, NY.
 2259 Available online at <http://bna.birds.cornell.edu.bnaproxy.birds.cornell.edu/bna>.
- 2260 Pranty, B. 2002. *The Important Bird Areas of Florida: 2000–2002*. Audubon of Florida. Available online
 2261 at <http://www.audubon.org/bird/iba/florida>.
- 2262 Preble, G.H. 1945. *A canoe expedition into the Everglades in 1842*. Tequesta 5(1945):30-51.

- 2263 Reese, R. and E. Richardson. 2008. *Synthesis of the Hydrogeologic Framework of the Floridan Aquifer*
2264 *System and Delineation of a Major Avon Park Permeable Zone in Central and Southern Florida.*
2265 Scientific Investigation Report 2007-5207. United States Geological Survey, Washington, D.C.
- 2266 Savino, J.F. and R.A. Stein. 1982. *Predator-prey interactions between largemouth bass and bluegills as*
2267 *influenced by simulated, submersed vegetation.* Transactions of the American Fisheries Society
2268 111:255-347.
- 2269 Scheaffer, W.A. and J.G. Nickum. 1986. *Backwater areas as nursery habitats for fishes in Pool 13 of the*
2270 *Upper Mississippi River.* Hydrobiologia 136:131-140.
- 2271 SFWMD. 2000. *Kissimmee Basin Water Supply Plan.* South Florida Water Management District, West
2272 Palm Beach, FL.
- 2273 SFWMD. 2007. *2005–2006 Kissimmee Basin Water Supply Plan Update.* Water Supply Department, South
2274 Florida Water Management District, West Palm Beach, FL.
- 2275 SFWMD. 2008. *Lower East Coast Water Supply Plan – 2008.* Final Order on Amendment to Appendix H.
2276 South Florida Water Management District, West Palm Beach, FL.
- 2277 SFWMD. 2009. *Technical Document to Support Water Reservations for the Kissimmee River and Chain of*
2278 *Lakes-Draft for Scientific Peer Review Panel.* South Florida Water Management District, West
2279 Palm Beach, FL.
- 2280 SFWMD. 2015a. *Technical Document to Support Water Reservations for the Kissimmee River and Chain*
2281 *of Lakes-DRAFT.* South Florida Water Management District, West Palm Beach, FL. March 2015.
- 2282 SFWMD. 2015b. *Applicant’s Handbook for Water Use Permit Applications within the South Florida Water*
2283 *Management District.* South Florida Water Management District, West Palm Beach, FL.
2284 September 7, 2015.
- 2285 SFWMD. 2018. *2018 Lower East Coast Water Supply Plan Update.* South Florida Water Management
2286 District, West Palm Beach, FL.
- 2287 SFWMD. 2019. *2019 South Florida Environmental Report, Volume 1, Chapter 8B.* South Florida Water
2288 Management District, West Palm Beach, FL.
- 2289 Shaw, J.E. and S.M. Trost. 1984. *Hydrogeology of the Kissimmee Planning Area, South Florida Water*
2290 *Management District.* Technical Publication 84-1 (DRE-188). South Florida Water Management
2291 District, West Palm Beach, FL.
- 2292 Snyder, N.F.R., S.R. Beissinger, and R.E. Chandler. Reproduction and demography of the Florida
2293 Everglade (snail) kite. 1989. The Condor 91:300-316.
- 2294 Spencer, L. and S. Bousquin. 2014. *Interim responses of floodplain wetland vegetation to Phase I of the*
2295 *Kissimmee River Restoration Project: Comparisons of vegetation maps from five periods in the*
2296 *river’s history.* Restoration Ecology 22(3):397-408.
- 2297 Stuber, R.J., G. Gebhart, and O.E. Maughan. 1982a. *Habitat Suitability Index Models: Bluegill.*
2298 FWS/OBS-82/10.8. United States Fish and Wildlife Service, Washington, D.C.

- 2299 Stuber, R.J., G. Gebhart, and O.E. Maughan. 1982b. *Habitat Suitability Index Models: Largemouth Bass*.
2300 FWS/OBS-82/10.16. United States Fish and Wildlife Service, Washington, D.C.
- 2301 Stys, B. 1997. *Ecology of the Florida Sandhill Crane*. Nongame Wildlife Technical Report Number 15.
2302 Florida Game and Freshwater Fish Commission, Tallahassee, FL.
- 2303 Sykes, P.W., Jr., J.A. Rodgers Jr., and R.E. Bennetts. 1995. *Snail Kite* (*Rostrhamus sociabilis*). In: A. Poole
2304 (ed.), *The Birds of North America Online*. Cornell Lab of Ornithology, Ithaca, NY. Available
2305 online at <http://bna.birds.cornell.edu.bnaproxy.birds.cornell.edu/bna/species/171>.
- 2306 Tacha, T.C., S.A. Nesbit, and P.A. Vohs. 1992. *Sandhill Crane. Number 31*. In: A. Poole, P. Stettenheim,
2307 and F. Gills (eds.), *The Birds of North America*. Academy of Natural Sciences, Philadelphia, PA
2308 and American Ornithologists' Union, Washington, D.C.
- 2309 Tarboton, K.M., M.M. Irizarry-Ortiz, D.P. Loucks, S.M. Davis, and J.T. Obeysekera. 2004. *Habitat*
2310 *Suitability Indices for Evaluating Water Management Alternatives*. South Florida Water
2311 Management District. West Palm Beach, FL.
- 2312 Tennant, A. 1997. *A Field Guide to the Snakes of Florida*. Gulf Publishing Company, Houston, TX.
- 2313 Toland, B. 1999. *Nesting success and productivity of Florida sandhill cranes on natural and developed*
2314 *sites in southeast Florida*. Florida Field Naturalist 27:10-13.
- 2315 Toth, L.A. 1990. *Impacts of Channelization on the Kissimmee River Ecosystem*, pp. 47-56. In: M.K. Loftin,
2316 L.A. Toth, and J. Obeysekera (eds.), *Proceedings of the Kissimmee River Restoration Symposium*,
2317 October 1988, Orlando, Florida. South Florida Water Management District, West Palm Beach, FL.
- 2318 Toth, L.A. 1991. *Environmental Responses to the Kissimmee River Demonstration Project*. Technical
2319 Publication 91-02. South Florida Water Management District, West Palm Beach, FL.
- 2320 Toth, L.A. 1993. *The ecological basis of the Kissimmee River Restoration Plan*. Florida Scientist 56:25-51.
- 2321 Toth, L.A., D.A. Arrington, M.A. Brady, and D.A. Muszick. 1995. *Conceptual evaluation of factors*
2322 *potentially affecting restoration of habitat structure within the channelized Kissimmee River*
2323 *ecosystem*. Restoration Ecology 3:160-180.
- 2324 Toth, L.A., J.W. Koebel Jr., A.G. Warne, and J. Chamberlain. 2002. *Chapter 6: Implications of*
2325 *Reestablishing Prolonged Flood Pulse Characteristics of the Kissimmee River and Floodplain*
2326 *Ecosystem*, pp. 191-221. In: B.A. Middleton (ed.), *Flood Pulsing in Wetlands: Restoring the*
2327 *Natural Hydrological Balance*. John Wiley & Sons, Inc., New York, NY.
- 2328 Trexler, J.C. 1995. *Restoration of the Kissimmee River: A conceptual model of past and present fish*
2329 *communities and its consequences for evaluating restoration success*. Restoration Ecology
2330 3:195-210.
- 2331 Turner, R.L. 1996. *Use of stems of emergent vegetation for oviposition by the Florida apple snail* (*Pomacea*
2332 *paludosa*), *and implications for marsh management*. Florida Scientist 59:34-49.
- 2333 USACE. 1985. *Central and Southern Florida, Kissimmee River, Florida Final Feasibility Report and*
2334 *Environmental Impact Statement*. United States Army Corps of Engineers, Jacksonville, FL.

- 2335 USACE. 1991. *Central and Southern Florida Project Final Integrated Feasibility Report and*
2336 *Environmental Impact Statement Environmental Restoration Kissimmee River, Florida*. United
2337 States Army Corps of Engineers, Jacksonville, FL. December 1991.
- 2338 USACE. 1994. *Master Water Control Manual for the Kissimmee River - Lake Istokpoga Basin (Draft)*.
2339 United States Army Corps of Engineers, Jacksonville, FL.
- 2340 USACE. 1996. *Central and Southern Florida Project Kissimmee River Headwaters Revitalization Project*
2341 *Integrated Project Modification Report and Supplement to the Final Environmental Impact*
2342 *Statement*. United States Army Corps of Engineers, Jacksonville, FL. January 1996.
- 2343 USFWS. 1958. *A Detailed Report of the Fish and Wildlife Resources in Relation to the Corps of Engineers'*
2344 *Plan of Development Kissimmee River Basin, Florida*. United States Fish and Wildlife Service,
2345 Vero Beach, FL.
- 2346 USFWS. 1994. *Fish and Wildlife Coordination Act Report on Kissimmee Headwater Lakes Revitalization*
2347 *Plan*. United States Fish and Wildlife Service, Washington, D.C.
- 2348 USFWS. 1999. *South Florida multi-species recovery plan*. Atlanta, Georgia, USA: United States Fish and
2349 Wildlife Service, Washington, D.C.
- 2350 USFWS. 2002. *2001 National Survey of Fishing, Hunting, and Wildlife-associated Recreation: National*
2351 *Overview*. United States Fish and Wildlife Service, Washington, D.C.
- 2352 Warne, A.G., L.A. Toth, and W.A White. 2000. *Drainage-basin-scale Geomorphic Analysis to Determine*
2353 *Reference Conditions for Ecological Restoration – Kissimmee River, Florida*. GSA Bulletin
2354 112:884-899.
- 2355 Welch, Z.C. 2004. *Littoral Vegetation of Lake Tohopekaliga: Community Descriptions Prior to a Large-*
2356 *scale Fisheries Habitat-enrichment Project*. Master of Science Thesis, University of Florida,
2357 Gainesville, FL.
- 2358 Welcomme, R.L. 1979. *Fisheries Ecology of Floodplain Rivers*. Longman Group Limited, London, United
2359 Kingdom.
- 2360 Welcomme, R.L. and D. Hagborg. 1977. *Towards a model of a floodplain fish population and its fishery*.
2361 *Environmental Biology of Fishes* 2:7-24.
- 2362 Weller, M.W. 1995. *Use of two waterbird guilds as evaluation tools for the Kissimmee River restoration*.
2363 *Restoration Ecology* 3:211-224.
- 2364 White, W.A. 1970. *The Geomorphology of the Florida Peninsula*. Geological Bulletin No. 51. Florida
2365 Department of Natural Resources, Tallahassee, FL.
- 2366 White, L., P.C. Frederick, M.B. Main, and J.A. Rodgers Jr. 2005. *Nesting Island Creation for Wading Birds*.
2367 Circular 1473. Wildlife Ecology and Conservation Department, Florida Cooperative Extension
2368 Service, Institute of Food and Agricultural Sciences, University of Florida, Gainesville, FL.
- 2369 Wilcox, D.A. and S.J. Nichols. 2008. *The effects of water-level fluctuations on vegetation in a Lake Huron*
2370 *wetland*. *Wetlands* 28(2):487-501.

- 2371 Williams, L.E., Jr. 1978. *Florida Sandhill Crane*, pp. 36-37. In: H.W. Kale, II (ed.), Rare and Endangered
2372 Biota of Florida, Volume 2: Birds.
- 2373 Williams, G.E. and S.L. Melvin. 2005. *Expectation 24: Density of Long-legged Wading Birds on the*
2374 *Floodplain*. In: D.H. Anderson, S.G. Bousquin, G.E. Williams, and D.J. Colangelo (eds.),
2375 Kissimmee River Restoration Studies, Volume II, Defining Success: Expectations for the
2376 Kissimmee River Restoration. Technical Publication ERA 433. South Florida Water Management
2377 District, West Palm Beach, FL.
- 2378 Williams, V.P., D.E. Canfield Jr, M.M. Hale, W.E. Johnson, R.S. Kautz, J.T. Krummrich, F.H. Langford,
2379 K. Langland, S.P. McKinney, D.M. Powell, and P.L. Shafland. 1985. *Lake Habitats and Fishery*
2380 *Resources of Florida*, pp. 43-119. In: W. Seaman Jr. (ed.), Florida Aquatic Habitat and Fishery
2381 Resources. Florida Chapter of the American Fisheries Society, Eustis, FL.
- 2382 Winemiller, K.O. and D.B. Jepsen. 1998. *Effects of seasonality and fish movement on tropical river food*
2383 *webs*. Journal of Fish Biology 53(Supplement A):267-296.
- 2384 Woodward, A.R., T.C. Hines, C.L. Abercrombie, and J.D. Nichols. 1987. *Survival of young American*
2385 *alligators on a Florida Lake*. Journal of Wildlife Management 51:931-937.
- 2386 Wulschleger, J.G., S.J. Miller, and L.J. Davis. 1990a. *An Evaluation of the Effects of the Restoration*
2387 *Demonstration Project on Kissimmee River Fishes*, pp. 67-81. In: M.K. Loftin, L.A. Toth, and
2388 J. Obeysekera (eds.), Proceedings of the Kissimmee River Restoration Symposium, October 1988,
2389 Orlando, Florida. South Florida Water Management District, West Palm Beach, FL.
- 2390 Wulschleger, J.G., S.J. Miller, and L.J. Davis. 1990b. *A Survey of Fish Communities in Kissimmee River*
2391 *Oxbows Scheduled for Phase II Restoration*, pp. 143-148. In: M.K. Loftin, L.A. Toth, and
2392 J. Obeysekera (eds.), Proceedings of the Kissimmee River Restoration Symposium, October 1988,
2393 Orlando, Florida. South Florida Water Management District, West Palm Beach, FL.
- 2394

APPENDIX A: WATER RESERVATION WATERBODIES AND CONTRIBUTING AREAS

For the proposed Kissimmee River and Chain of Lakes Water Reservations, a reservation waterbody contains the fish and wildlife protected by the Water Reservation rules, and is where fish and wildlife roost, feed and forage, breed and nest, or shelter. These needs were considered when determining the quantity of water needed to protect fish and wildlife in the Kissimmee River and Chain of Lakes.

Many reservation waterbodies are connected directly or indirectly to other natural or man-made surface waterbodies that contribute water to reservation waterbodies but are not considered reservation waterbodies themselves. Draft amendments to Rule 40E-10.021, Florida Administrative Code, define a contributing waterbody as “all wetlands and other surface waters, including canals and ditches, that contribute surface water to a reservation waterbody.” Contributing waterbodies continuously or intermittently provide water needed to maintain an adequate hydrologic regime for the protection of fish and wildlife in the reservation waterbodies to which they are connected.

This appendix lists (**Table A-1**) and depicts (**Figures A-1 through A-9**) the reservation and contributing waterbodies of the proposed Kissimmee River and Chain of Lakes Water Reservations. The waterbodies are further described and discussed in the main report and other appendices and in draft implementation rules for Section 3.11.5 of the *Applicant’s Handbook for Water Use Permit Applications within the South Florida Water Management District* (Applicant’s Handbook; SFWMD 2015) and Chapter 40E-10, Florida Administrative Code, that are pertinent to the Kissimmee River and Chain of Lakes Water Reservations. Other wetlands and surface waters not specifically included in the Kissimmee River and Chain of Lakes Water Reservations are protected to a “no harm” standard under Section 3.3 of the Applicant’s Handbook (SFWMD 2015).

Table A-1. Kissimmee River and Chain of Lakes Water Reservations waterbody list, as shown in **Figures A-1 through A-9**, sorted by watershed and map identification number.

Waterbody Number	Waterbody Name	Waterbody Type
Lakes Hart-Mary Jane		
1	Lake Whippoorwill	Reservation
2	Whippoorwill Canal	Reservation
3	Lake Hart	Reservation
4	C-29 Canal	Reservation
5	Lake Mary Jane	Reservation
6	C-29A Canal north of S-62	Reservation
7	C-30 Canal north of S-57	Reservation
Lake Myrtle-Preston-Joel		
8	C-30 Canal south of S-57	Reservation
9	Lake Myrtle	Reservation
10	Myrtle/Preston Canal	Reservation
11	Lake Preston	Reservation
12	C-32B Canal	Reservation
13	Lake Joel	Reservation
14	C-32C Canal north of S-58	Reservation

Appendix A: Water Reservation Waterbodies and Contributing Areas

Waterbody Number	Waterbody Name	Waterbody Type
East Lake Tohopekaliga		
15	C-29A Canal south of S-62	Reservation
16	Ajay Lake	Reservation
17	C-29B Canal	Reservation
18	Fells Cove	Reservation
19	Boggy Creek	Contributing
20	East Lake Tohopekaliga	Reservation
21	Runnymede Canal	Reservation
22	Lake Runnymede	Reservation
23	C-31 Canal northeast of S-59	Reservation
Lake Tohopekaliga		
24	C-31 Canal southwest of S-59	Reservation
25	Fish Lake	Contributing
26	Bass Slough	Contributing
27	Partin Canal	Contributing
28	Mill Slough	Contributing
29	East City Ditch	Contributing
30	West City Ditch	Contributing
31	Shingle Creek including Western Branch (West Shingle Creek)	Contributing
32	Lake Tohopekaliga	Reservation
33	WPA Canal	Contributing
34	Gator Bay Branch	Contributing
35	Fanny Bass Ditch	Contributing
36	Fanny Bass Pond	Contributing
37	Drawdy Bay Ditch	Contributing
Alligator Chain of Lakes		
38	C-33 Canal north of S-60	Reservation
39	Alligator Lake	Reservation
40	Brick Canal	Reservation
41	Brick Lake	Reservation
42	Buck Slough	Contributing
43	Buck Lake	Contributing
44	Live Oak Lake	Reservation
45	Live Oak Canal	Reservation
46	Sardine Lake	Reservation
47	Sardine Canal	Reservation
48	C-32G Canal	Reservation
49	Lake Lizzie	Reservation
50	C-32F Canal	Reservation
51	Lake Center	Reservation
52	Center-Coon Canal	Reservation
53	Coon Lake	Reservation
54	C-32D Canal	Reservation
55	Trout Lake	Reservation
56	C-32C Canal south of S-58	Reservation

Appendix A: Water Reservation Waterbodies and Contributing Areas


Waterbody Number	Waterbody Name	Waterbody Type
Lake Gentry		
57	C-34 Canal north of S-63	Reservation
58	Lake Gentry	Reservation
59	Big Bend Swamp	Contributing
60	Big Bend Swamp Canal/Gentry Ditch	Contributing
61	C-33 Canal south of S-60	Reservation
Headwaters Revitalization Lakes		
62	C-35 Canal south of S-61	Reservation
63	Cypress Lake	Reservation
64	C-34 Canal south of S-63A	Reservation
65	C-34 Canal north of S-63A	Reservation
66	Lake Russell	Contributing
67	Lower Reedy Creek south of REED40	Contributing
68	Upper Reedy Creek north of REED40	Contributing
69	Bonnet Creek	Contributing
70	C-36 Canal	Reservation
71	Lake Hatchineha	Reservation
72	Lake Marion Creek	Contributing
73	Lake Marion	Contributing
74	Catfish Creek	Contributing
75	Lake Pierce	Contributing
76	C-37 Canal	Reservation
77	Lake Kissimmee	Reservation
78	Zipprrer Canal east of G-103	Reservation
79	Zipprrer Canal west of G-103	Contributing
80	Lake Rosalie	Contributing
81	Weohyakapka Creek	Contributing
82	Lake Weohyakapka	Contributing
83	Tiger Lake	Reservation
84	Tiger Creek	Reservation
85	Otter Slough	Contributing
86	Jackson Canal south of G-111	Reservation
87	Jackson Canal north of G-111	Contributing
88	Lake Jackson	Contributing
89	Parker Hammock Slough	Contributing
90	Lake Marian	Contributing
91	Fodderstack Slough	Contributing
92	No Name Slough	Contributing
Kissimmee River Pool A*		
93	Buttermilk Slough	Contributing
94	Packingham Slough	Contributing
95	Ice Cream Slough	Contributing
96	Blanket Bay Slough	Contributing
97	Armstrong Slough	Contributing

Appendix A: Water Reservation Waterbodies and Contributing Areas

Waterbody Number	Waterbody Name	Waterbody Type
Kissimmee River Pool B/C/D*		
98	Tick Island Slough	Contributing
99	Pine Island Slough	Contributing
100	Sevenmile Slough	Contributing
101	Starvation Slough	Contributing
102	Oak Creek	Contributing
103	Ash Slough	Contributing
104	Gore Slough	Contributing
105	Fish Slough	Contributing
106	Cypress Slough	Contributing
107	Istokpoga Canal and floodplain east of S-67	Reservation
108	Istokpoga Creek west of S-67	Contributing
Kissimmee River Pool E*		
109	C-38 Canal and remnant river channels from S-65 to S-65E	Reservation
Kissimmee River Pools A-E*		
110	Kissimmee River and floodplain between S-65 and S-65D	Reservation

* Currently, the Kissimmee River is divided into three pools (A, B/C/D, and E) by a series of combined locks and spillways. The water level in each pool is regulated according to an interim regulation schedule.

2421 *Disclaimer: Features shown in the following figures are cartographic representations and do not supersede*
 2422 *legal descriptions or other regulatory criteria used to define such features on the ground.*

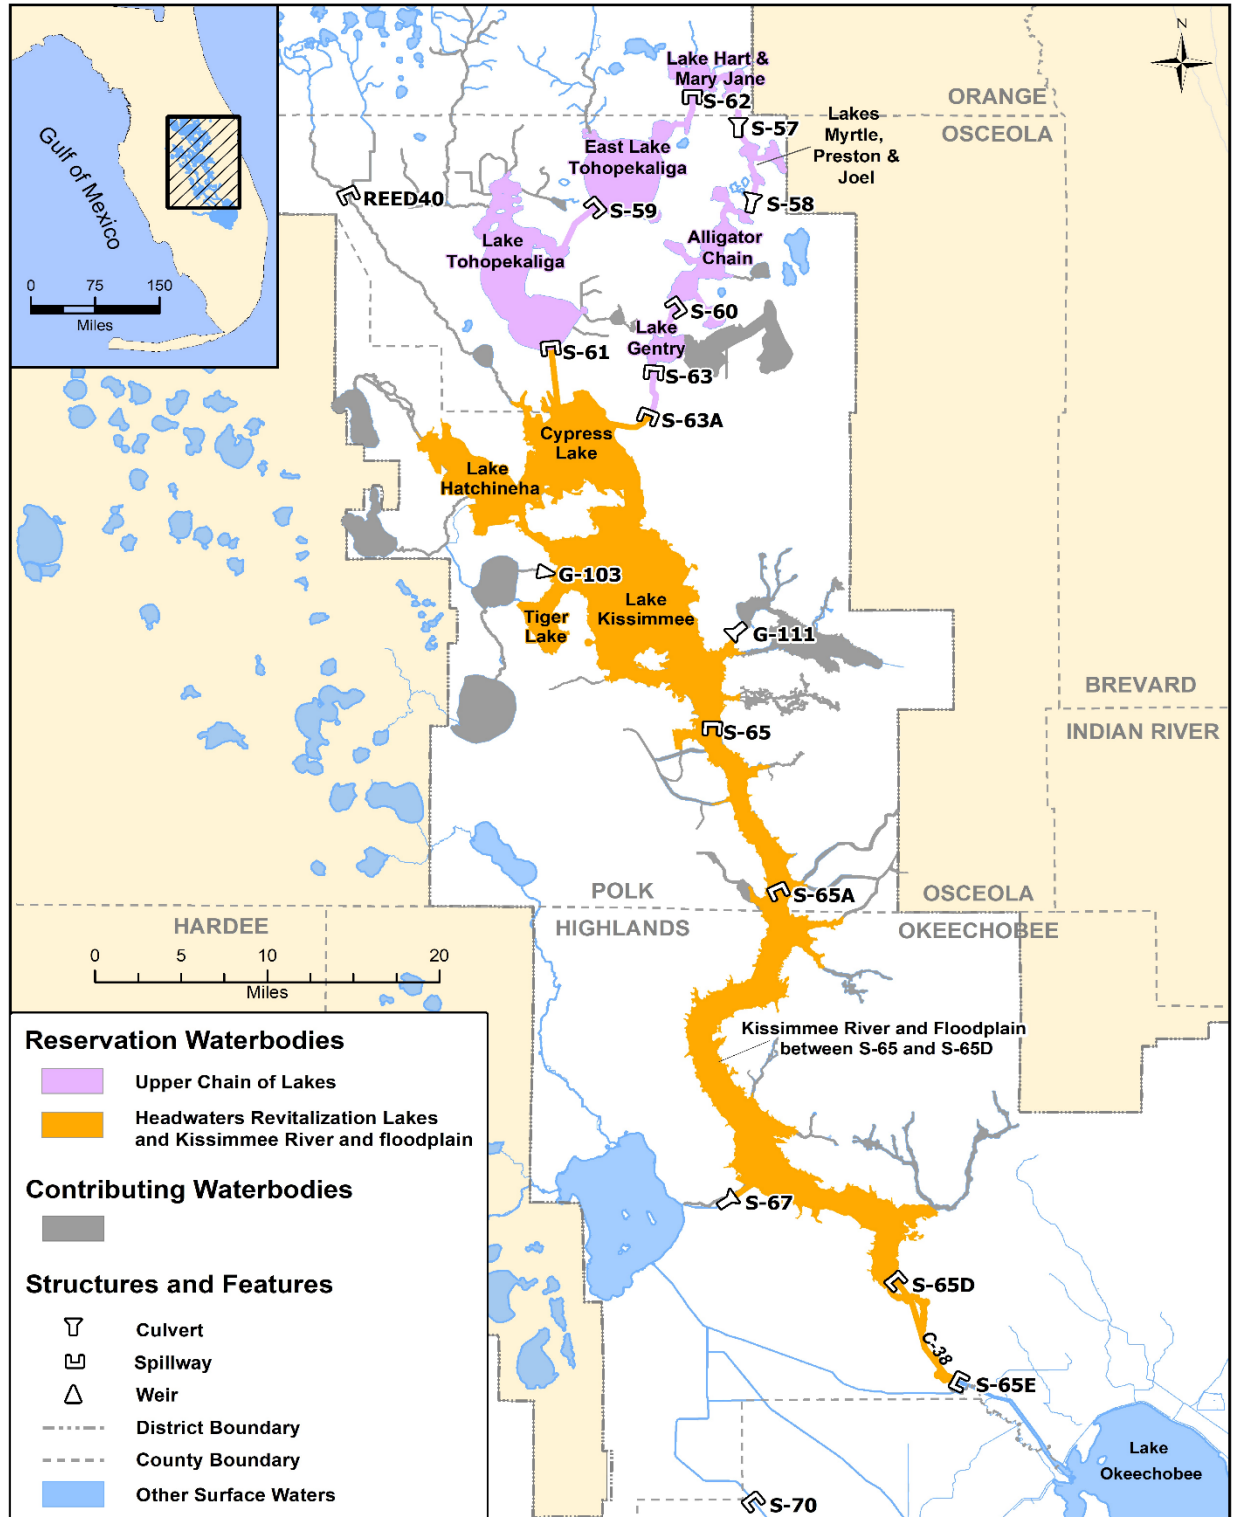

2423 Figure A-1. Kissimmee River and Chain of Lakes reservation and contributing waterbodies.
 2424

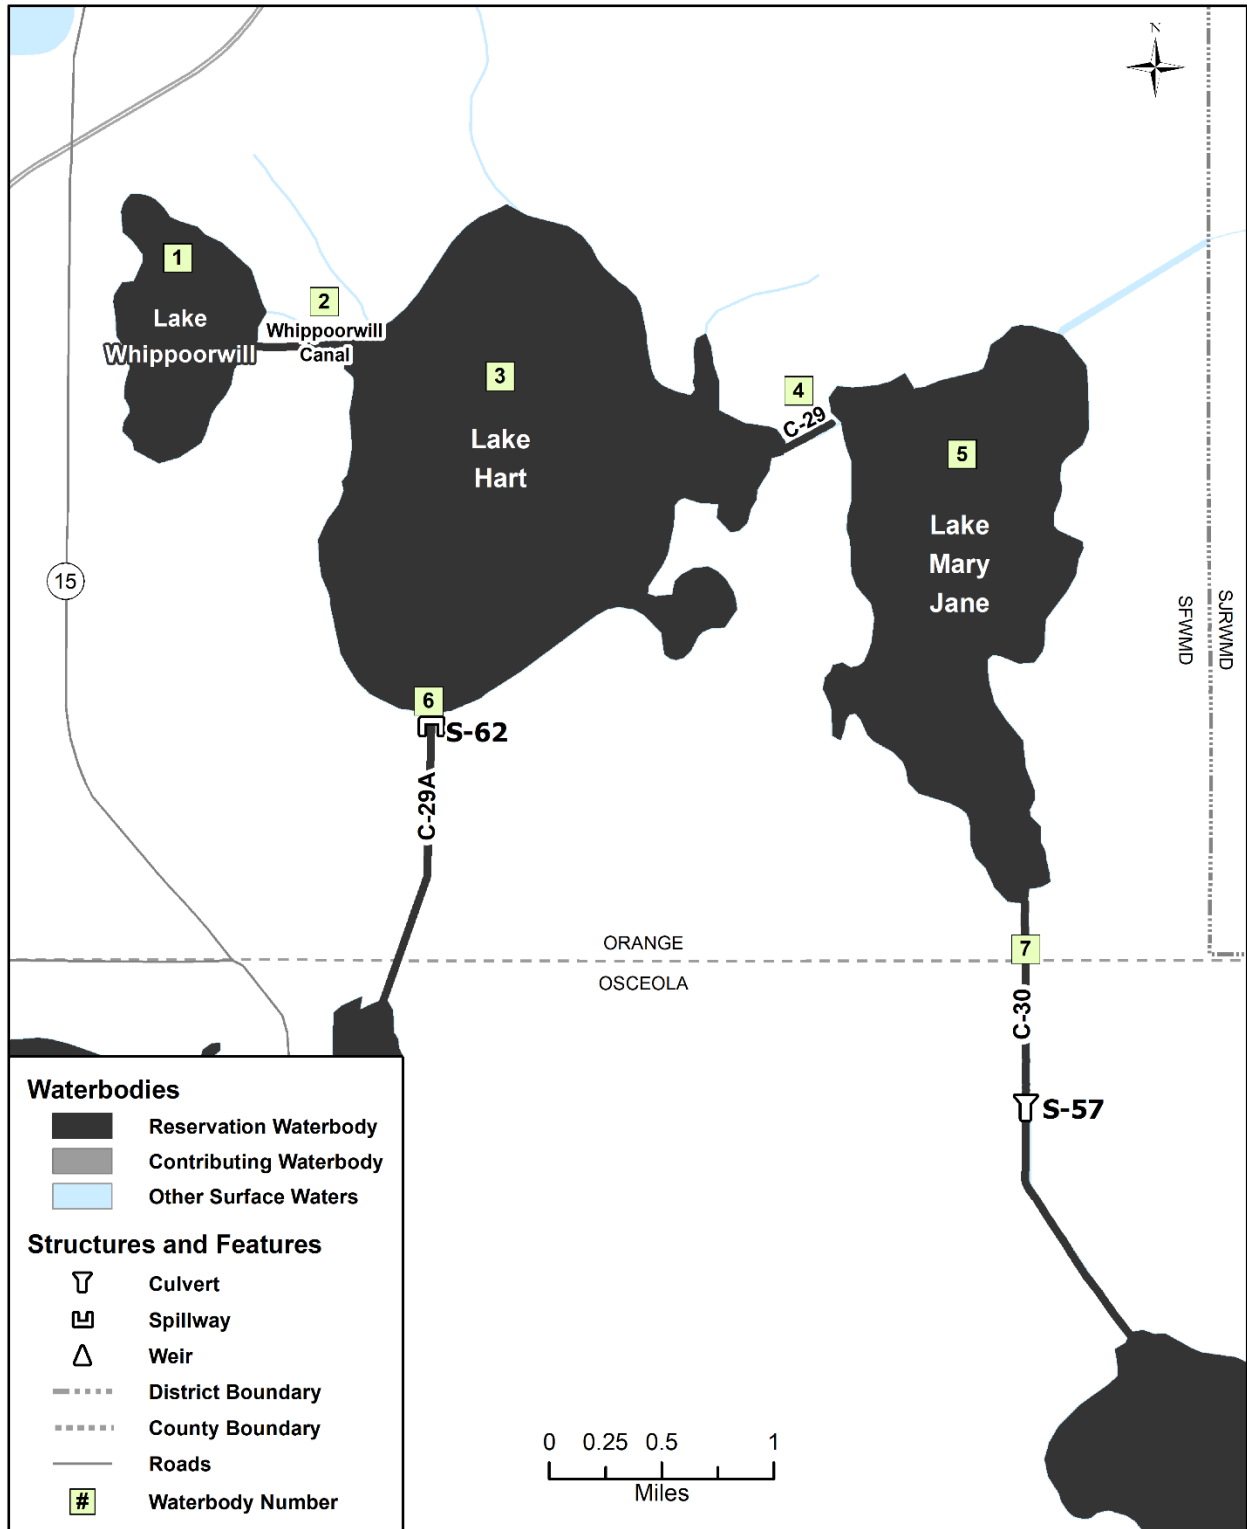


Figure A-2. Lakes Hart-Mary Jane reservation waterbodies (no contributing waterbodies present).

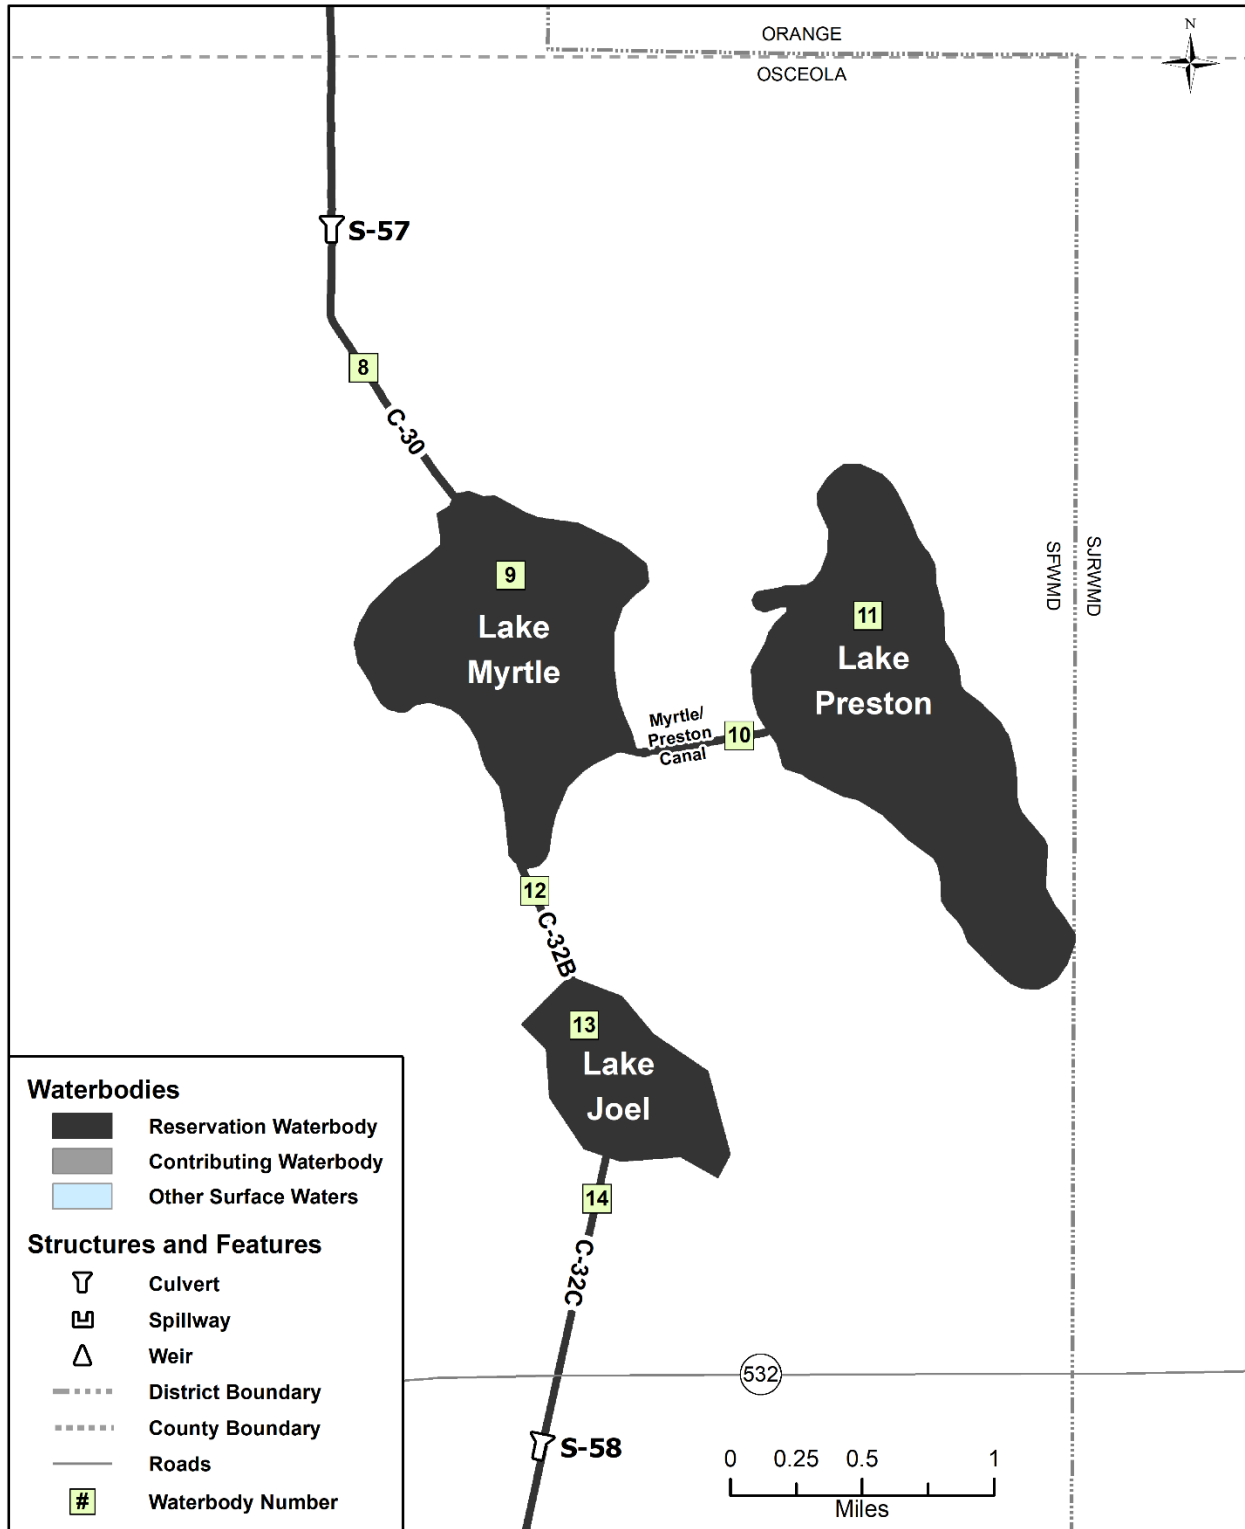


Figure A-3. Lakes Myrtle-Preston-Joel reservation waterbodies (no contributing waterbodies present).

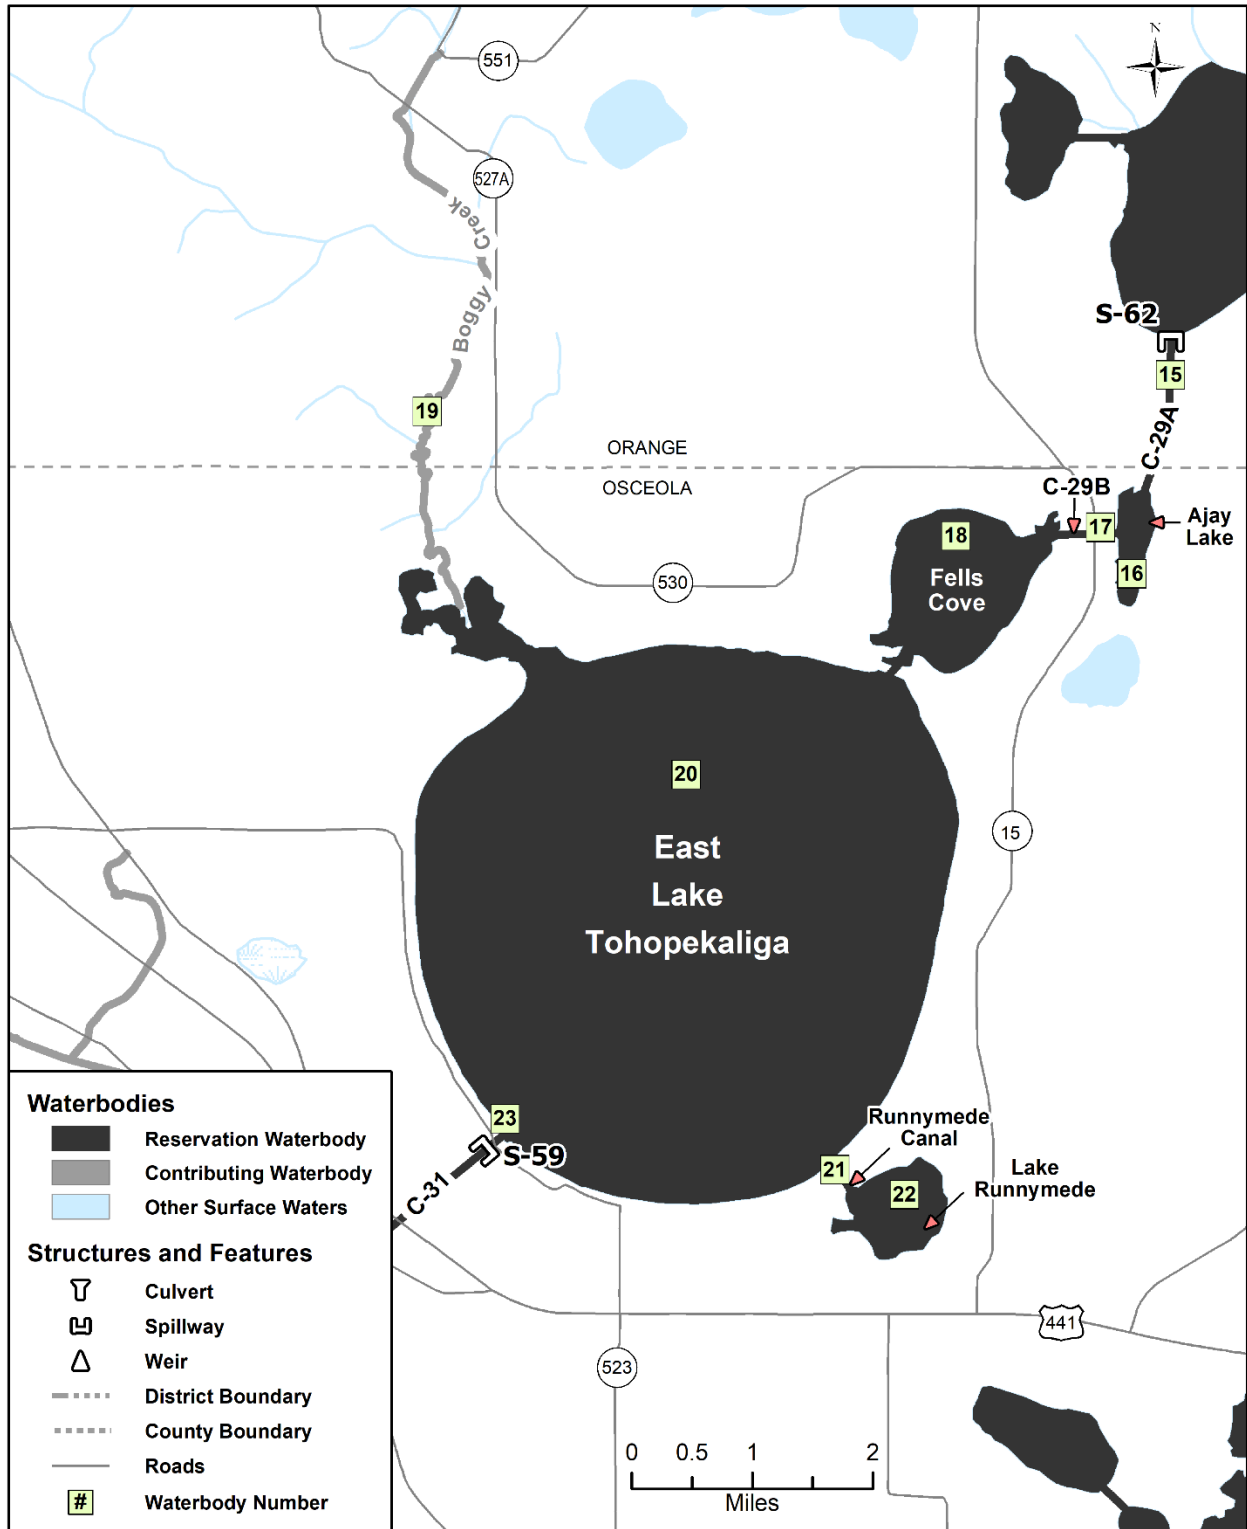


Figure A-4. East Lake Tohopekaliga reservation and contributing waterbodies.

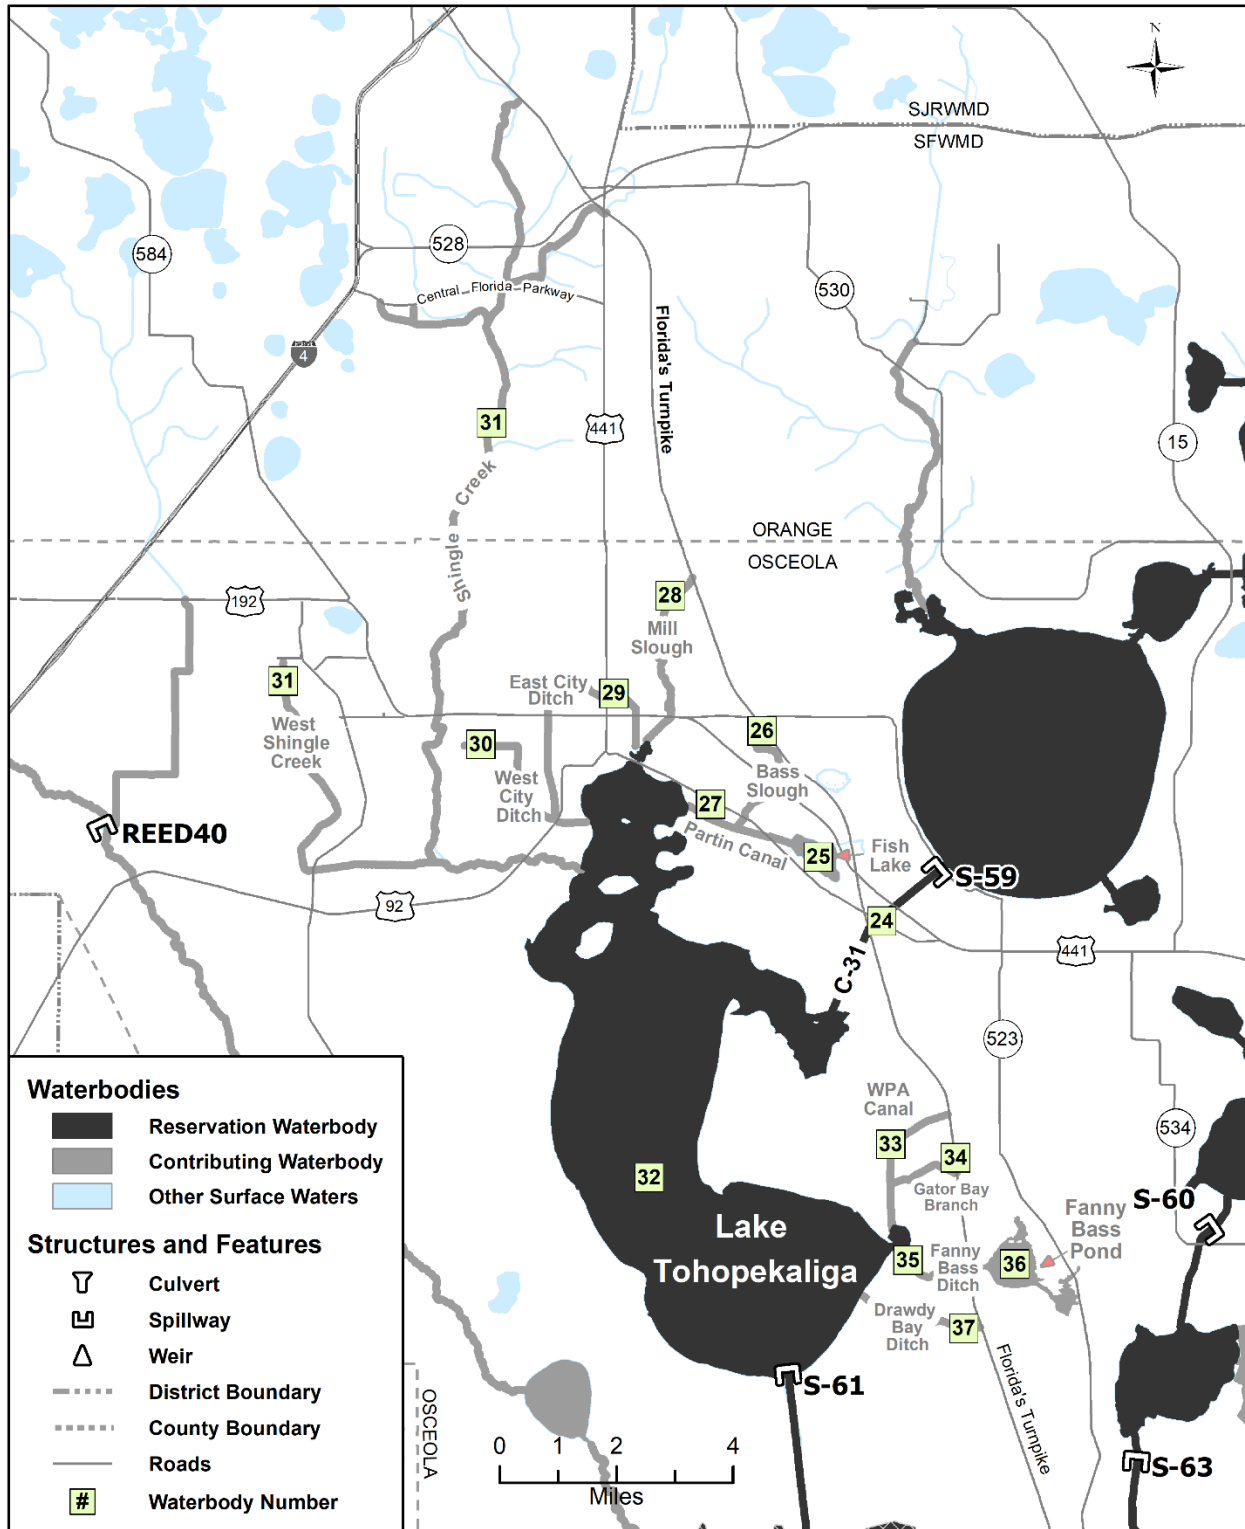


Figure A-5. Lake Tohopekaliga reservation and contributing waterbodies.

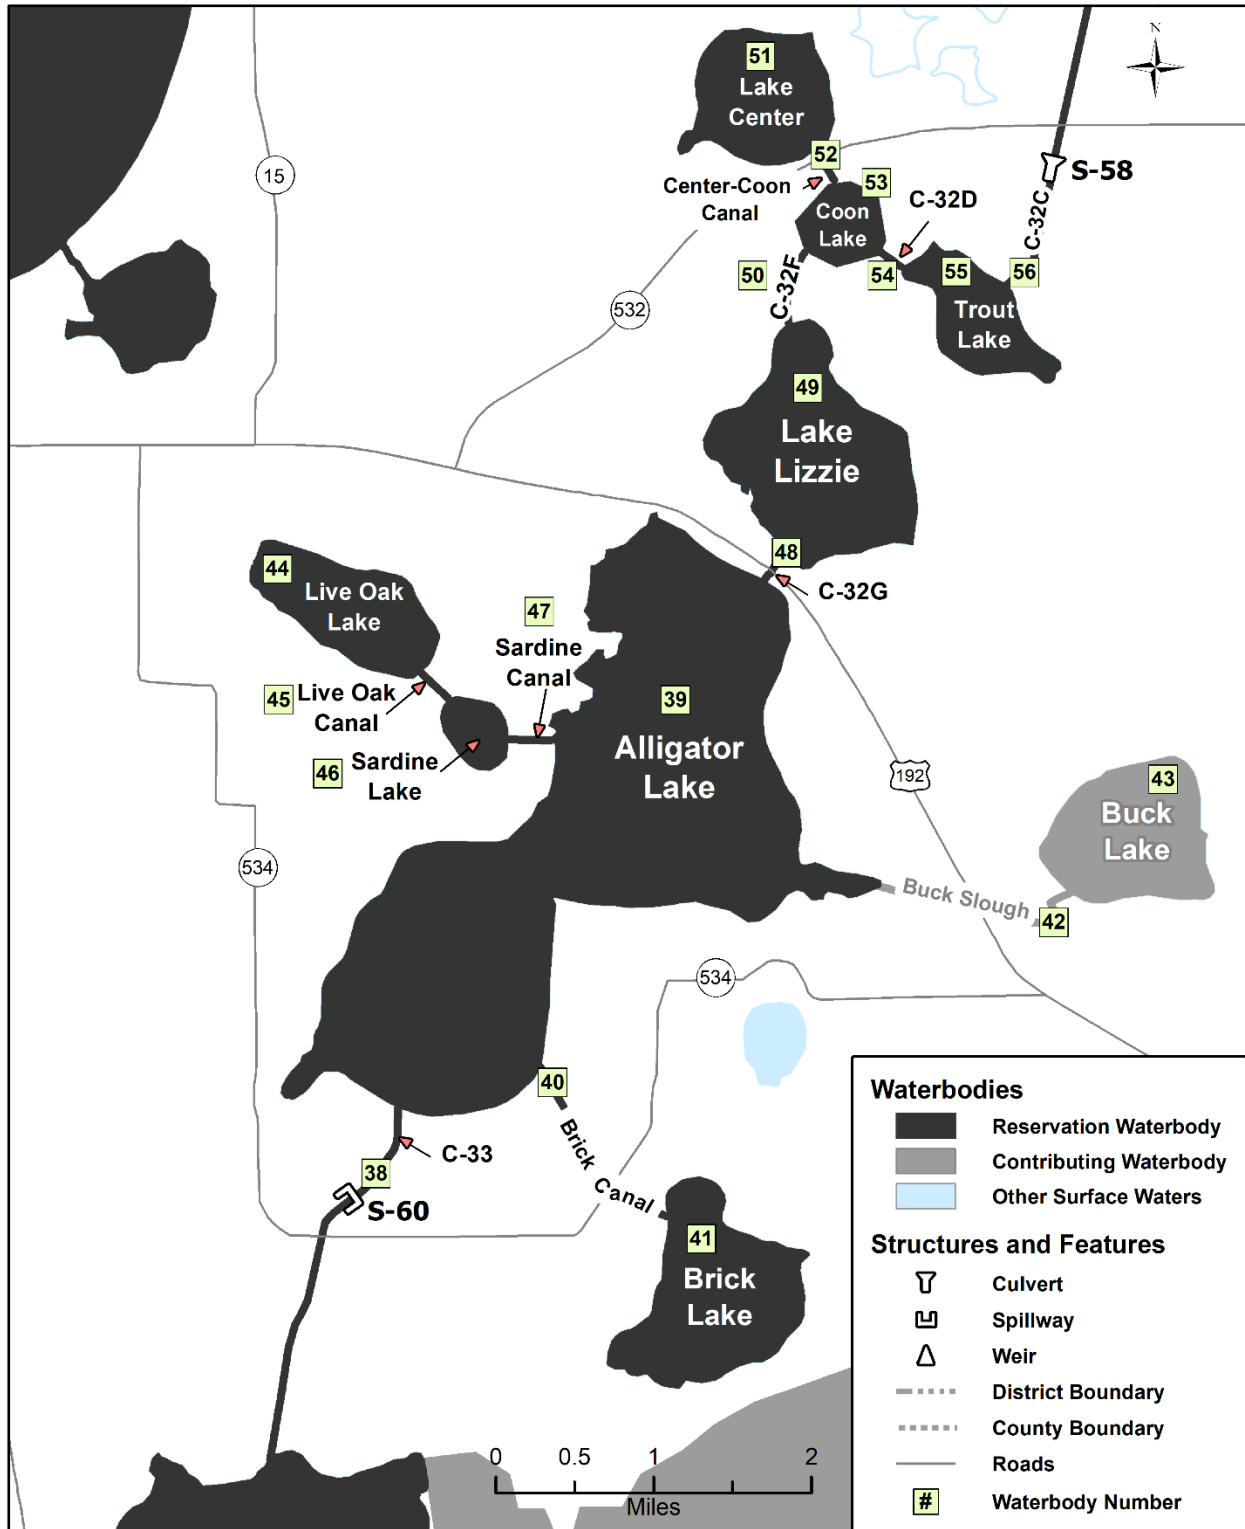


Figure A-6. Alligator Chain of Lakes reservation and contributing waterbodies.

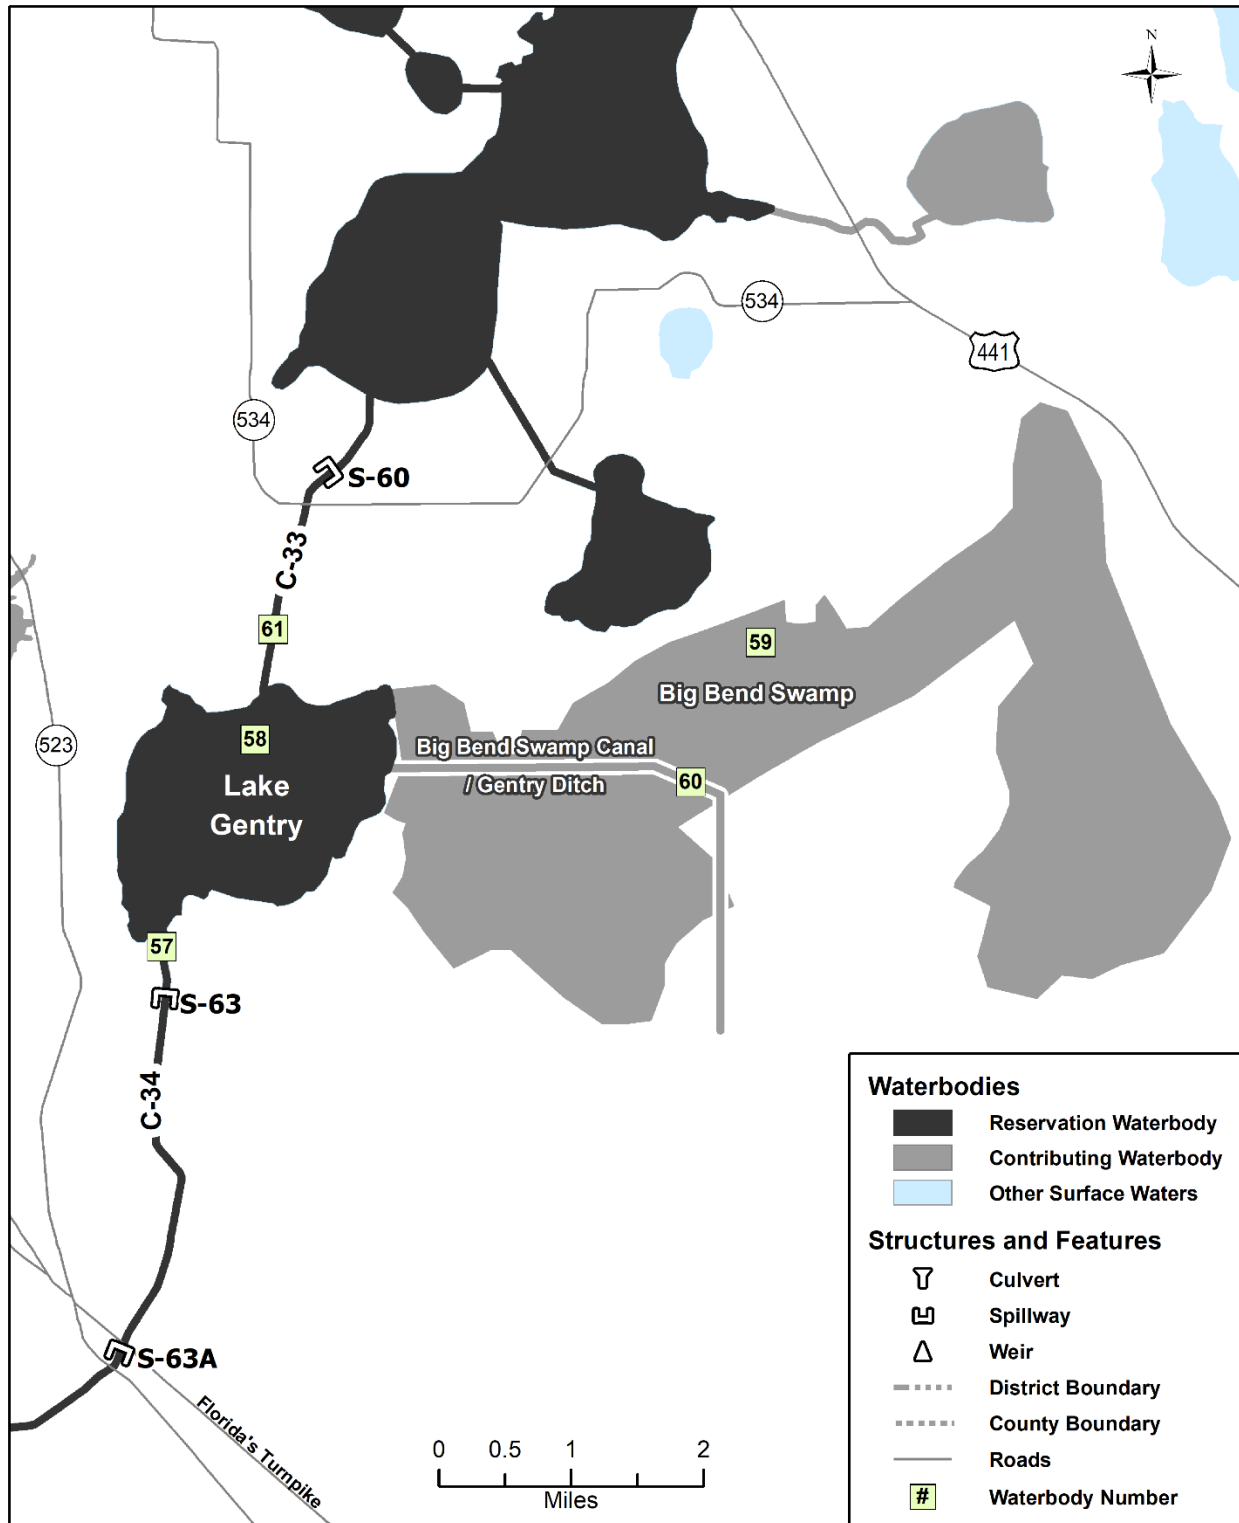


Figure A-7. Lake Gentry reservation and contributing waterbodies.

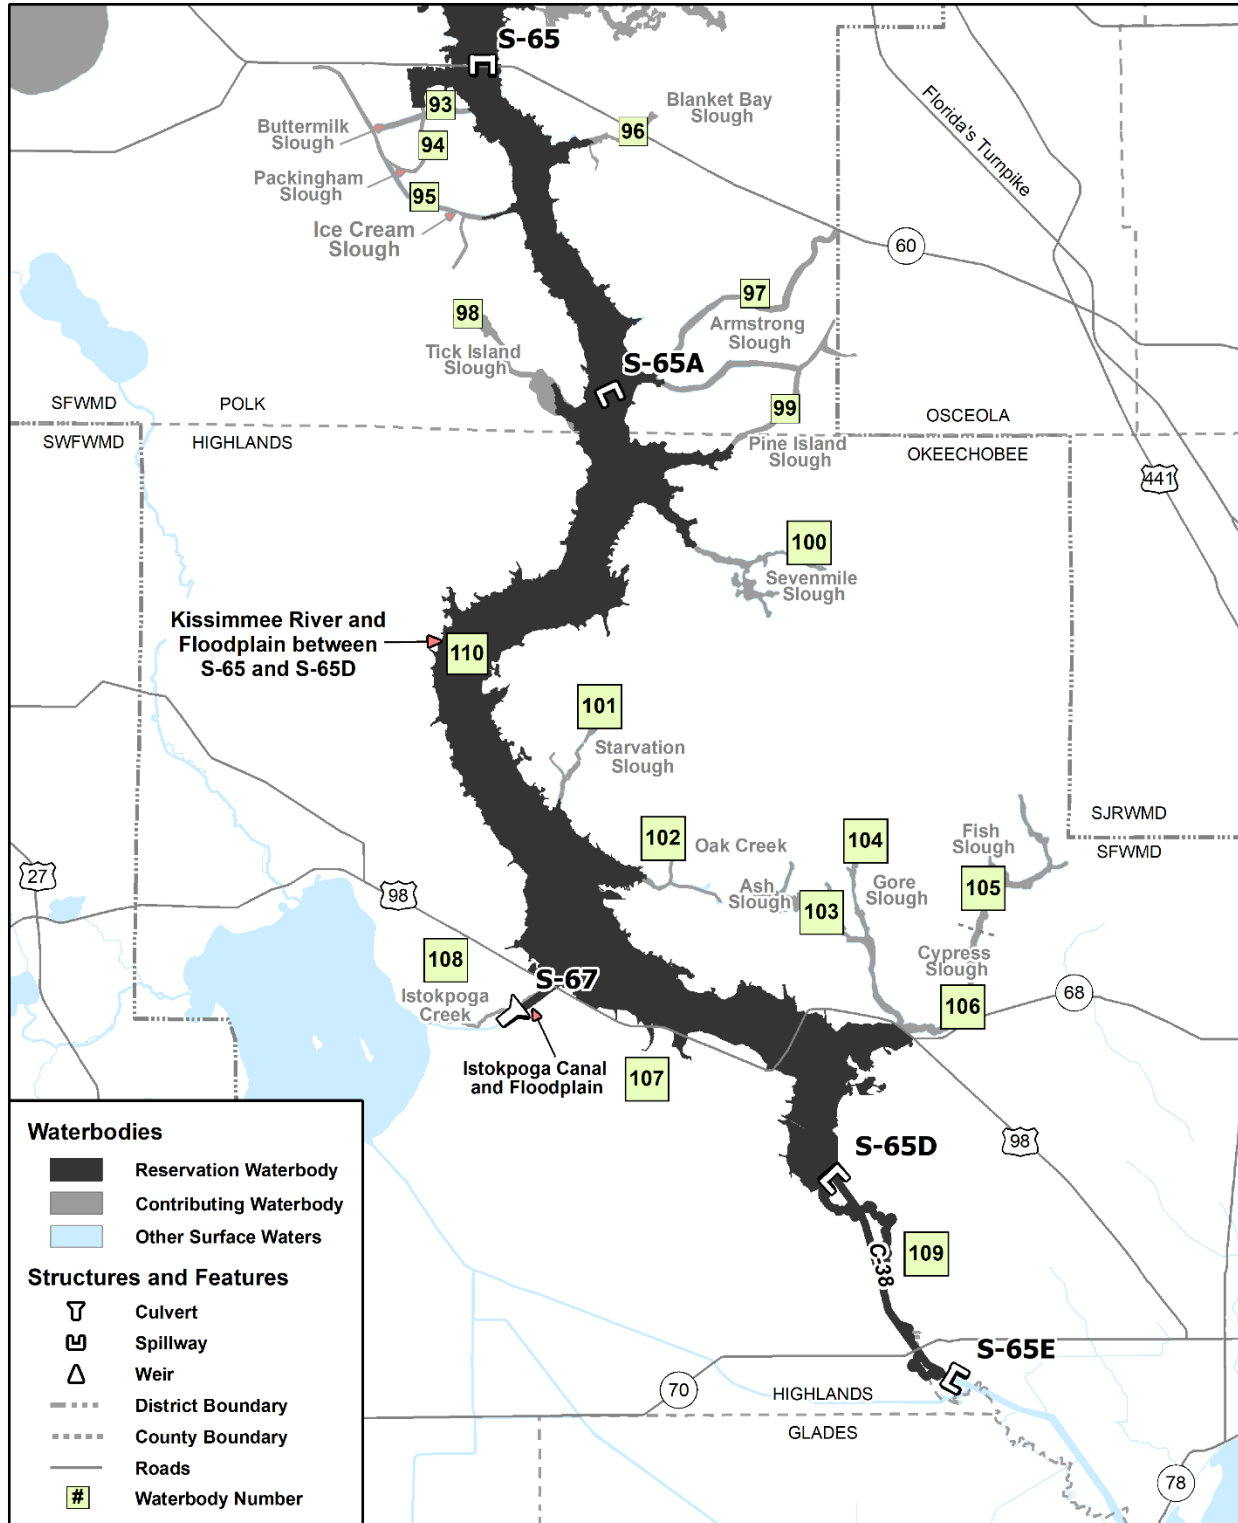


Figure A-9. Kissimmee River reservation and contributing waterbodies.

2441 **LITERATURE CITED**

2442 SFWMD. 2015. *Applicant's Handbook for Water Use Permit Applications within the South Florida Water*
2443 *Management District*. South Florida Water Management District, West Palm Beach, FL.
2444 September 7, 2015.

2445

DRAFT

**APPENDIX B:
WATER PROPOSED FOR RESERVATION**

All unallocated water in the Kissimmee River and in the Headwaters Revitalization Lakes up to the stages in the Headwaters Revitalization Schedule (HRS) at the S-65 water control structure will be reserved for the protection of fish and wildlife and to ensure the successful completion and implementation of the Kissimmee River Restoration Project (KRRP). For Upper Chain of Lakes (UCOL) reservation waterbodies, only water up to specific identified stages are proposed for reservation. These stages preserve the seasonal and interannual water level variability needed to support fish and wildlife in the UCOL reservation waterbodies. When daily lake stages are plotted over the course of a year (water reservation hydrograph), a water reservation line (WRL) emerges that demarcates the boundary between water needed (at or below the line) and water not needed (above the line) for the protection of fish and wildlife. **Figures B-1 to B-7** provide the water reservation hydrographs with WRLs and current authorized regulation schedules for the reservation waterbodies. **Tables B-1 to B-7** provide the daily water reservation stages plotted on the hydrographs for each reservation waterbody. The Water Reservation rules will reserve from allocation all water at or below the WRLs that is not allocated to existing legal users (permittees). Water above the WRLs will be available for future allocation, provided other regulatory permitting criteria are met.

The process to develop the WRLs for each UCOL reservation waterbody involved: 1) specifying a seasonal high stage and duration; 2) specifying a seasonal low stage; 3) connecting the seasonal high to the seasonal low stage with a straight-line recession event; 4) adjusting the resulting WRL to protect breeding season and wet season hydrological patterns (recession and ascension rates or breeding season water levels) that historically occurred; and 5) adjusting the resulting WRL to meet specific hydrologic requirements of fish and wildlife in the lake.

The seasonal high stage specified for the reservation waterbody defines an upper stage limit or threshold that preserves the maximum littoral extent in the waterbody, ensuring no reduction in wetland extent will occur below that elevation. For all UCOL reservation waterbodies, the seasonal high stage was specified 1) as the same high stage limit of the current stage regulation schedule, and 2) to occur on the first day the regulation schedule allows that stage to be reached (November 1).

Selection of the seasonal low stage establishes how much of the littoral zone can be dried out on an annual basis (i.e., it defines the boundary between permanently inundated aquatic vegetation and vegetation types that are seasonally inundated and require regular drying events). Under the current regulation schedules, lake stages are managed to reach the same low stage on May 31 every year, providing storage capacity for flood control at the beginning of the wet season. In order to protect the extent of permanently flooded marshes, the minimum stage for the UCOL reservation waterbodies was set as the minimum of the regulation schedule. This ensures the extent of annual drying events would not increase downslope from historical levels, which might lead to a reduction in overall open-water extent or an expansion of the littoral zone lakeward (downslope). A more detailed description of the approach used to establish the WRL for each UCOL reservation waterbody is provided in Chapter 5 of the main document.

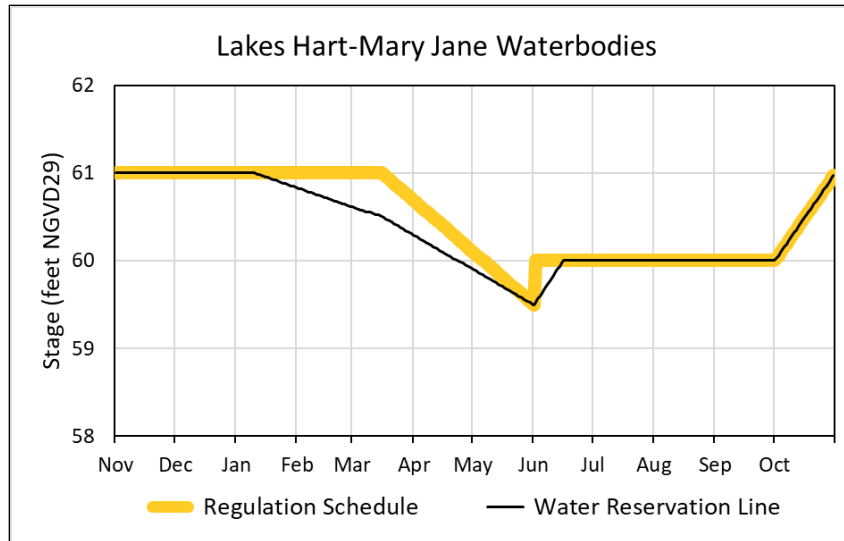


Figure B-1. Hydrograph of the current regulation schedule and the water reservation stage (water reservation line) for Lakes Hart-Mary Jane reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-1**).

Table B-1. Maximum daily water reservation stages for Lakes Hart-Mary Jane reservation waterbodies (black line in **Figure B-1**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	61.00	60.83	60.62	60.29	59.90	59.50	60.00	60.00	60.00	60.00	61.00	61.00
2	61.00	60.82	60.61	60.28	59.89	59.53	60.00	60.00	60.00	60.03	61.00	61.00
3	61.00	60.82	60.60	60.27	59.88	59.57	60.00	60.00	60.00	60.06	61.00	61.00
4	61.00	60.81	60.59	60.25	59.86	59.60	60.00	60.00	60.00	60.10	61.00	61.00
5	61.00	60.80	60.58	60.24	59.85	59.63	60.00	60.00	60.00	60.13	61.00	61.00
6	61.00	60.79	60.58	60.23	59.84	59.67	60.00	60.00	60.00	60.16	61.00	61.00
7	61.00	60.78	60.57	60.21	59.82	59.70	60.00	60.00	60.00	60.19	61.00	61.00
8	61.00	60.78	60.56	60.20	59.81	59.73	60.00	60.00	60.00	60.23	61.00	61.00
9	61.00	60.77	60.55	60.19	59.80	59.77	60.00	60.00	60.00	60.26	61.00	61.00
10	61.00	60.76	60.55	60.18	59.79	59.80	60.00	60.00	60.00	60.29	61.00	61.00
11	60.99	60.75	60.54	60.16	59.77	59.83	60.00	60.00	60.00	60.32	61.00	61.00
12	60.98	60.75	60.53	60.15	59.76	59.87	60.00	60.00	60.00	60.35	61.00	61.00
13	60.98	60.74	60.52	60.14	59.75	59.90	60.00	60.00	60.00	60.39	61.00	61.00
14	60.97	60.73	60.52	60.12	59.73	59.93	60.00	60.00	60.00	60.42	61.00	61.00
15	60.96	60.72	60.51	60.11	59.72	59.97	60.00	60.00	60.00	60.45	61.00	61.00
16	60.95	60.72	60.50	60.10	59.71	60.00	60.00	60.00	60.00	60.48	61.00	61.00
17	60.95	60.71	60.49	60.08	59.69	60.00	60.00	60.00	60.00	60.52	61.00	61.00
18	60.94	60.70	60.47	60.07	59.68	60.00	60.00	60.00	60.00	60.55	61.00	61.00
19	60.93	60.69	60.46	60.06	59.67	60.00	60.00	60.00	60.00	60.58	61.00	61.00
20	60.92	60.68	60.45	60.05	59.66	60.00	60.00	60.00	60.00	60.61	61.00	61.00
21	60.92	60.68	60.44	60.03	59.64	60.00	60.00	60.00	60.00	60.65	61.00	61.00
22	60.91	60.67	60.42	60.02	59.63	60.00	60.00	60.00	60.00	60.68	61.00	61.00
23	60.90	60.66	60.41	60.01	59.62	60.00	60.00	60.00	60.00	60.71	61.00	61.00
24	60.89	60.65	60.40	59.99	59.60	60.00	60.00	60.00	60.00	60.74	61.00	61.00
25	60.88	60.65	60.38	59.98	59.59	60.00	60.00	60.00	60.00	60.77	61.00	61.00
26	60.88	60.64	60.37	59.97	59.58	60.00	60.00	60.00	60.00	60.81	61.00	61.00
27	60.87	60.63	60.36	59.95	59.56	60.00	60.00	60.00	60.00	60.84	61.00	61.00
28	60.86	60.62	60.34	59.94	59.55	60.00	60.00	60.00	60.00	60.87	61.00	61.00
29	60.85		60.33	59.93	59.54	60.00	60.00	60.00	60.00	60.90	61.00	61.00
30	60.85		60.32	59.92	59.53	60.00	60.00	60.00	60.00	60.94	61.00	61.00
31	60.84		60.31		59.51		60.00	60.00		60.97		61.00

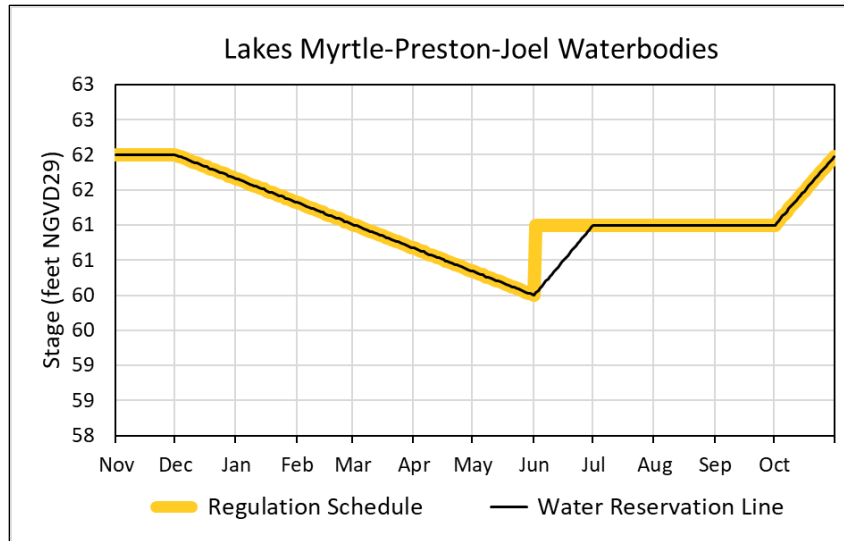


Figure B-2. Hydrograph of the current regulation schedule and the water reservation stage (water reservation line) for Lakes Myrtle-Preston-Joel reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-2**).

Table B-2. Maximum daily water reservation stages for Lakes Myrtle-Preston-Joel reservation waterbodies (black line in **Figure B-2**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	61.66	61.32	61.01	60.67	60.34	60.00	61.00	61.00	61.00	61.00	62.00	62.00
2	61.65	61.31	61.00	60.66	60.33	60.03	61.00	61.00	61.00	61.03	62.00	61.99
3	61.64	61.30	60.99	60.65	60.32	60.07	61.00	61.00	61.00	61.06	62.00	61.98
4	61.63	61.29	60.98	60.64	60.31	60.10	61.00	61.00	61.00	61.10	62.00	61.97
5	61.62	61.27	60.97	60.63	60.30	60.13	61.00	61.00	61.00	61.13	62.00	61.96
6	61.60	61.26	60.96	60.62	60.29	60.17	61.00	61.00	61.00	61.16	62.00	61.95
7	61.59	61.25	60.94	60.60	60.27	60.20	61.00	61.00	61.00	61.19	62.00	61.93
8	61.58	61.24	60.93	60.59	60.26	60.23	61.00	61.00	61.00	61.23	62.00	61.92
9	61.57	61.23	60.92	60.58	60.25	60.27	61.00	61.00	61.00	61.26	62.00	61.91
10	61.56	61.22	60.91	60.57	60.24	60.30	61.00	61.00	61.00	61.29	62.00	61.90
11	61.55	61.21	60.90	60.56	60.23	60.33	61.00	61.00	61.00	61.32	62.00	61.89
12	61.54	61.20	60.89	60.55	60.22	60.37	61.00	61.00	61.00	61.35	62.00	61.88
13	61.53	61.19	60.88	60.54	60.21	60.40	61.00	61.00	61.00	61.39	62.00	61.87
14	61.52	61.18	60.87	60.53	60.20	60.43	61.00	61.00	61.00	61.42	62.00	61.86
15	61.51	61.16	60.86	60.52	60.19	60.47	61.00	61.00	61.00	61.45	62.00	61.85
16	61.49	61.15	60.85	60.51	60.18	60.50	61.00	61.00	61.00	61.48	62.00	61.84
17	61.48	61.14	60.84	60.49	60.16	60.53	61.00	61.00	61.00	61.52	62.00	61.83
18	61.47	61.13	60.82	60.48	60.15	60.57	61.00	61.00	61.00	61.55	62.00	61.81
19	61.46	61.12	60.81	60.47	60.14	60.60	61.00	61.00	61.00	61.58	62.00	61.80
20	61.45	61.11	60.80	60.46	60.13	60.63	61.00	61.00	61.00	61.61	62.00	61.79
21	61.44	61.10	60.79	60.45	60.12	60.67	61.00	61.00	61.00	61.65	62.00	61.78
22	61.43	61.09	60.78	60.44	60.11	60.70	61.00	61.00	61.00	61.68	62.00	61.77
23	61.42	61.08	60.77	60.43	60.10	60.73	61.00	61.00	61.00	61.71	62.00	61.76
24	61.41	61.07	60.76	60.42	60.09	60.77	61.00	61.00	61.00	61.74	62.00	61.75
25	61.40	61.05	60.75	60.41	60.08	60.80	61.00	61.00	61.00	61.77	62.00	61.74
26	61.38	61.04	60.74	60.40	60.07	60.83	61.00	61.00	61.00	61.81	62.00	61.73
27	61.37	61.03	60.73	60.38	60.05	60.87	61.00	61.00	61.00	61.84	62.00	61.72
28	61.36	61.02	60.71	60.37	60.04	60.90	61.00	61.00	61.00	61.87	62.00	61.70
29	61.35		60.70	60.36	60.03	60.93	61.00	61.00	61.00	61.90	62.00	61.69
30	61.34		60.69	60.35	60.02	60.97	61.00	61.00	61.00	61.94	62.00	61.68
31	61.33		60.68		60.01		61.00	61.00		61.97		61.67

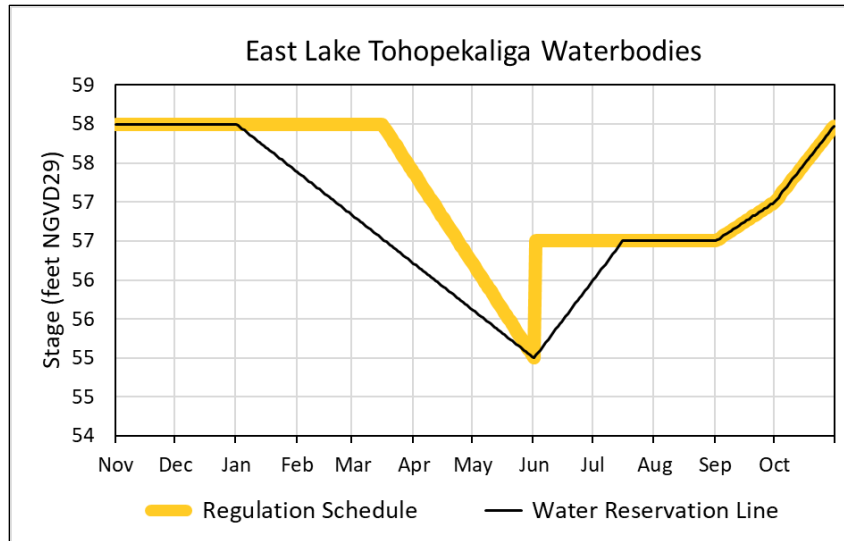


Figure B-3. Hydrograph of the current regulation schedule and the water reservation stage (water reservation line) for East Lake Tohopekaliga reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-3**).

Table B-3. Maximum daily water reservation stages for East Lake Tohopekaliga reservation waterbodies (black line in **Figure B-3**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	58.00	57.38	56.83	56.21	55.62	55.00	56.00	56.50	56.50	57.00	58.00	58.00
2	57.98	57.36	56.81	56.19	55.60	55.03	56.03	56.50	56.52	57.03	58.00	58.00
3	57.96	57.34	56.79	56.17	55.58	55.07	56.07	56.50	56.53	57.06	58.00	58.00
4	57.94	57.32	56.77	56.15	55.56	55.10	56.10	56.50	56.55	57.10	58.00	58.00
5	57.92	57.30	56.75	56.13	55.54	55.13	56.13	56.50	56.57	57.13	58.00	58.00
6	57.90	57.28	56.73	56.11	55.52	55.17	56.17	56.50	56.58	57.16	58.00	58.00
7	57.88	57.26	56.71	56.09	55.50	55.20	56.20	56.50	56.60	57.19	58.00	58.00
8	57.86	57.25	56.69	56.07	55.48	55.23	56.23	56.50	56.62	57.23	58.00	58.00
9	57.84	57.23	56.67	56.05	55.46	55.27	56.27	56.50	56.63	57.26	58.00	58.00
10	57.82	57.21	56.65	56.03	55.44	55.30	56.30	56.50	56.65	57.29	58.00	58.00
11	57.80	57.19	56.63	56.01	55.42	55.33	56.33	56.50	56.67	57.32	58.00	58.00
12	57.78	57.17	56.61	55.99	55.40	55.37	56.37	56.50	56.68	57.35	58.00	58.00
13	57.76	57.15	56.59	55.97	55.38	55.40	56.40	56.50	56.70	57.39	58.00	58.00
14	57.74	57.13	56.57	55.95	55.36	55.43	56.43	56.50	56.72	57.42	58.00	58.00
15	57.72	57.11	56.55	55.93	55.34	55.47	56.47	56.50	56.73	57.45	58.00	58.00
16	57.70	57.09	56.53	55.91	55.32	55.50	56.50	56.50	56.75	57.48	58.00	58.00
17	57.68	57.07	56.51	55.89	55.30	55.53	56.50	56.50	56.77	57.52	58.00	58.00
18	57.66	57.05	56.49	55.87	55.28	55.57	56.50	56.50	56.78	57.55	58.00	58.00
19	57.64	57.03	56.47	55.85	55.26	55.60	56.50	56.50	56.80	57.58	58.00	58.00
20	57.62	57.01	56.45	55.83	55.24	55.63	56.50	56.50	56.82	57.61	58.00	58.00
21	57.60	56.99	56.43	55.81	55.22	55.67	56.50	56.50	56.83	57.65	58.00	58.00
22	57.58	56.97	56.41	55.79	55.20	55.70	56.50	56.50	56.85	57.68	58.00	58.00
23	57.56	56.95	56.39	55.77	55.18	55.73	56.50	56.50	56.87	57.71	58.00	58.00
24	57.54	56.93	56.37	55.75	55.16	55.77	56.50	56.50	56.88	57.74	58.00	58.00
25	57.52	56.91	56.35	55.74	55.14	55.80	56.50	56.50	56.90	57.77	58.00	58.00
26	57.50	56.89	56.33	55.72	55.12	55.83	56.50	56.50	56.92	57.81	58.00	58.00
27	57.48	56.87	56.31	55.70	55.10	55.87	56.50	56.50	56.93	57.84	58.00	58.00
28	57.46	56.85	56.29	55.68	55.08	55.90	56.50	56.50	56.95	57.87	58.00	58.00
29	57.44		56.27	55.66	55.06	55.93	56.50	56.50	56.97	57.90	58.00	58.00
30	57.42		56.25	55.64	55.04	55.97	56.50	56.50	56.98	57.94	58.00	58.00
31	57.40		56.23		55.02		56.50	56.50		57.97		58.00

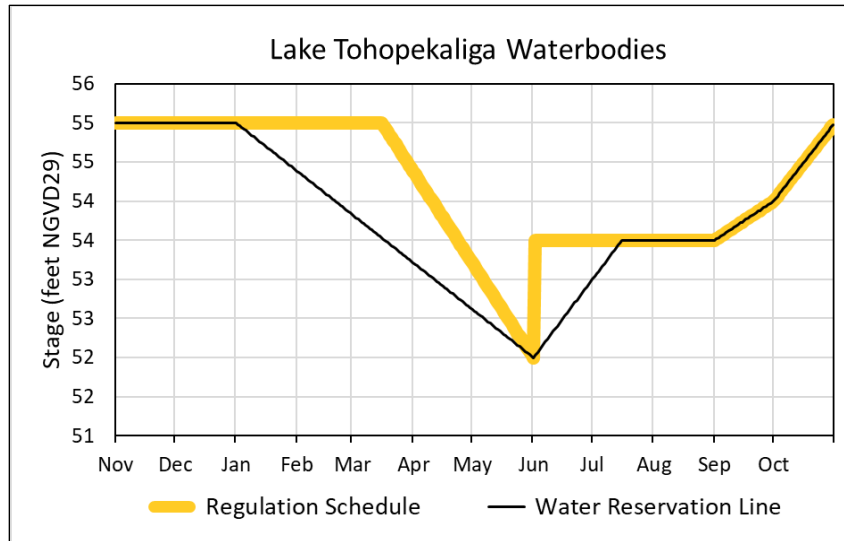


Figure B-4. Hydrograph of the current regulation schedule and the water reservation stage (water reservation line) for Lake Tohopekaliga reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-4**).

Table B-4. Maximum daily water reservation stages for Lake Tohopekaliga reservation waterbodies (black line in **Figure B-4**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	55.00	54.38	53.83	53.21	52.62	52.00	53.00	53.50	53.50	54.00	55.00	55.00
2	54.98	54.36	53.81	53.19	52.60	52.03	53.03	53.50	53.52	54.03	55.00	55.00
3	54.96	54.34	53.79	53.17	52.58	52.07	53.07	53.50	53.53	54.06	55.00	55.00
4	54.94	54.32	53.77	53.15	52.56	52.10	53.10	53.50	53.55	54.10	55.00	55.00
5	54.92	54.30	53.75	53.13	52.54	52.13	53.13	53.50	53.57	54.13	55.00	55.00
6	54.90	54.28	53.73	53.11	52.52	52.17	53.17	53.50	53.58	54.16	55.00	55.00
7	54.88	54.26	53.71	53.09	52.50	52.20	53.20	53.50	53.60	54.19	55.00	55.00
8	54.86	54.25	53.69	53.07	52.48	52.23	53.23	53.50	53.62	54.23	55.00	55.00
9	54.84	54.23	53.67	53.05	52.46	52.27	53.27	53.50	53.63	54.26	55.00	55.00
10	54.82	54.21	53.65	53.03	52.44	52.30	53.30	53.50	53.65	54.29	55.00	55.00
11	54.80	54.19	53.63	53.01	52.42	52.33	53.33	53.50	53.67	54.32	55.00	55.00
12	54.78	54.17	53.61	52.99	52.40	52.37	53.37	53.50	53.68	54.35	55.00	55.00
13	54.76	54.15	53.59	52.97	52.38	52.40	53.40	53.50	53.70	54.39	55.00	55.00
14	54.74	54.13	53.57	52.95	52.36	52.43	53.43	53.50	53.72	54.42	55.00	55.00
15	54.72	54.11	53.55	52.93	52.34	52.47	53.47	53.50	53.73	54.45	55.00	55.00
16	54.70	54.09	53.53	52.91	52.32	52.50	53.50	53.50	53.75	54.48	55.00	55.00
17	54.68	54.07	53.51	52.89	52.30	52.53	53.50	53.50	53.77	54.52	55.00	55.00
18	54.66	54.05	53.49	52.87	52.28	52.57	53.50	53.50	53.78	54.55	55.00	55.00
19	54.64	54.03	53.47	52.85	52.26	52.60	53.50	53.50	53.80	54.58	55.00	55.00
20	54.62	54.01	53.45	52.83	52.24	52.63	53.50	53.50	53.82	54.61	55.00	55.00
21	54.60	53.99	53.43	52.81	52.22	52.67	53.50	53.50	53.83	54.65	55.00	55.00
22	54.58	53.97	53.41	52.79	52.20	52.70	53.50	53.50	53.85	54.68	55.00	55.00
23	54.56	53.95	53.39	52.77	52.18	52.73	53.50	53.50	53.87	54.71	55.00	55.00
24	54.54	53.93	53.37	52.75	52.16	52.77	53.50	53.50	53.88	54.74	55.00	55.00
25	54.52	53.91	53.35	52.74	52.14	52.80	53.50	53.50	53.90	54.77	55.00	55.00
26	54.50	53.89	53.33	52.72	52.12	52.83	53.50	53.50	53.92	54.81	55.00	55.00
27	54.48	53.87	53.31	52.70	52.10	52.87	53.50	53.50	53.93	54.84	55.00	55.00
28	54.46	53.85	53.29	52.68	52.08	52.90	53.50	53.50	53.95	54.87	55.00	55.00
29	54.44		53.27	52.66	52.06	52.93	53.50	53.50	53.97	54.90	55.00	55.00
30	54.42		53.25	52.64	52.04	52.97	53.50	53.50	53.98	54.94	55.00	55.00
31	54.40		53.23		52.02		53.50	53.50		54.97		55.00

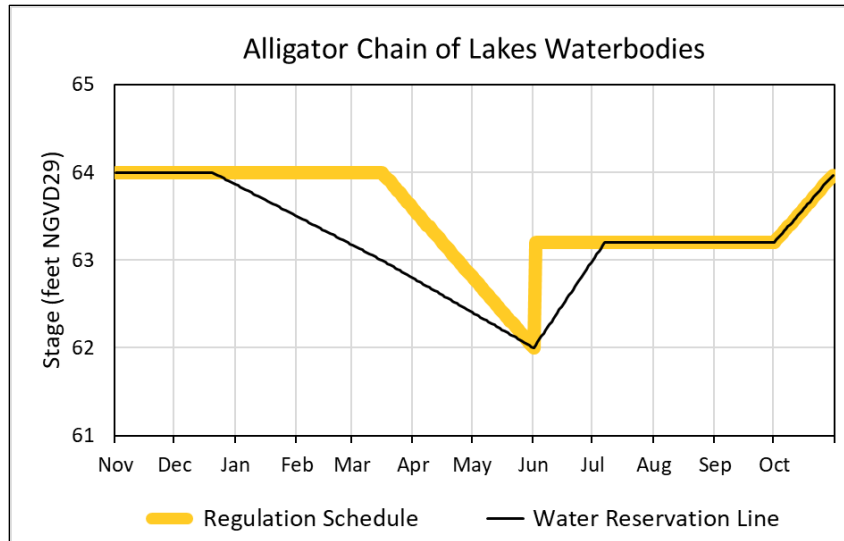


Figure B-5. Hydrograph of the current regulation schedule and the water reservation stage (water reservation line) for Alligator Chain of Lakes reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-5**).

Table B-5. Maximum daily water reservation stages for Alligator Chain of Lakes reservation waterbodies (black line in **Figure B-5**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	63.86	63.50	63.17	62.79	62.40	62.00	63.00	63.20	63.20	63.20	64.00	64.00
2	63.85	63.49	63.16	62.78	62.39	62.03	63.03	63.20	63.20	63.23	64.00	64.00
3	63.84	63.48	63.15	62.77	62.38	62.07	63.07	63.20	63.20	63.25	64.00	64.00
4	63.83	63.47	63.14	62.75	62.36	62.10	63.10	63.20	63.20	63.28	64.00	64.00
5	63.81	63.45	63.13	62.74	62.35	62.13	63.13	63.20	63.20	63.30	64.00	64.00
6	63.80	63.44	63.12	62.73	62.34	62.17	63.17	63.20	63.20	63.33	64.00	64.00
7	63.79	63.43	63.10	62.71	62.32	62.20	63.20	63.20	63.20	63.35	64.00	64.00
8	63.78	63.42	63.09	62.70	62.31	62.23	63.20	63.20	63.20	63.38	64.00	64.00
9	63.77	63.41	63.08	62.69	62.30	62.27	63.20	63.20	63.20	63.41	64.00	64.00
10	63.76	63.40	63.07	62.68	62.29	62.30	63.20	63.20	63.20	63.43	64.00	64.00
11	63.74	63.38	63.06	62.66	62.27	62.33	63.20	63.20	63.20	63.46	64.00	64.00
12	63.73	63.37	63.05	62.65	62.26	62.37	63.20	63.20	63.20	63.48	64.00	64.00
13	63.72	63.36	63.03	62.64	62.25	62.40	63.20	63.20	63.20	63.51	64.00	64.00
14	63.71	63.35	63.02	62.62	62.23	62.43	63.20	63.20	63.20	63.54	64.00	64.00
15	63.70	63.34	63.01	62.61	62.22	62.47	63.20	63.20	63.20	63.56	64.00	64.00
16	63.69	63.33	63.00	62.60	62.21	62.50	63.20	63.20	63.20	63.59	64.00	64.00
17	63.67	63.31	62.99	62.58	62.19	62.53	63.20	63.20	63.20	63.61	64.00	64.00
18	63.66	63.30	62.97	62.57	62.18	62.57	63.20	63.20	63.20	63.64	64.00	64.00
19	63.65	63.29	62.96	62.56	62.17	62.60	63.20	63.20	63.20	63.66	64.00	64.00
20	63.64	63.28	62.95	62.55	62.16	62.63	63.20	63.20	63.20	63.69	64.00	64.00
21	63.63	63.27	62.94	62.53	62.14	62.67	63.20	63.20	63.20	63.72	64.00	63.99
22	63.62	63.26	62.92	62.52	62.13	62.70	63.20	63.20	63.20	63.74	64.00	63.98
23	63.60	63.24	62.91	62.51	62.12	62.73	63.20	63.20	63.20	63.77	64.00	63.97
24	63.59	63.23	62.90	62.49	62.10	62.77	63.20	63.20	63.20	63.79	64.00	63.95
25	63.58	63.22	62.88	62.48	62.09	62.80	63.20	63.20	63.20	63.82	64.00	63.94
26	63.57	63.21	62.87	62.47	62.08	62.83	63.20	63.20	63.20	63.85	64.00	63.93
27	63.56	63.20	62.86	62.45	62.06	62.87	63.20	63.20	63.20	63.87	64.00	63.92
28	63.55	63.19	62.84	62.44	62.05	62.90	63.20	63.20	63.20	63.90	64.00	63.91
29	63.53		62.83	62.43	62.04	62.93	63.20	63.20	63.20	63.92	64.00	63.90
30	63.52		62.82	62.42	62.03	62.97	63.20	63.20	63.20	63.95	64.00	63.88
31	63.51		62.81		62.01		63.20	63.20		63.97		63.87

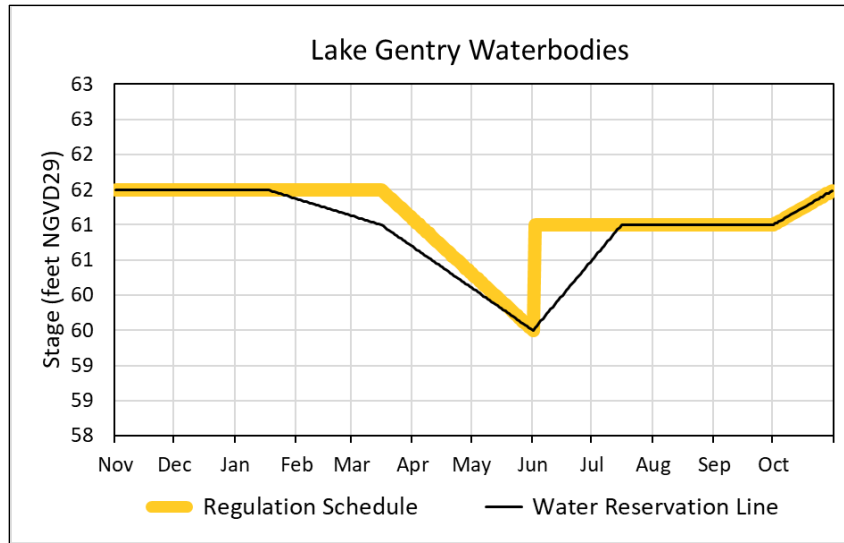


Figure B-6. Hydrograph of the current regulation schedule and the water reservation stage (water reservation line) for Lake Gentry reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-6**).

Table B-6. Maximum daily water reservation stages for Lake Gentry reservation waterbodies (black line in **Figure B-6**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	61.50	61.37	61.13	60.69	60.10	59.50	60.50	61.00	61.00	61.00	61.50	61.50
2	61.50	61.36	61.12	60.67	60.08	59.53	60.53	61.00	61.00	61.02	61.50	61.50
3	61.50	61.35	61.11	60.65	60.06	59.57	60.57	61.00	61.00	61.03	61.50	61.50
4	61.50	61.34	61.10	60.63	60.05	59.60	60.60	61.00	61.00	61.05	61.50	61.50
5	61.50	61.34	61.09	60.61	60.03	59.63	60.63	61.00	61.00	61.06	61.50	61.50
6	61.50	61.33	61.09	60.59	60.01	59.67	60.67	61.00	61.00	61.08	61.50	61.50
7	61.50	61.32	61.08	60.57	59.99	59.70	60.70	61.00	61.00	61.10	61.50	61.50
8	61.50	61.31	61.07	60.55	59.97	59.73	60.73	61.00	61.00	61.11	61.50	61.50
9	61.50	61.30	61.06	60.53	59.95	59.77	60.77	61.00	61.00	61.13	61.50	61.50
10	61.50	61.29	61.05	60.51	59.93	59.80	60.80	61.00	61.00	61.15	61.50	61.50
11	61.50	61.28	61.04	60.49	59.91	59.83	60.83	61.00	61.00	61.16	61.50	61.50
12	61.50	61.28	61.03	60.47	59.89	59.87	60.87	61.00	61.00	61.18	61.50	61.50
13	61.50	61.27	61.03	60.45	59.87	59.90	60.90	61.00	61.00	61.19	61.50	61.50
14	61.50	61.26	61.02	60.44	59.85	59.93	60.93	61.00	61.00	61.21	61.50	61.50
15	61.50	61.25	61.01	60.42	59.83	59.97	60.97	61.00	61.00	61.23	61.50	61.50
16	61.50	61.24	61.00	60.40	59.81	60.00	61.00	61.00	61.00	61.24	61.50	61.50
17	61.50	61.23	60.98	60.38	59.79	60.03	61.00	61.00	61.00	61.26	61.50	61.50
18	61.49	61.22	60.96	60.36	59.77	60.07	61.00	61.00	61.00	61.27	61.50	61.50
19	61.48	61.22	60.94	60.34	59.75	60.10	61.00	61.00	61.00	61.29	61.50	61.50
20	61.47	61.21	60.92	60.32	59.73	60.13	61.00	61.00	61.00	61.31	61.50	61.50
21	61.47	61.20	60.90	60.30	59.71	60.17	61.00	61.00	61.00	61.32	61.50	61.50
22	61.46	61.19	60.88	60.28	59.69	60.20	61.00	61.00	61.00	61.34	61.50	61.50
23	61.45	61.18	60.86	60.26	59.68	60.23	61.00	61.00	61.00	61.35	61.50	61.50
24	61.44	61.17	60.84	60.24	59.66	60.27	61.00	61.00	61.00	61.37	61.50	61.50
25	61.43	61.16	60.82	60.22	59.64	60.30	61.00	61.00	61.00	61.39	61.50	61.50
26	61.42	61.16	60.81	60.20	59.62	60.33	61.00	61.00	61.00	61.40	61.50	61.50
27	61.41	61.15	60.79	60.18	59.60	60.37	61.00	61.00	61.00	61.42	61.50	61.50
28	61.41	61.14	60.77	60.16	59.58	60.40	61.00	61.00	61.00	61.44	61.50	61.50
29	61.40		60.75	60.14	59.56	60.43	61.00	61.00	61.00	61.45	61.50	61.50
30	61.39		60.73	60.12	59.54	60.47	61.00	61.00	61.00	61.47	61.50	61.50
31	61.38		60.71		59.52		61.00	61.00		61.48		61.50

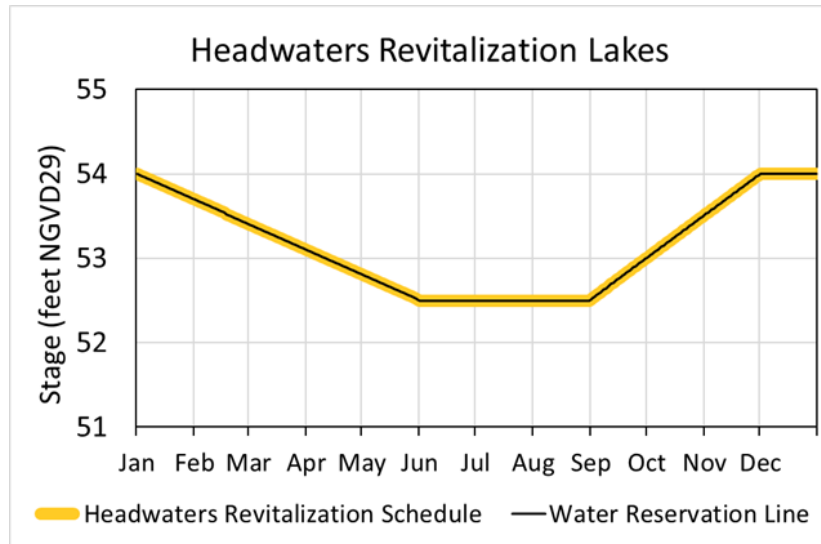


Figure B-7. Hydrograph of the authorized Headwaters Revitalization Schedule (HRS) at S-65 and the water reservation stage (water reservation line) for the Headwaters Revitalization Lakes reservation waterbodies. All water up to the water reservation line is reserved from allocation for protection of fish and wildlife (derived from data in **Table B-7**).

Table B-7. Maximum daily water reservation stages for the Headwaters Revitalization Lakes reservation waterbodies (black line in **Figure B-7**).

Day	January	February	March	April	May	June	July	August	September	October	November	December
1	54.00	53.69	53.41	53.10	52.81	52.50	52.50	52.50	52.52	53.01	53.51	54.00
2	53.99	53.68	53.40	53.09	52.80	52.50	52.50	52.50	52.53	53.02	53.53	54.00
3	53.98	53.67	53.39	53.08	52.79	52.50	52.50	52.50	52.55	53.04	53.54	54.00
4	53.97	53.66	53.38	53.07	52.78	52.50	52.50	52.50	52.57	53.05	53.56	54.00
5	53.96	53.65	53.37	53.06	52.77	52.50	52.50	52.50	52.58	53.07	53.58	54.00
6	53.95	53.64	53.36	53.05	52.76	52.50	52.50	52.50	52.60	53.09	53.59	54.00
7	53.94	53.63	53.35	53.04	52.75	52.50	52.50	52.50	52.61	53.10	53.61	54.00
8	53.93	53.63	53.34	53.03	52.74	52.50	52.50	52.50	52.63	53.12	53.62	54.00
9	53.92	53.62	53.33	53.02	52.73	52.50	52.50	52.50	52.65	53.14	53.64	54.00
10	53.91	53.61	53.32	53.01	52.72	52.50	52.50	52.50	52.66	53.15	53.66	54.00
11	53.90	53.60	53.31	53.00	52.71	52.50	52.50	52.50	52.68	53.17	53.67	54.00
12	53.89	53.59	53.30	52.99	52.70	52.50	52.50	52.50	52.70	53.18	53.69	54.00
13	53.88	53.58	53.29	52.98	52.69	52.50	52.50	52.50	52.71	53.20	53.71	54.00
14	53.87	53.57	53.28	52.97	52.68	52.50	52.50	52.50	52.73	53.22	53.72	54.00
15	53.86	53.56	53.27	52.96	52.67	52.50	52.50	52.50	52.74	53.23	53.74	54.00
16	53.85	53.55	53.26	52.95	52.66	52.50	52.50	52.50	52.76	53.25	53.76	54.00
17	53.84	53.54	53.25	52.94	52.65	52.50	52.50	52.50	52.78	53.27	53.77	54.00
18	53.83	53.53	53.24	52.93	52.64	52.50	52.50	52.50	52.79	53.28	53.79	54.00
19	53.82	53.52	53.23	52.92	52.63	52.50	52.50	52.50	52.81	53.30	53.80	54.00
20	53.81	53.51	53.22	52.91	52.62	52.50	52.50	52.50	52.83	53.32	53.82	54.00
21	53.80	53.50	53.21	52.90	52.61	52.50	52.50	52.50	52.84	53.33	53.84	54.00
22	53.79	53.49	53.20	52.89	52.60	52.50	52.50	52.50	52.86	53.35	53.85	54.00
23	53.78	53.48	53.19	52.88	52.59	52.50	52.50	52.50	52.88	53.36	53.87	54.00
24	53.77	53.47	53.18	52.88	52.58	52.50	52.50	52.50	52.89	53.38	53.89	54.00
25	53.76	53.46	53.17	52.87	52.57	52.50	52.50	52.50	52.91	53.40	53.90	54.00
26	53.75	53.45	53.16	52.86	52.56	52.50	52.50	52.50	52.92	53.41	53.92	54.00
27	53.74	53.44	53.15	52.85	52.55	52.50	52.50	52.50	52.94	53.43	53.93	54.00
28	53.73	53.43	53.14	52.84	52.54	52.50	52.50	52.50	52.96	53.45	53.95	54.00
29	53.72	53.42	53.13	52.83	52.53	52.50	52.50	52.50	52.97	53.46	53.97	54.00
30	53.71		53.12	52.82	52.52	52.50	52.50	52.50	52.99	53.48	53.98	54.00
31	53.70		53.11		52.51		52.50	52.50		53.49		54.00

2533

2534

2535

APPENDIX C: DOCUMENTATION REPORT FOR THE UK-OPS MODEL

DRAFT

FINAL DRAFT

**DOCUMENTATION REPORT FOR THE
UPPER KISSIMMEE – OPERATIONS
SIMULATION (UK-OPS) MODEL**

Prepared by:

Calvin J. Neidrauer, P.E.

Hydrology & Hydraulics Bureau

South Florida Water Management District

March 2020

ACKNOWLEDGMENTS

The Upper Kissimmee – Operations Simulation Model was developed at the request of Paul Linton, P.E., former Chief of the Water Management Office at the South Florida Water Management District (SFWMD). Mr. Linton had the initial idea to build an easy-to-use spreadsheet model for testing alternative operations and offered suggestions for features and implementation methods. The author also acknowledges Akin Owosina and Walter Wilcox for allocating budgetary resources to enable completion of model development in the SFWMD’s Hydrology and Hydraulics Bureau.

Dr. David Anderson at the SFWMD has been a primary model user and has suggested several useful improvements and new features for testing alternative operations. Dr. Anderson and Dr. Jeff Iudicello, also at the SFWMD, reviewed the draft documentation report and offered many suggestions.

External expert peer reviewers, Dr. Mark Houck, P.E., and Dr. Richard Punnett, P.E., are recognized for their helpful assessments and recommendations to improve both the model and this documentation report.

Special thanks to Natalie Kraft at the SFWMD for applying her outstanding technical editing skills to improve and complete this final document.

EXECUTIVE SUMMARY

Over the past four decades, several regional water resource simulation models, varying in complexity and utility, have been developed by the South Florida Water Management District (SFWMD) for the Upper and Lower Kissimmee Basins. The Upper Kissimmee – Operations Simulation (UK-OPS) Model is a coarse-scale water management simulation model developed to easily and quickly test alternative water operation strategies. Additional model features were created to evaluate the effects of surface water withdrawals based on the draft Kissimmee River and Chain of Lakes Water Reservations rules.

The increasing utility and computational power of Microsoft Excel® made the spreadsheet software program a logical platform to build the UK-OPS Model. The model is a simple, daily timestep, continuous simulation model of the hydrology and operations of the primary lakes in the Upper Kissimmee Basin. Analysts can use the UK-OPS Model to test a variety of operating strategies and receive instant feedback of performance for the primary lake management objectives.

This report describes the purpose, utility, and technical details of the UK-OPS Model. It is not a users' guide, but it is prerequisite reading for analysts who wish to use the model. The UK-OPS Model has been applied to assist with seasonal operations planning, including the SFWMD's monthly Position Analysis, proposed drawdown operations for East Lake Tohopekaliga, and testing the effects of hypothetical surface water withdrawals consistent with the draft Water Reservations rules. Some of these applications are summarized in this report to illustrate appropriate uses of the UK-OPS Model.

The UK-OPS Model and the draft version of this documentation report were peer-reviewed in November 2019. Recommendations for improving the draft documentation report were implemented to complete this final documentation report in March 2020. The model was deemed technically sound, appropriately developed, and usable for the intended applications. The reviewers made some suggestions for improving the model, many of which are under way, particularly the data extension through 2018. The peer-review reports are provided in Appendix D of the main report.

TABLE OF CONTENTS

2586	Executive Summary	C-4
2587	List of Tables	C-7
2588	List of Figures.....	C-8
2589	Acronyms and Abbreviations	C-10
2590	1 Introduction.....	C-11
2591	2 System Hydrology: Water Budget Approach.....	C-13
2592	2.1 System Overview	C-13
2593	2.2 East Lake Tohopekaliga	C-16
2594	2.3 Lake Tohopekaliga.....	C-18
2595	2.4 Lakes Kissimmee, Cypress, and Hatchineha.....	C-20
2596	2.5 Small Lakes in the Upper Kissimmee Basin	C-22
2597	3 Water Management Operating Rules	C-23
2598	3.1 Overview	C-23
2599	3.2 East Lake Tohopekaliga Regulation Schedule	C-23
2600	3.2.1 Hydraulic Capacity Assumptions for S-59.....	C-26
2601	3.2.2 Temporary Pump Capacity Assumptions for S-59.....	C-27
2602	3.2.3 Options for Simulating S-59 Operations.....	C-28
2603	3.3 Lake Tohopekaliga Regulation Schedule.....	C-28
2604	3.3.1 Hydraulic Capacity Assumptions for S-61.....	C-30
2605	3.3.2 Temporary Pump Capacity Assumptions for S-61.....	C-31
2606	3.3.3 Options for Simulating S-61 Operations.....	C-32
2607	3.4 Lakes Kissimmee, Cypress, and Hatchineha Regulation Schedule.....	C-32
2608	3.4.1 Hydraulic Capacity Assumptions for S-65 and S-65A	C-36
2609	4 Model Structure and Organization	C-36
2610	4.1 Overview and User Interface.....	C-36
2611	4.2 Operations Worksheets for Large Lake Systems	C-37
2612	4.2.1 KCHops Worksheet.....	C-37
2613	4.2.2 TOHops Worksheet.....	C-39
2614	4.2.3 ETOops Worksheet	C-40
2615	4.3 Operations Worksheets for Small Lake Systems	C-41
2616	4.3.1 HMJops Worksheet.....	C-41
2617	4.3.2 MPJops Worksheet.....	C-41
2618	4.3.3 ALCops Worksheet.....	C-42
2619	4.3.4 GENops Worksheet.....	C-42
2620	4.4 Routing Worksheets for Large Lake Systems.....	C-43
2621	4.4.1 ETOSim Worksheet.....	C-43
2622	4.4.2 TOHsim Worksheet.....	C-44
2623	4.4.3 KCHsim Worksheet	C-45
2624	4.5 Water Supply Worksheets for Small Lake Systems.....	C-46
2625	4.5.1 HMJws Worksheet.....	C-46
2626	4.5.2 MJPws Worksheet.....	C-46
2627	4.5.3 ALCws Worksheet	C-46
2628	4.5.4 GENws Worksheet.....	C-47
2629	4.6 Other Input Worksheets	C-47
2630		

2631	4.6.1	DATAforUKOPS Worksheet.....	C-47
2632	4.6.2	UKISSforUKOPS Worksheet	C-48
2633	4.6.3	AFETforUKOPS Worksheet.....	C-48
2634	4.6.4	S65TargetQSeries Worksheet	C-48
2635	4.6.5	StageStoArea Worksheet.....	C-48
2636	5	Model Output	C-49
2637	5.1	Measures of Performance	C-49
2638	5.2	Daily Stage and Flow Displays	C-50
2639	5.2.1	Hydrographs	C-50
2640	5.2.2	Stage and Flow Duration.....	C-51
2641	5.2.3	Stage and Flow Percentiles	C-52
2642	5.3	Hydrologic Performance Summaries	C-54
2643	5.3.1	Water Budgets	C-54
2644	5.3.2	Event Table and Plot	C-55
2645	5.3.3	Max D-day Inundation	C-55
2646	5.3.4	S-65 Annual Flow	C-56
2647	5.3.5	Water Supply Reliability.....	C-57
2648	5.3.6	Seasonal Distributions of Stage and Flow.....	C-58
2649	6	Model Validation	C-60
2650	6.1	Lake Stage Comparisons.....	C-60
2651	6.2	Water Budget Comparisons.....	C-63
2652	7	Applications.....	C-65
2653	7.1	SFWMD Position Analysis	C-65
2654	7.2	Sensitivity Analysis of Hypothetical Water Supply Withdrawals with Draft KRCOL	
2655		Water Reservation Rule Criteria.....	C-69
2656	7.2.1	Baseline Scenario	C-70
2657	7.2.2	Water Supply Withdrawal Scenario 1	C-70
2658	7.2.3	Water Supply Withdrawal Scenario 2	C-70
2659	7.2.4	Simulation Results.....	C-71
2660	8	Summary and Recommendations.....	C-77
2661		Literature Cited	C-78
2662		Attachment	C-79
2663			

2664 **LIST OF TABLES**

2665	Table 3-1.	Optional UK-OPS Model operations for S-59 and East Lake Tohopekaliga.	C-28
2666	Table 3-2.	Optional UK-OPS Model operations for S-61 and Lake Tohopekaliga.	C-32
2667	Table 4-1.	Optional UK-OPS Model operations for S-65 and Lakes Kissimmee, Cypress, and	
2668		Hatchineha.	C-38
2669	Table 4-2.	Optional UK-OPS Model operations for S-61 and Lake Tohopekaliga.	C-40
2670	Table 4-3.	Optional UK-OPS Model operations for S-59 and East Lake Tohopekaliga.	C-40
2671	Table 5-1.	Sample water supply reliability table for Lake Tohopekaliga.	C-58
2672	Table 7-1.	Lake Tohopekaliga water supply reliability for the WSmax scenario.	C-75
2673	Table 7-2.	Lake Tohopekaliga water supply reliability for the WSmaxL scenario.	C-76
2674			

LIST OF FIGURES

2675			
2676	Figure 2-1.	Map of the Upper Kissimmee Basin, highlighting the larger lake systems: East	
2677		Lake Tohopekaliga (ETO), Lake Tohopekaliga (TOH), and Lakes Kissimmee,	
2678		Cypress, and Hatchineha (KCH).....	C-14
2679	Figure 2-2.	Flow paths for the Upper Kissimmee Basin Chain of Lakes.....	C-15
2680	Figure 2-3.	User Interface for the Upper Kissimmee – Operations Simulation (UK-OPS)	
2681		Model.	C-16
2682	Figure 2-4.	East Lake Tohopekaliga water budget components simulated by the UK-OPS	
2683		Model.	C-17
2684	Figure 2-5.	Lake Tohopekaliga water budget components simulated by the UK-OPS Model.	C-19
2685	Figure 2-6.	Lakes Kissimmee, Cypress, and Hatchineha (KCH) water budget components	
2686		simulated by the UK-OPS Model.	C-21
2687	Figure 2-7.	Small lake systems and their connections to the large lake systems in the Upper	
2688		Kissimmee Basin.	C-22
2689	Figure 3-1.	East Lake Tohopekaliga regulation schedule.....	C-24
2690	Figure 3-2.	East Lake Tohopekaliga regulation schedule as seen by the UK-OPS Model.	C-25
2691	Figure 3-3.	East Lake Tohopekaliga zone discharge function used by the UK-OPS Model.....	C-25
2692	Figure 3-4.	Simultaneous gated spillway gravity flow and temporary pumping.....	C-27
2693	Figure 3-5.	Lake Tohopekaliga regulation schedule.	C-28
2694	Figure 3-6.	TOH regulation schedule as seen by the UK-OPS Model.	C-29
2695	Figure 3-7.	TOH zone discharge function used by the UK-OPS Model.	C-30
2696	Figure 3-8.	Pre-Kissimmee River Restoration Project regulation schedule for Lakes	
2697		Kissimmee, Cypress, and Hatchineha.....	C-33
2698	Figure 3-9.	Lakes Kissimmee, Cypress, and Hatchineha interim regulation schedule.....	C-33
2699	Figure 3-10.	Lake Kissimmee, Cypress, and Hatchineha authorized Headwaters Revitalization	
2700		regulation schedule.	C-34
2701	Figure 3-11.	Lakes Kissimmee, Cypress, and Hatchineha regulation schedule as seen by the	
2702		UK-OPS Model.....	C-35
2703	Figure 3-12.	Lakes Kissimmee, Cypress, and Hatchineha zone-discharge function used by the	
2704		UK-OPS Model.....	C-35
2705	Figure 4-1.	UK-OPS Model basic structure and data flow.....	C-37
2706	Figure 4-2.	Example of S-65 release rate limits for Lakes Kissimmee, Cypress, and	
2707		Hatchineha.	C-39
2708	Figure 4-3.	Stage-volume and stage-area relationships used by the UK-OPS Model.	C-49
2709	Figure 5-1.	Sample stage and discharge hydrographs for Lakes Kissimmee, Cypress, and	
2710		Hatchineha (top) and Lake Tohopekaliga (bottom).....	C-50
2711	Figure 5-2.	Sample stage duration curves for Lakes Kissimmee, Cypress, and Hatchineha.....	C-51
2712	Figure 5-3.	Sample flow duration curves for the S-65 structure.	C-52
2713	Figure 5-4.	Sample stage percentile plot for East Lake Tohopekaliga.....	C-53
2714	Figure 5-5.	Sample flow percentile plot for Lakes Kissimmee, Cypress, and Hatchineha flows	
2715		at the S-65 structure.	C-53
2716	Figure 5-6.	Sample water budgets for Lakes Kissimmee, Cypress, and Hatchineha and Lake	
2717		Tohopekaliga.	C-54
2718	Figure 5-7.	Sample event summary for Lake Tohopekaliga simulated stage.....	C-55
2719	Figure 5-8.	Sample maximum annual stage comparison at Lakes Kissimmee, Cypress, and	
2720		Hatchineha.	C-56
2721	Figure 5-9.	Sample event summary for Lake Tohopekaliga simulated stage.....	C-56
2722	Figure 5-10.	Sample annual flow statistics for the S-65 structure.....	C-57
2723	Figure 5-11.	Sample monthly stage distributions at Lakes Kissimmee, Cypress, and Hatchineha. ..	C-59
2724	Figure 5-12.	Sample monthly flow distributions at the S-65A structure.....	C-59

2725	Figure 6-1.	Simulated validation (red) and historical (black) hydrographs for 1965 to 1972.	C-61
2726	Figure 6-2.	Simulated validation (red) and historical (black) hydrographs for 2006 to 2013.	C-61
2727	Figure 6-3.	Lakes Kissimmee, Cypress, and Hatchineha stage duration curves: simulated	
2728		validation (red) and historical (black; directly behind red line).....	C-62
2729	Figure 6-4.	Lake Tohopekaliga stage duration curves: simulated validation (red) and historical	
2730		(black; directly behind red line).	C-62
2731	Figure 6-5.	East Lake Tohopekaliga stage duration curves: simulated validation (red) and	
2732		historical (black; directly behind red line).	C-63
2733	Figure 6-6.	Lakes Kissimmee, Cypress, and Hatchineha annual water budgets: historical (top)	
2734		and simulated validation (bottom).	C-64
2735	Figure 6-7.	Lake Tohopekaliga annual water budgets: historical (top) and simulated validation	
2736		(bottom).	C-64
2737	Figure 6-8.	East Lake Tohopekaliga annual water budgets: historical (top) and simulated	
2738		validation (bottom).	C-65
2739	Figure 7-1.	S-65 flow percentiles for the August 2019 position analysis.....	C-67
2740	Figure 7-2.	East Lake Tohopekaliga stage percentiles for the August 2019 position analysis.	C-67
2741	Figure 7-3.	Lake Tohopekaliga stage percentiles for the August 2019 position analysis.	C-68
2742	Figure 7-4.	Lakes Kissimmee, Cypress, and Hatchineha stage percentiles for the August 2019	
2743		position analysis.....	C-68
2744	Figure 7-5.	East Lake Tohopekaliga regulation schedule with proposed water reservation line	
2745		(red dashed line).....	C-69
2746	Figure 7-6.	Lake Tohopekaliga regulation schedule with proposed water reservation line (red	
2747		dashed line).	C-70
2748	Figure 7-7.	Lake Okeechobee constraint used by the UK-OPS Model.	C-71
2749	Figure 7-8.	Water budget comparison of WSmax and WSmaxL for Lake Tohopekaliga.	C-72
2750	Figure 7-9.	Lake Tohopekaliga stage percentiles for the Base, WSmax, and WSmaxL	
2751		scenarios.....	C-73
2752	Figure 7-10.	Mean annual flow at the S-65 structure under the WSmax scenario.	C-74
2753			

2754

ACRONYMS AND ABBREVIATIONS

2755		
2756	AFET	Alternative Formulation and Evaluation Tool
2757	ALC	Alligator Chain of Lakes
2758	cfs	cubic feet per second
2759	DPA	dynamic position analysis
2760	ET	evapotranspiration
2761	ETO	East Lake Tohopekaliga
2762	GEN	Lake Gentry
2763	GUI	graphical user interface
2764	HMJ	Lakes Hart and Mary Jane
2765	KCH	Lakes Kissimmee, Cypress, and Hatchineha
2766	KRCOL	Kissimmee River and Chain of Lakes
2767	KRRP	Kissimmee River Restoration Project
2768	MPJ	Lakes Myrtle, Preston, and Joel
2769	NGVD29	National Geodetic Vertical Datum of 1929
2770	RF	rainfall
2771	SFWMD	South Florida Water Management District
2772	SFWMM	South Florida Water Management Model
2773	SPF	standard project flood
2774	TOH	Lake Tohopekaliga
2775	UK-OPS	Upper Kissimmee – Operations Simulation (Model)
2776	UKB	Upper Kissimmee Basin
2777	UKISS	Upper Kissimmee Chain of Lakes Routing Model
2778	WNI	watershed net inflow
2779	WRL	water reservation line
2780		

1 INTRODUCTION

The development, application, and maintenance of computer simulation models have been part of the overall strategy adopted by the South Florida Water Management District (SFWMD) to manage the complex water resources in Central and South Florida. Several regional models have been deployed over the past decades to support state and federal planning initiatives, including the Comprehensive Everglades Restoration Plan, the Lower East Coast Water Supply Plan, the Northern Everglades Plan, and Lake Okeechobee Operations Planning efforts.

In 2014, the SFWMD recognized the need for a model that would allow rapid testing and evaluation of alternative water management operations in the Upper Kissimmee Basin (UKB). The primary concern was improvement of the flow regime to the Kissimmee River Restoration Project (KRRP) to better meet restoration targets. Such improvement depends on modification of operations that control water levels in the three largest lakes/lake groups in the UKB: Lakes Kissimmee, Cypress, and Hatchineha (KCH); Lake Tohopekaliga (TOH); and East Lake Tohopekaliga (ETO). To meet this need, the SFWMD developed the Upper Kissimmee – Operations Simulation (UK-OPS) Model. The UK-OPS Model initially was developed using Microsoft Excel® 2013 (v15.0) and has been used for several years by modelers, engineers, and scientists. The model has been modified primarily to increase the options for specifying operations in KCH and to evaluate potential surface water withdrawals consistent with the draft Kissimmee River and Chain of Lakes (KRCOL) Water Reservations rules. The most recent version, and the subject of this report, is UK-OPS (v3.12).

The UK-OPS Model performs daily timestep, continuous simulations of the hydrology and operations of the UKB portion of Central and South Florida’s water management system for either period-of-record simulations (continuous 49 years) or position analysis simulations (49 one-year simulations, each with the same initial conditions). It has a run time of approximately 4 minutes.

The UK-OPS Model has some limitations. Hydrologic routing is limited to KCH, TOH, and ETO. The inflow series from the smaller lakes are assumed boundary conditions; thus, operations of those lakes are not simulated. Furthermore, although the UK-OPS Model simulates flows to the Kissimmee River at the S-65 and S-65A structures, it does not simulate the complexity of flows and stages within the Kissimmee River and the Lower Kissimmee Basin. The model does not simulate the rainfall-runoff process, rather it relies on the historical record or a detailed model for simulating lateral inflows to the lakes. Detailed hydraulic computations are not performed; instead, the UK-OPS Model approximates the structure stage-discharge hydraulics. Consequently, the UK-OPS Model is not a replacement for the detailed regional hydrologic and water management simulation models that traditionally have been used for analysis and planning of South Florida’s water resources.

Detailed hydrologic models, such as the Regional Simulation Model – Basins (VanZee 2011) and the Mike 11/Mike SHE application to the UKB and Lower Kissimmee Basin (SFWMD 2017), are essential for comprehensive analysis of existing and future components of the water management system. Although detailed regional models are the best available tools for performing finer-scale evaluations, they are not suitable for quickly testing a broad range of alternative operations and/or water withdrawal configurations. The UK-OPS Model complements the more detailed models by screening possible alternatives through rapid simulation and evaluation so the detailed models can focus on fewer, more promising alternatives.

UK-OPS Model input requirements include: 1) regulation schedule zones and release rules for KCH, TOH, and ETO; and 2) daily time series (currently 1965 to 2013) of lake stages, inflows, outflows, and evaporation, which are used with the varying lake surface areas to calculate evapotranspiration (ET) volume. Most of these time-series inputs come from historical data or simulated values from detailed regional models.

UK-OPS Model outputs include: 1) typical hydrologic model outputs for the primary lakes—yearly water budgets, daily stage and discharge hydrographs to facilitate in-depth comparative analyses, stage and flow duration curves, and stage and flow percentile plots; and 2) hydrologic performance indicators to summarize and compare key measures among alternative plans/scenarios—reduction in annual mean flow at S-65 to evaluate impacts on the proposed KRCOL Water Reservations, water supply withdrawal reliability, and summaries of maximum stages occurring for user-specified durations.

This report provides readers with a broad view of the basic capabilities and limitations of the UK-OPS Model as well as the details of the algorithms used to simulate the hydrology and water management of the system. This report is not intended to be a comprehensive user’s manual for appropriate use of the model and does not contain that level of detail. Furthermore, because initial development of the UKOPS Model focused on immediate applications, efforts were not spent on making the model user-friendly. The model does not contain limits on parameter values or warnings to caution users when results may not be realistic; therefore, the model should be used with substantial professional judgement. Future development efforts may expand and improve the user interfaces. Reading this document is necessary to understand the UK-OPS Model. To use the UK-OPS Model in its current form, interactive training may be necessary.

The need to document and peer review the UK-OPS Model arose in 2019 during the planning effort for the proposed KRCOL Water Reservations rule. Preparation of the draft report was expedited by the Modeling Section of the Hydrology and Hydraulics Bureau of the SFWMD. Recommendations from the formal external peer review were implemented and are reflected in this final report.

This report is organized into the following sections:

1. *Introduction* – A broad summary of the UK-OPS Model and the purpose and structure of this report.
2. *System Hydrology: Water Budget Approach* – An overview of the model domain, system interconnectivity, and the subsystem components, using diagrams and the continuity equation. Data needs and sources also are presented.
3. *Water Management Operating Rules* – The regulation schedules and release rules for the primary lakes: KCH, TOH, and ETO. Options for changing operating regimes also are described.
4. *Model Structure and Organization* – An overview of the organization of the worksheets; explanations of each primary worksheet, including user interfaces; and the general data flow between worksheets.
5. *Model Output* – Various graphical and tabular display summaries of simulated performance that enable evaluation of the simulations.
6. *Model Validation* – Comparison of the UK-OPS Model output with historical data to demonstrate the accuracy of the routing algorithms.
7. *Applications* – UK-OPS Model implementations, including the monthly Position Analysis and scenarios examined to support the proposed KRCOL Water Reservations. These applications represent typical appropriate uses of the UK-OPS Model.
8. *Summary and Recommendations* – Summary of model strengths and limitations and suggestions for future enhancements to improve model accuracy and utility.

2 SYSTEM HYDROLOGY: WATER BUDGET APPROACH

The UK-OPS Model uses a simple water balance approach to simulate the water levels and discharges for the primary hydrologic components of the larger lake systems in the UKB (**Figure 2-1**). This section presents an overview of the system simulated by the model, the subsystems, and their interactions. Also described in this section are the details of the hydrologic components for each subsystem. The specific operating rules and routing procedures used by the UK-OPS Model are presented in **Sections 3** and **4**, respectively.

2.1 System Overview

The SFWMD is the largest of the five water management districts created in 1972 by the Florida Water Resources Act (Chapter 373, Florida Statutes). Within the SFWMD boundaries, from Orlando to the Florida Keys, are 18,000 square miles and a current (2019) population of more than 8.7 million residents. The SFWMD oversees the water resources of the region, and its primary responsibilities include regional flood control, water supply, water quality protection, and ecosystem restoration.

The UKB is the northernmost watershed in the SFWMD and is the headwaters to the Kissimmee-Okeechobee-Everglades ecosystem. Within the UKB, the SFWMD manages the water levels in seven groups of lakes; the three largest are KCH, TOH, and ETO (**Figure 2-1**). Water is discharged from the UKB at S-65 to manage water levels in the upstream lakes and to provide flow to the Kissimmee River and the KRRP. Except for very dry periods, the flow at S-65 eventually is discharged to Lake Okeechobee via S-65E. The S-65A structure receives runoff from the basin bounded by S-65 to S-65A and is the structure regulating inflow to the KRRP. Thus, the operation of S-65A is also important to the KRRP.

The UK-OPS Model simulates the primary water budget components for KCH, TOH, and ETO within the UKB. **Sections 2.2** to **2.4** describe the methodology used by the model for these lakes. **Section 2.5** describes the simulation methodology used by the current version of the UK-OPS Model for the smaller lake systems.

Figure 2-2 shows the flow paths through the UKB Chain of Lakes and the associated water control structures that serve as outlets from each lake or lake system. Outflows from the northern branch of the chain via TOH at S-61 flow to Cypress Lake, which also receives outflow from the eastern branch of the chain from Lake Gentry (GEN) via S-63A. Outflow from Cypress Lake travels through Lake Hatchineha to Lake Kissimmee, which is the largest lake in the UKB. Water from Lake Kissimmee is released to the Kissimmee River via S-65.

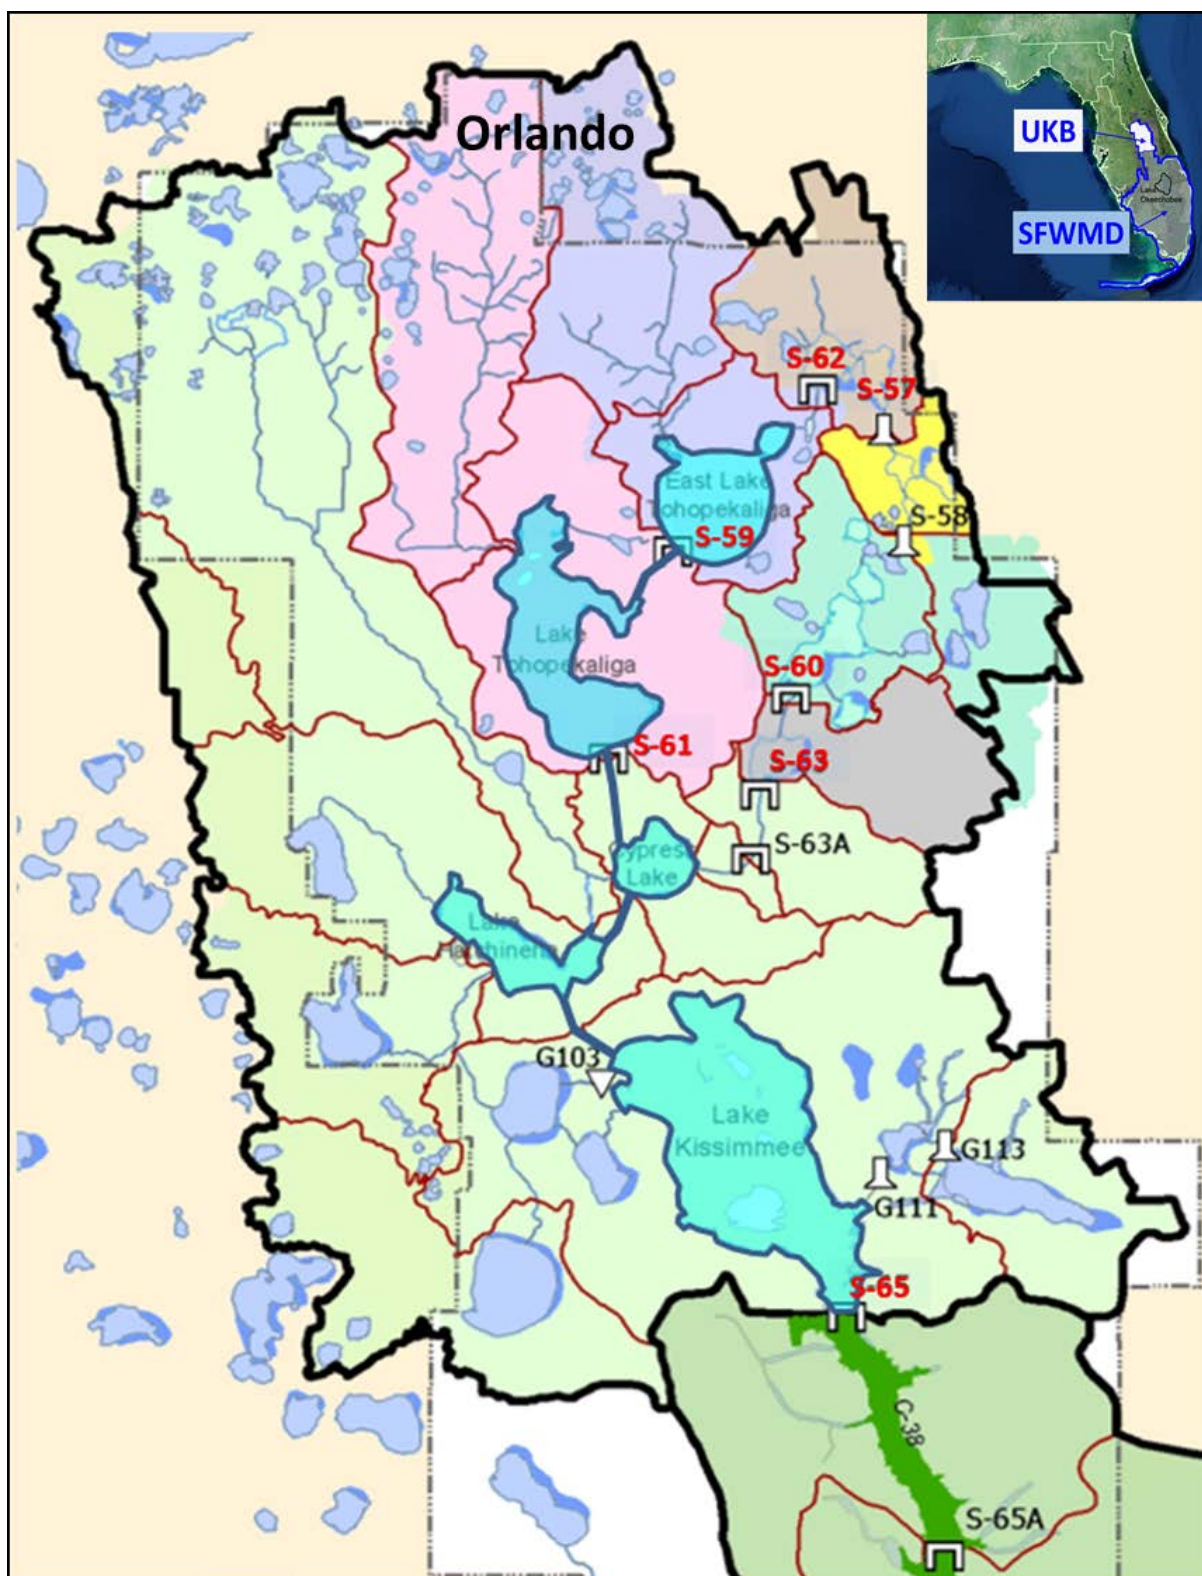


Figure 2-1. Map of the Upper Kissimmee Basin, highlighting the larger lake systems: East Lake Tohopekaliga (ETO), Lake Tohopekaliga (TOH), and Lakes Kissimmee, Cypress, and Hatchineha (KCH).

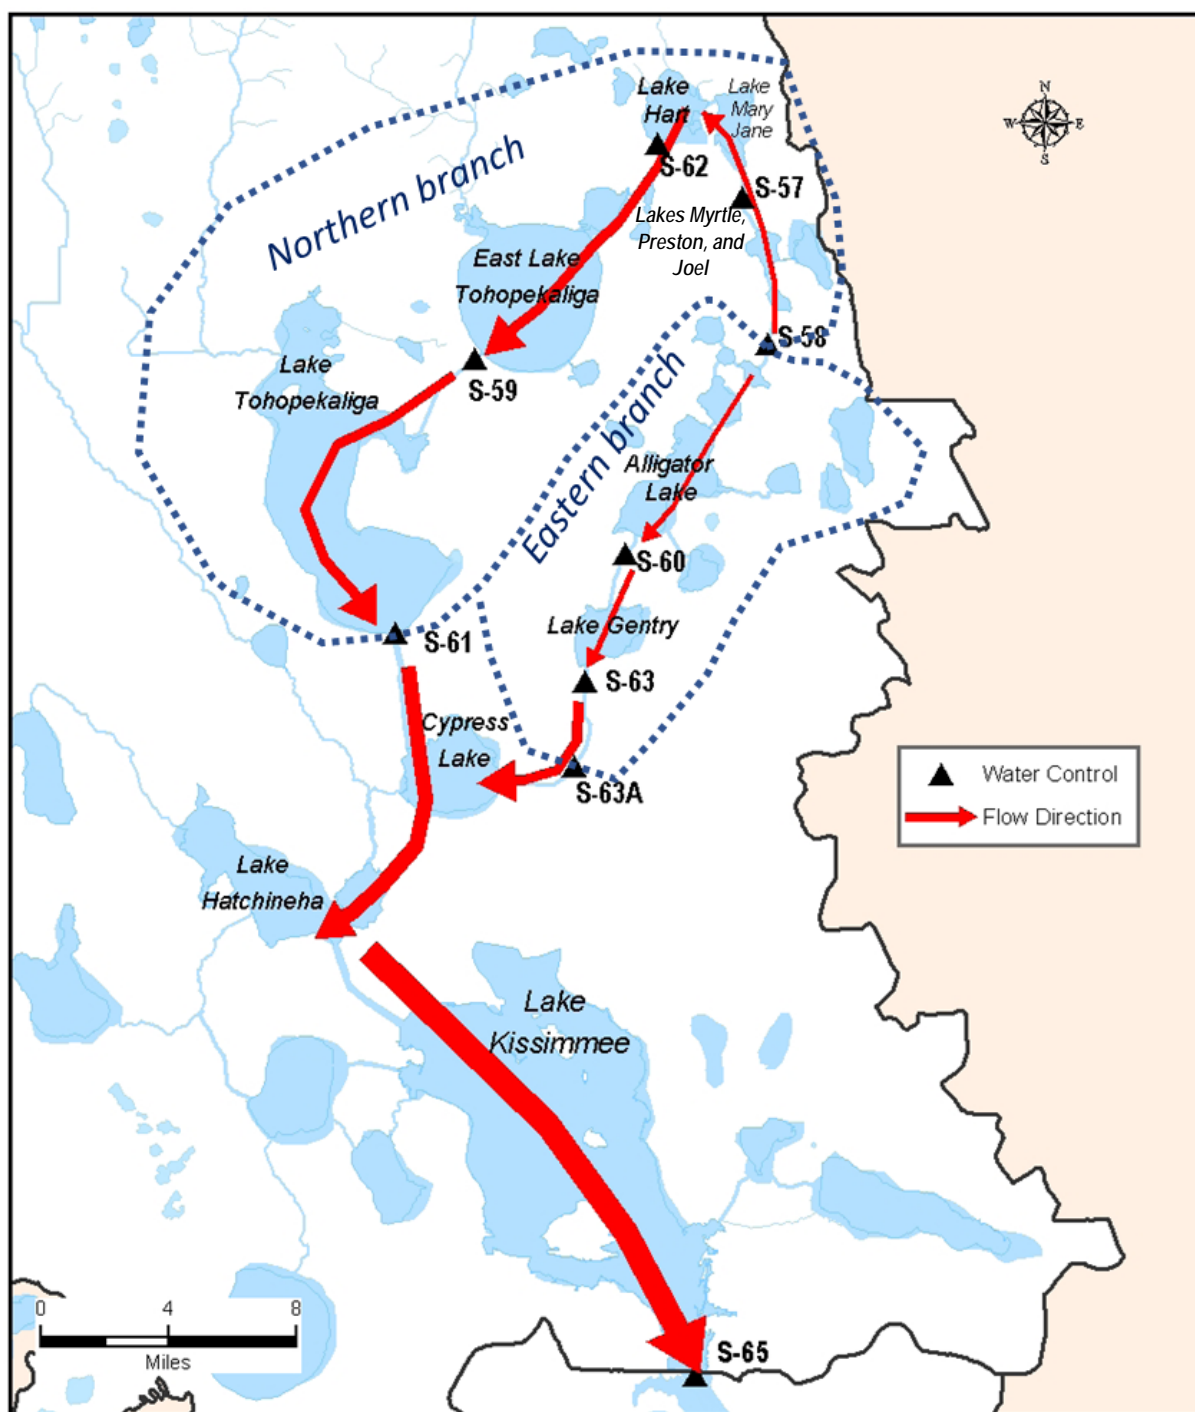


Figure 2-2. Flow paths for the Upper Kissimmee Basin Chain of Lakes.

Figure 2-3 shows the primary user interface of the UK-OPS Model, a Microsoft Excel® application that enables the user to set-up a modeling scenario, run it, and automatically generate numerous post-simulation outputs. The majority of output summaries, including performance summary graphics, can be accessed via this interface. The map is interactive and allows selection of the lake systems to be included in the simulation. The Simulation Scenario Manager allows the user to select the simulation type (continuous or position analysis) and to retrieve and/or run up to four scenarios.

Figure 2-3. User Interface for the Upper Kissimmee – Operations Simulation (UK-OPS) Model.

The remainder of **Section 2** provides a general description of the main water bodies (East Lake Tohopekaliga, Lake Tohopekaliga, Lakes Kissimmee-Cypress-Hatchineha, and the Kissimmee River) and the derivations of the routing, or continuity equations used by the UK-OPS Model. The smaller lakes in the UKB are partially simulated by the UK-OPS Model. Routing is not performed for the smaller lakes in the current version of the model. **Section 2.5** describes the features of the smaller lakes that are included.

2.2 East Lake Tohopekaliga

ETO is the northernmost of the three largest lake systems in the UKB. At the highest stage allowed by the regulation schedule (i.e., winter pool elevation) of 58.0 feet National Geodetic Vertical Datum of 1929 (NGVD29), the surface area of ETO is approximately 12,900 acres. Inflows are from the ETO drainage basin, including Boggy Creek and its drainage basin to the north. Managed inflows via the S-62 gated spillway are from Lakes Hart and Mary Jane (HMJ) to the northeast. Managed outflows are via the S-59 gated spillway, which flows southwest to TOH.

The continuity equation used by the UK-OPS Model to describe the ETO water budget is as follows (and graphically displayed in **Figure 2-4**):

$$\Delta S = RF - ET + WNI + S62 - S59 - [WS] \quad (2.2.1)$$

Where the terms of the water budget (in acre-feet per day) are defined as:

ΔS = change in lake storage

RF = rainfall volume over lake surface area (lumped with WNI)

ET = evapotranspiration volume over variable lake surface area

WNI = watershed net inflow (WNI lumps all other terms of the water budget, including tributary inflows, overland flow, groundwater fluxes, and other inflows and outflows assumed to not change in the simulations.)

S62 = inflow from upstream HMJ

S59 = simulated outflow from ETO

[WS] = optional simulated water supply withdrawal from ETO

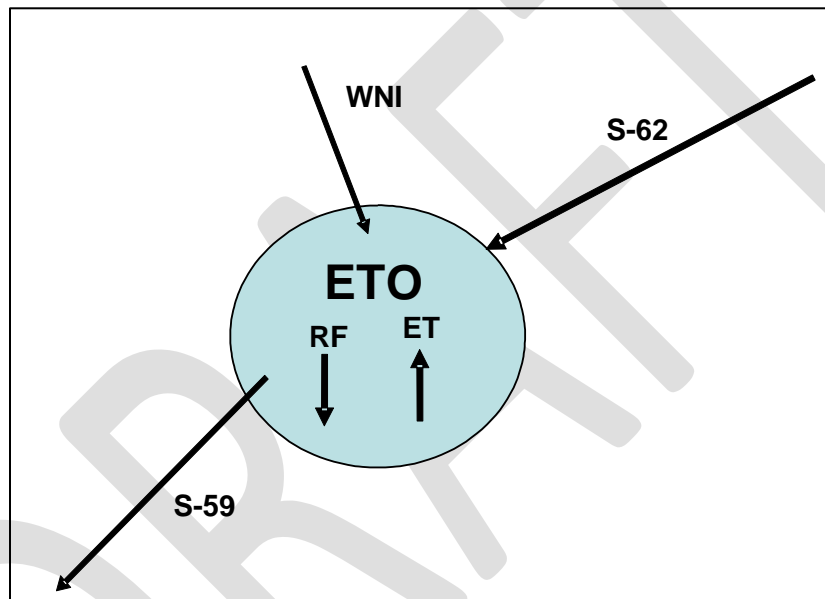


Figure 2-4. East Lake Tohopekaliga water budget components simulated by the UK-OPS Model.

The UK-OPS Model simulates S-59 releases, ET, storage change, and corresponding lake stage using the stage-storage relationship. In the current model, S-62 is an inflow boundary condition based on historical flow data. WNI+RF is an assumed persistent time series for each simulation and an input to the model. The WNI+RF values are preprocessed from historical flow data or from a detailed hydrologic simulation model like the Mike 11/Mike SHE (SFWMD 2017). Based on the continuity equation, and by knowing all the remaining terms of the water budget, WNI+RF can be computed as follows (with WS = 0):

$$\Delta S = (WNI + RF) - ET + S62 - S59$$

Solving this equation for WNI+RF yields:

$$WNI + RF = \Delta S + ET - S62 + S59 \quad (2.2.2)$$

2943 Where all terms are daily volumes obtained from historical data or the supporting, detailed hydrologic
2944 model and are defined as follows:

2945 WNI+RF = watershed net inflow plus rainfall volume over the lake surface area; calculated once and
2946 assumed to be a persistent time series for each simulation

2947 $\Delta S = S(h_{t+1}) - S(h_t)$ = change in lake storage during the daily time step; calculated using lake stages and
2948 the lake stage-storage relationship

2949 $ET = e_t \cdot A(h_{t-1})$ = evapotranspiration volume; where e_t is the daily evapotranspiration depth and $A(h_{t-1})$
2950 is the lake surface area for the previous day calculated using the lake stage-area relationship

2951 S62 = inflow from upstream HMJ

2952 S59 = outflow from ETO

2953 Once the WNI+RF series is calculated, it is unchanged for UK-OPS Model runs, which simulates the other
2954 water budget terms using **Equation 2.2.1**.

2955 **2.3 Lake Tohopekaliga**

2956 TOH is the second largest lake system in the UKB. At winter pool elevation of 55.0 feet NGVD29, the
2957 surface area is approximately 22,000 acres. Inflows are from the TOH drainage basin, including Shingle
2958 Creek and its drainage basin to the north. Managed inflows via the S-59 gated spillway are from ETO to
2959 the northeast. Managed outflows are via the S-61 gated spillway, which flows south to Cypress Lake.

2960 The continuity equation used by the UK-OPS Model to describe the TOH water budget is as follows (and
2961 graphically displayed in **Figure 2-5**):

$$2962 \quad \Delta S = RF - ET + WNI + S59 - S61 - [WS] \quad (2.3.1)$$

2963 Where the terms of the water budget (in acre-feet per day) are defined as:

2964 ΔS = change in lake storage

2965 RF = rainfall volume over lake surface area (lumped with WNI)

2966 ET = evapotranspiration volume over variable lake surface area

2967 WNI = watershed net inflow (WNI lumps all other terms of the water budget, including tributary
2968 inflows, overland flow, groundwater fluxes, and other inflows and outflows assumed to not change in
2969 the simulations.)

2970 S59 = simulated inflow from upstream ETO

2971 S61 = simulated outflow from TOH

2972 [WS] = optional simulated water supply withdrawal from TOH

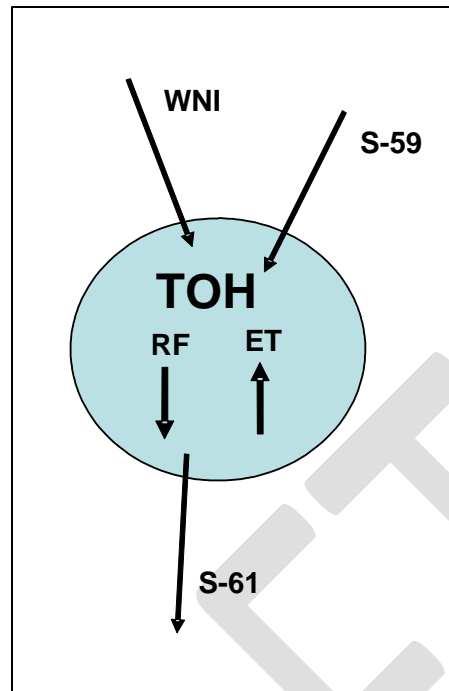


Figure 2-5. Lake Tohopekaliga water budget components simulated by the UK-OPS Model.

The UK-OPS Model simulates all the water budget components except RF and WNI, which are added to become the term WNI+RF. WNI+RF is an assumed, persistent time series for each simulation and is an input to the model. The WNI+RF values are preprocessed from historical flow data or from a detailed hydrologic simulation model like the Mike 11/Mike SHE (SFWMD 2017). Based on the continuity equation, and by knowing all the remaining terms of the water budget, WNI+RF can be computed as follows (with WS = 0):

$$\Delta S = (WNI + RF) - ET + S59 - S61$$

Solving this equation for WNI+RF yields:

$$WNI + RF = \Delta S + ET - S59 + S61 \quad (2.3.2)$$

Where all terms are daily volumes obtained from historical data or the supporting, detailed hydrologic model and are defined as follows:

WNI+RF = watershed net inflow plus rainfall volume over the lake surface area; calculated once and assumed a persistent time series for each simulation

$\Delta S = S(h_{t+1}) - S(h_t)$ = change in lake storage during the daily time step; calculated using lake stages and the lake stage-storage relationship

$ET = e_t \cdot A(h_{t-1})$ = evapotranspiration volume; where e_t is the daily evapotranspiration depth and $A(h_{t-1})$ is the lake surface area for the previous day calculated using the lake stage-area relationship

S59 = inflow from upstream ETO

S61 = outflow from TOH

2994 Once the WNI+RF series is calculated, it is unchanged for UK-OPS Model runs, which simulates the other
 2995 water budget terms using **Equation 2.3.1**.

2996 **2.4 Lakes Kissimmee, Cypress, and Hatchineha**

2997 KCH is the largest of the lake systems in the UKB. The three lakes of the KCH system are operated as a
 2998 single water body because there are no intermediate water control structures in the system. The UK-OPS
 2999 Model simulates the system as a single lake. At the current winter pool elevation of 52.5 feet NGVD29, the
 3000 surface area is approximately 61,000 acres. Inflows are from the KCH drainage basins, including Reedy
 3001 Creek and its drainage basin to the north. Managed inflows are from TOH to the northeast via the S-61
 3002 gated spillway and from eastern portion of the UKB Chain of Lakes via S-63A. Managed outflows from
 3003 KCH are via the S-65 gated spillway, which flows south to the Kissimmee River.

3004 The continuity equation used by the UK-OPS Model to describe the KCH water budget is as follows (and
 3005 graphically displayed in **Figure 2-6**):

$$3006 \qquad \qquad \qquad \Delta S = [RF + WNI + S63A] - ET + S61 - S65 \qquad \qquad \qquad (2.4.1)$$

3007 Where the terms of the water budget (in acre-feet per day) are defined as:

3008 ΔS = change in lake storage

3009 RF = rainfall volume over lake surface area (lumped with WNI)

3010 ET = evapotranspiration volume over variable lake surface area

3011 WNI = watershed net inflow (WNI lumps all other terms of the water budget, including tributary
 3012 inflows, overland flow, groundwater fluxes, and other inflows and outflows assumed to not change in
 3013 the simulations.)

3014 S61 = simulated inflow from upstream TOH

3015 S63A = boundary condition inflow from GEN and the southeastern portion of the UKB Chain of Lakes
 3016 (Note: This term is assumed to not change with the simulations. It is not explicitly used and is implicitly
 3017 part of WNI.)

3018 S65 = simulated outflow to the Kissimmee River

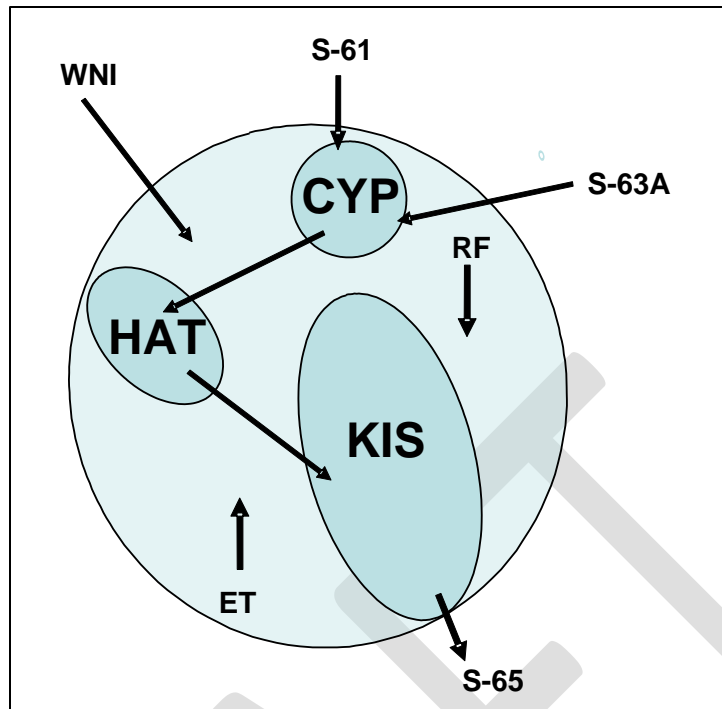


Figure 2-6. Lakes Kissimmee, Cypress, and Hatchineha (KCH) water budget components simulated by the UK-OPS Model.

The UK-OPS Model simulates all the water budget components except for S-63A, RF, and WNI. Flow from S-63A is a boundary condition. S-63A flow is assumed to be the same as historical, or the same as that simulated by the detailed hydrologic model (e.g., the Mike 11/Mike SHE). RF and WNI are added to become the term WNI+RF, which is an assumed, persistent time series for each simulation and is an input to the model. The WNI+RF values also are preprocessed from historical flow data or from the supporting, detailed hydrologic simulation model. Based on the continuity equation, and by knowing all the remaining terms of the water budget, WNI+RF is computed as follows:

$$\Delta S = (WNI + RF) - ET + S61 - S65 \text{ (S63A is part of WNI)}$$

Solving this equation for WNI+RF yields:

$$WNI + RF = \Delta S + ET - S61 + S65 \quad (2.4.2)$$

Where all terms are daily volumes obtained from historical data or the supporting, detailed hydrologic model and are defined as follows:

WNI+RF = watershed net inflow plus rainfall volume over the lake surface area; calculated once and assumed a persistent time series for each simulation

$\Delta S = S(h_{t+1}) - S(h_t)$ = change in lake storage during the daily time step; calculated using lake stages and the lake stage-storage relationship

$ET = e_t \cdot A(h_{t-1})$ = evapotranspiration volume; where e_t is the daily evapotranspiration depth and $A(h_{t-1})$ is the lake surface area for the previous day calculated using the lake stage-area relationship

S61 = inflow from TOH

S65 = outflow to the Kissimmee River

Once the WNI+RF series is calculated, it is unchanged for UK-OPS Model runs, which simulates the other water budget terms using **Equation 2.4.1**.

2.5 Small Lakes in the Upper Kissimmee Basin

This section describes the approach used in the UK-OPS Model for the small lakes that are connected and contribute inflow to the larger lake systems described in **Sections 2.2 to 2.4**. The small lake systems include HMJ; Lakes Myrtle, Preston, and Joel (MPJ); the Alligator Chain of Lakes (ALC); and GEN. **Figure 2-2** shows the flow paths and proximity of the small lake systems to the larger systems. **Figure 2-7** shows how the smaller lake systems connect to the larger systems.

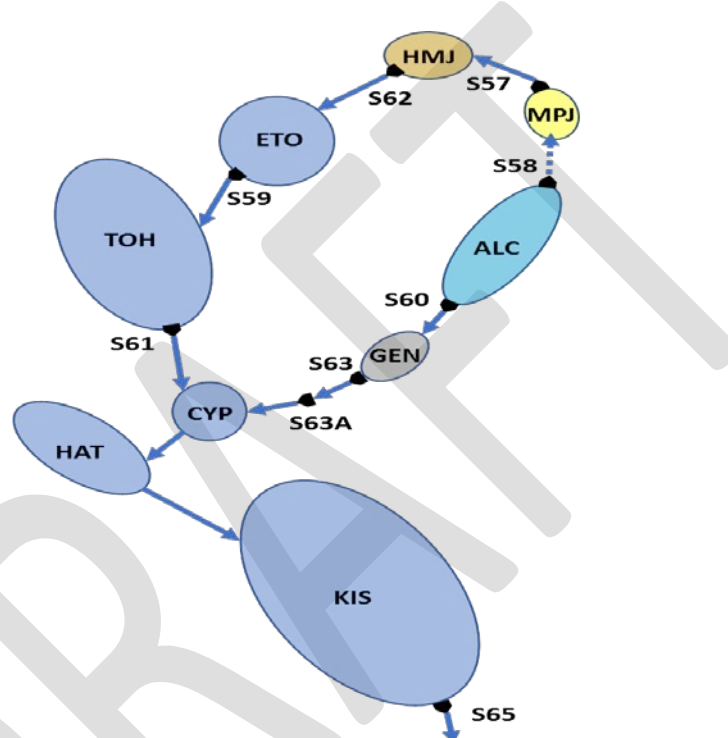


Figure 2-7. Small lake systems and their connections to the large lake systems in the Upper Kissimmee Basin.

Outflows from the small lakes generally end up in Lake Cypress. Outflows from ALC can move south via the S-60 gated spillway or north via the S-58 gated culvert. For larger flows, the southern route typically is used because it has higher capacity. The model does not simulate outflows from the small lakes. However, for evaluating water supply withdrawals from the small lakes, the model assumes flows from ALC and GEN are to Lake Cypress (KCH system) and flows from MPJ and HMJ are to ETO.

The UK-OPS Model partially simulates the small lake systems; no routing is performed for these lakes. For operations planning simulations, which usually involve only the larger lakes, the hydrology of the small lake systems is not important because the outflows from these lakes are implicitly part of the WNI term. For evaluating proposed surface water withdrawal scenarios subject to the draft KRCOL Water Reservation rules, an approximation was made, as described below.

The draft KRCOL Water Reservation rules were designed to allow water supply withdrawals to occur when they do not adversely impact the water resources and associated ecology of the lake systems and the KRRP. The rules basically define constraints that determine when water supply withdrawals can occur.

To evaluate the effects of surface water withdrawals under the draft KRCOL Water Reservation rules, the UK-OPS Model compared the small lake stage series with the water reservation line (WRL) (**Section 4.3**). If the lake stage is above the WRL and the other rule criteria are met, then water supply withdrawals can occur. Recognizing the withdrawal may reduce outflow from the small lake system and affect the downstream large lake system, the UK-OPS Model assumes the withdrawal is directly from the downstream large lake system. Therefore, for withdrawals from MPJ and/or HMJ, the simulation determines the timing of the withdrawal using the stage and WRL of the small lake but makes the withdrawal from ETO. And for withdrawals from ALC and/or GEN, the simulation determines the timing of the withdrawal using the stage and WRL of the small lake but makes the withdrawal from KCH.

This simplifying assumption, to make the withdrawal from the next downstream large lake, was made for expediency and with recognition that building full routing capability for four more lake systems would add significantly to the computational burden of this Microsoft Excel® model. Building routing capability for the small lakes is a possible future improvement to the UK-OPS Model, but the likely minor increased benefit should be weighed with the increased computational burden and slower run times.

3 WATER MANAGEMENT OPERATING RULES

3.1 Overview

The UK-OPS Model simulates the management of releases from the larger lake systems in the UKB using rules that mimic the regulation schedules and associated release guidance criteria. This section describes these rules and their implementation in the model. Also presented in this section are some of the options built into the model for simulating alternative release strategies.

3.2 East Lake Tohopekaliga Regulation Schedule

The ETO regulation schedule (**Figure 3-1**) specifies releases at S-59 based on lake stage. The ETO regulation schedule rules traditionally have been designed to simply discharge water whenever the lake stage is above the schedule (Zone A). Releases in Zone B can be made for environmental purposes, navigation, and water supply, but are not necessary to manage the lake stage.

Figure 3-2 illustrates the ETO regulation schedule as seen by the UK-OPS Model. Up to six zones can be defined. The zones are numbered, and the labeled lines represent the bottom of each zone. The green line (Zone 4) represents the drawdown operation used in 2018 and 2019 to benefit in-lake fish and wildlife resources. The drawdowns initiated at an elevation of 57.60 feet NGVD29 on January 15. The dashed line (Zone 6) represents a 0.3-foot offset above the Zone A line (Zone 5) that can be used to transition flows up to the maximum discharge. The model can simulate a linear transition from zero to maximum discharge in this range, if specified.

The UK-OPS Model uses a zone-discharge function to specify discharge rates within the regulation schedule zones. Consistent with the regulation schedule zone labeling, the zone-discharge function places the zone number at the bottom of the zone. For ETO (**Figure 3-3**), the function is relatively simple. Zero discharge for all zones below Zone 4. Within Zone 4 (between the green line and the Zone 5 black line in **Figure 3-2**), discharge linearly increases with stage from 750 to 1,300 cubic feet per second (cfs). Above Zone 5, continue with 1,300 cfs, which is the maximum S-59 capacity assumed by the model. In this case, there is no transition specified for Zone 5. For stages above the Zone 5 line (same as bottom of Zone A), the model simulates the maximum hydraulic capacity of S-59, considering the headwater and tailwater stages approximated by the simulated stages in ETO and TOH, respectively. Note from **Figure 3-1**, the stated S-59 design capacity is 820 cfs, which is less than the 1,300 cfs maximum capacity in **Figure 3-3**.

3108 The standard project flood (SPF) discharge rate for S-59 is 1,300 cfs, which can be reached under high
 3109 stage conditions. The model simulates this capability even though it exceeds the design, which is based on
 3110 30% of the SPF discharge rate.

3111 UK-OPS Model users can specify the breakpoints of the ETO regulation schedule and the zone-discharge
 3112 function by changing the values in the color-coded tables within the ETOops worksheet. The regulation
 3113 schedule and the zone-discharge function graphics automatically display changes to the inputs to enable
 3114 verification of the intended changes.

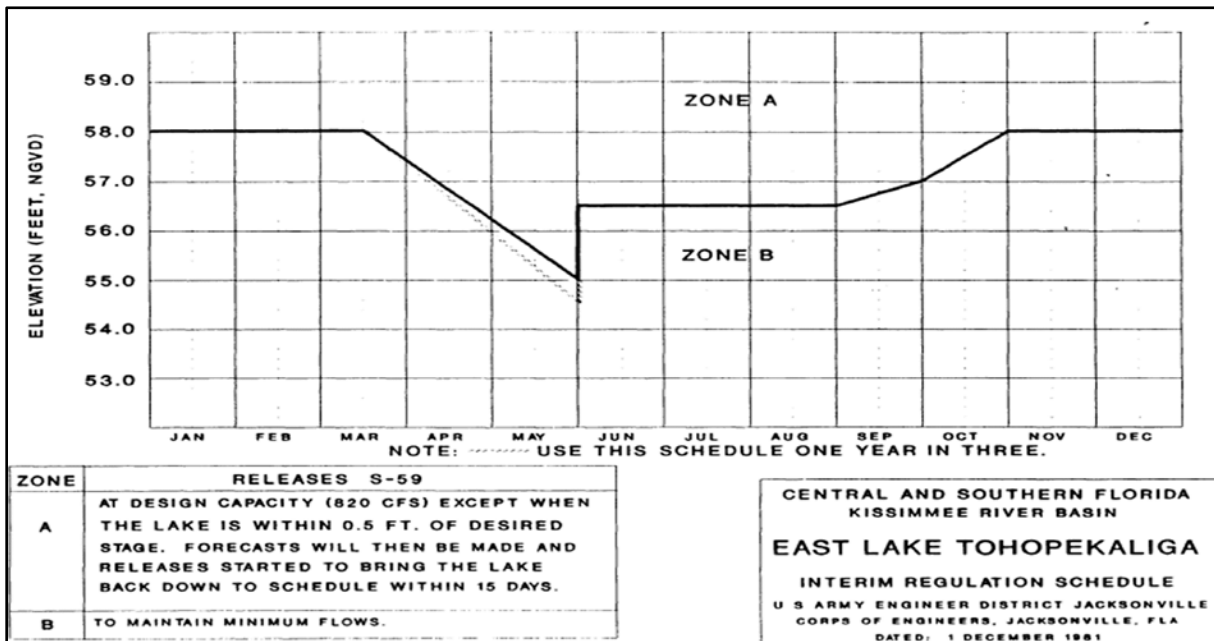


Figure 3-1. East Lake Tohopekaliga regulation schedule.

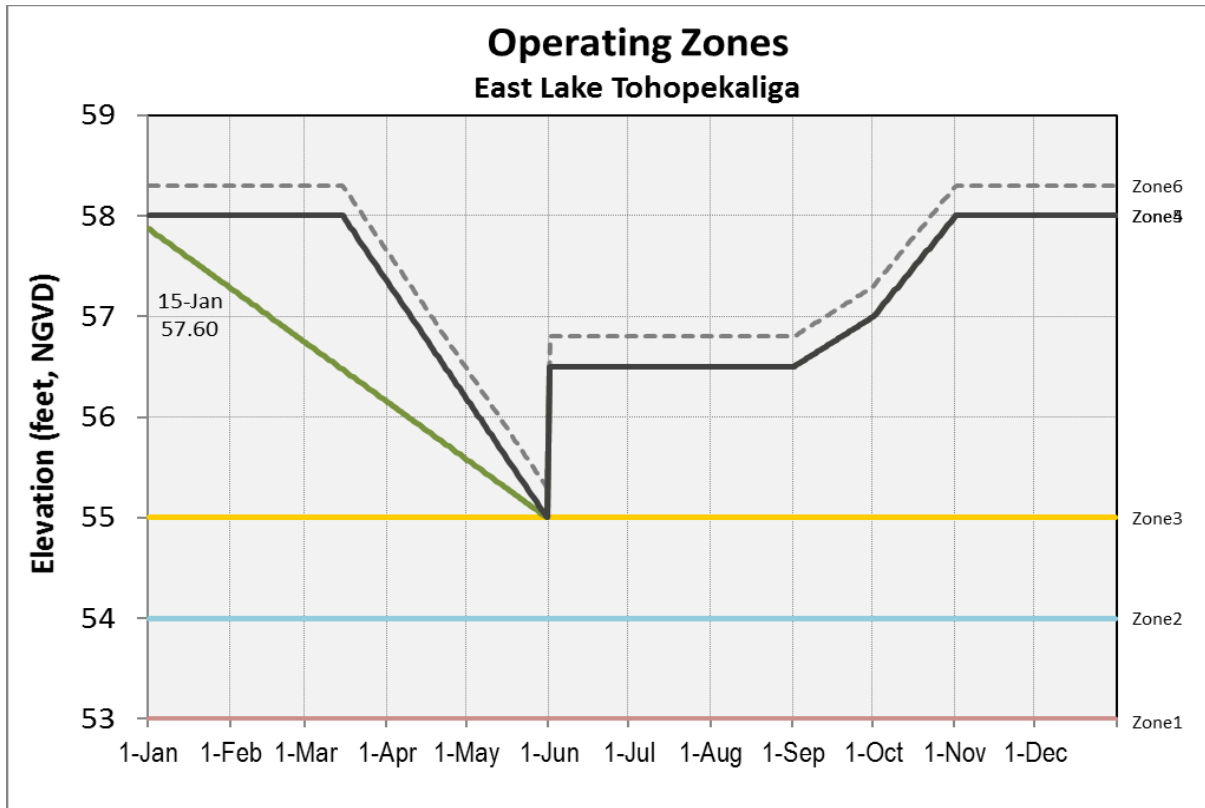


Figure 3-2. East Lake Tohopekaliga regulation schedule as seen by the UK-OPS Model.

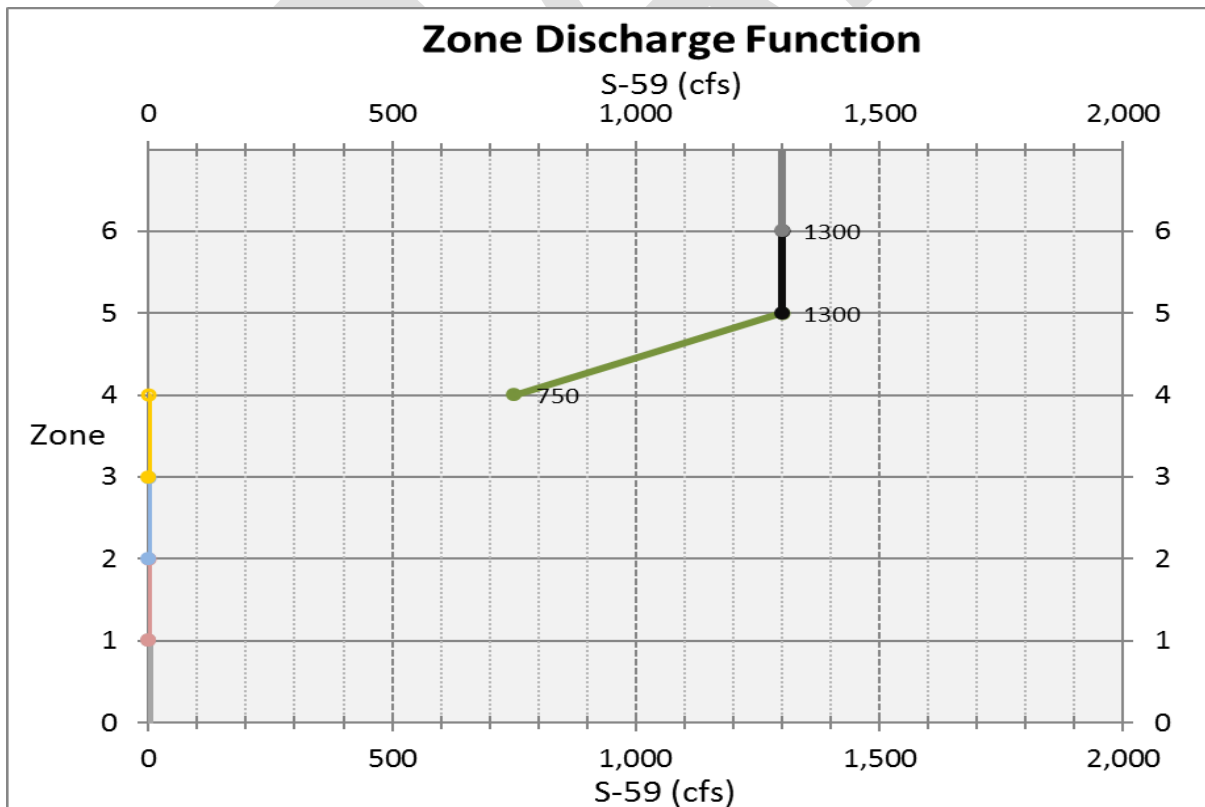


Figure 3-3. East Lake Tohopekaliga zone discharge function used by the UK-OPS Model.

3.2.1 Hydraulic Capacity Assumptions for S-59

The S-59 single-gated spillway capacity (100% of the SPF) of 1,300 cfs occurs at the SPF headwater and tailwater stages. Real system operations must account for various factors to determine the appropriate spillway gate opening and discharge rate, including maximum allowable gate opening (MAGO) criteria to keep discharge velocities from exceeding design limits and maximum permissible head (MPH) across the structure. These criteria are not explicitly considered by the daily timestep routing model, but the model does calculate the upper limit of S-59 discharge capability (S59Qcap) using the daily simulated upstream and downstream lake stages, which is capped by the user-input S59maxcap, currently set to 1,300 cfs.

The S-59 discharge capacity (1,300 cfs) also is the 99th percentile value of the historical flow data (1965 to 2005). Maximum flow during the historical period was 2,160 cfs; however, this maximum is not recommended for S59maxcap because it is excessively high and inappropriate as an upper limit for simulating long-term performance. If flood peaks are of interest, more refinement to the model or a finer timestep hydraulic model may be needed.

Details about the daily S-59 hydraulic capacity computation (S59Qcap) are contained within the ETOops and ETOSim worksheets and are described below.

S59Qcap is the structure's hydraulic capacity, which is approximated by the UK-OPS Model as:

$$S59Qcap = K(HWEL - CEL)\sqrt{HWEL - TWEL} \quad (3.2.1)$$

Where:

HWEL = S59Hsim

CEL = 49.1 feet crest elevation

TWEL = S61Hsim

K = 125, derived from the following traditional orifice flow equation:

$$Q = CA\sqrt{2g(HWEL - TWEL)} \quad (3.2.2)$$

Where:

C = empirical discharge coefficient

A = L(HWEL-CEL)

g = gravity of Earth (32.2 ft/s²)

L = gate width

By taking the ratio of Q/Q*, where Q* is the same equation using the SPF information, **Equation 3.2.1** can be derived. **Equation 3.2.1** is used by the UK-OPS Model for daily timestep approximation of the dynamic structure capacity. As described previously, S59Qcap cannot be larger than S59maxcap, which currently is set to the SPF capacity of 1,300 cfs.

3.2.2 Temporary Pump Capacity Assumptions for S-59

For testing scenarios such as ETO stage drawdown operations, which aim to periodically lower the lake stage below the elevation of the downstream TOH, the UK-OPS Model has a feature that allows specification of temporary pumps in parallel with the S-59 gated spillway. The ETOops worksheet allows specification of the average daily pump flow rate (S59pumpcap) and has an option to supplement gravity releases with pumping when the spillway capacity is less than the target release. Simultaneous gravity flow and pumping are simulated, and the user can specify a percent reduction in gravity capacity when pumping is used simultaneously. This accounts for the reduced spillway discharge rate due to the rise in tailwater stage from pumping (**Figure 3-4**). Such a condition can happen when the water level difference across the structure (Δh) is small but positive. Thus, gravity flow capability is possible, but it may be smaller than desired, and pumping is necessary to meet the desired flow target. Such a simultaneous use condition may be short-lived as the headwater elevation recedes below the tailwater elevation and water level difference across the structure becomes negative.

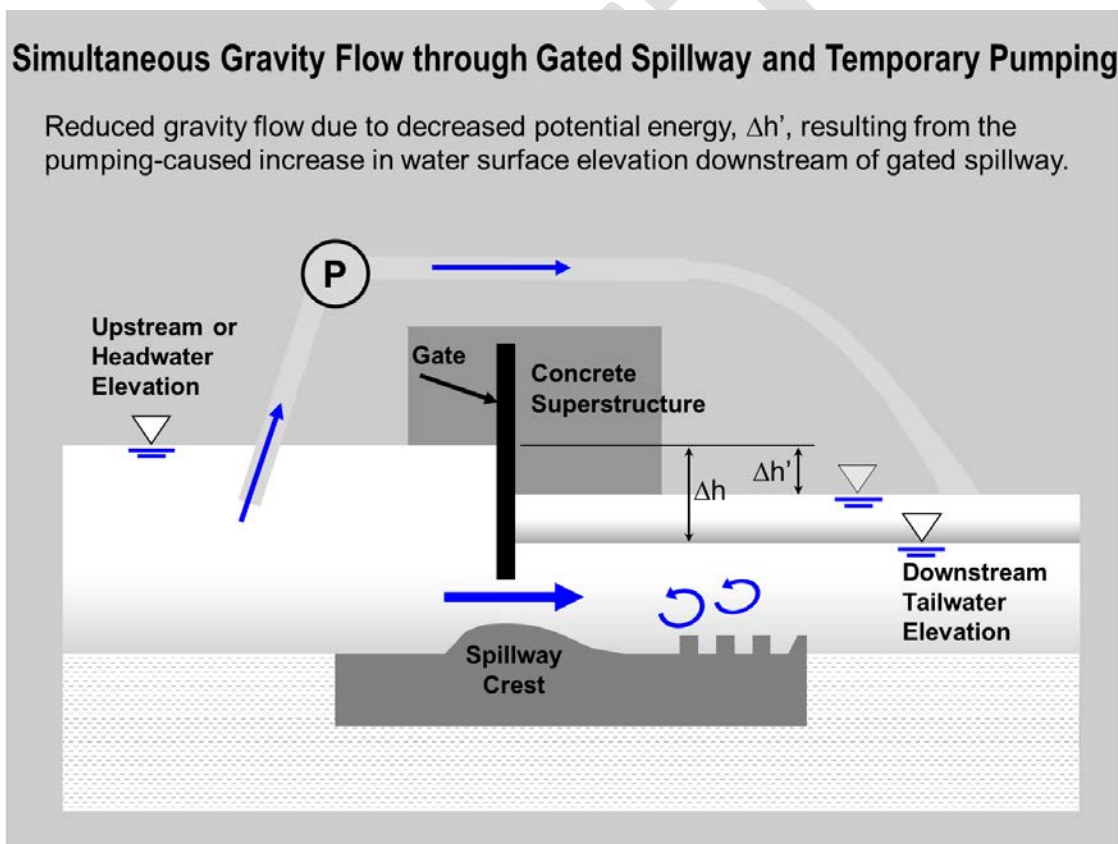


Figure 3-4. Simultaneous gated spillway gravity flow and temporary pumping.

3.2.3 Options for Simulating S-59 Operations

The UK-OPS Model has a few ways to simulate S-59 releases, which allows for testing alternative operations. **Table 3-1** shows the various settings of the parameter QoptETO, which is specified in the ETOops worksheet.

Table 3-1. Optional UK-OPS Model operations for S-59 and East Lake Tohopekaliga.

Parameter	Definition
QoptETO = 0	Flow values set to inputs for testing routing calculations
QoptETO = 1	Releases per operating zones and zone-discharge function
QoptETO = 2	Same as Option 1 but gravity releases are supplemented with pumping when the spillway capacity is less than the target release (Qregadj).
QoptETO = 3	Fixed, unrealistic 200 cubic feet per second release [placeholder for future option and code in routing worksheet (ETOsims)]
QoptETO = 4	Releases per user-specified logic in routing worksheet (ETOsims) Currently set up to determine releases necessary to achieve user-specified stage recession rates within user-specified dates

3.3 Lake Tohopekaliga Regulation Schedule

The TOH regulation schedule (**Figure 3-5**) specifies releases at S-61 depending on lake stage. The TOH regulation schedule rules traditionally have been designed to simply discharge water whenever the lake stage is above the schedule (Zone A). Releases in Zone B can be made for environmental purposes, navigation, and water supply, but are not necessary to manage the lake stage.

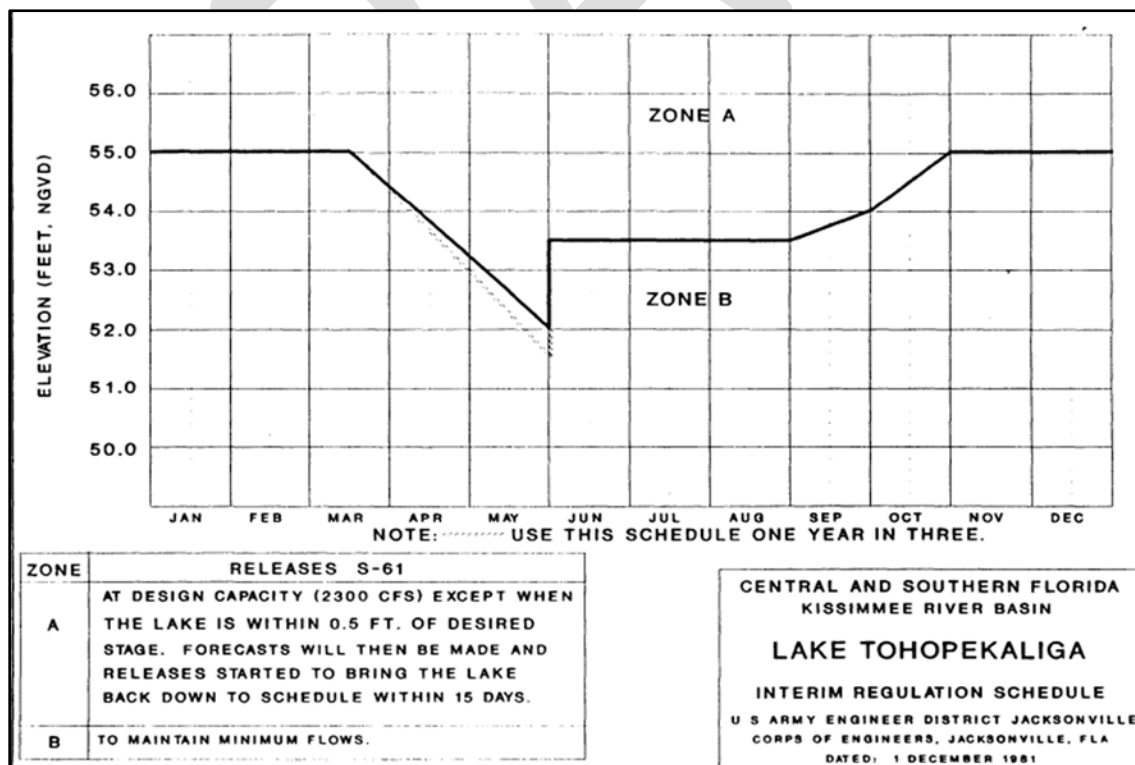


Figure 3-5. Lake Tohopekaliga regulation schedule.

Figure 3-6 illustrates the TOH regulation schedule as seen by the UK-OPS Model. Up to six zones can be defined. The zones are numbered, and the labeled lines represent the bottom of the zone. The green line (Zone 4) represents the drawdown operation used in 2018 and 2019 to benefit in-lake fish and wildlife resources. The drawdowns initiated at an elevation of 54.60 feet NGVD29 on January 15. The dashed line (Zone 6) represents a 0.3-foot offset above the Zone A line (Zone 5) that can be used to transition flows up to the maximum discharge. The model can simulate a linear transition from zero to maximum discharge in this range, if specified.

The UK-OPS Model uses a zone-discharge function to specify discharge rates within the regulation schedule zones. Consistent with the regulation schedule zone labeling, the zone-discharge function places the zone number at the bottom of the zone. For TOH (**Figure 3-7**), the function is relatively simple. Zero discharge for all zones below Zone 4. Within Zone 4 (between the green line and the Zone 5 black line in **Figure 3-6**), discharge linearly increases with stage from 1,150 to 2,300 cfs. Above Zone 5, continue with 2,300 cfs, which is the maximum S-61 capacity assumed by the model. In this case, there is no transition specified for Zone 5. For stages above the Zone 5 line (same as bottom of Zone A), the model simulates the maximum hydraulic capacity of S-61, considering the headwater and tailwater stages approximated by the simulated stages in TOH and KCH, respectively.

UK-OPS Model users can specify the breakpoints of the TOH regulation schedule and the zone-discharge function by changing the values in the color-coded tables within the TOHops worksheet. The regulation schedule and the zone-discharge function graphics automatically display changes to the inputs to enable verification of the intended changes.

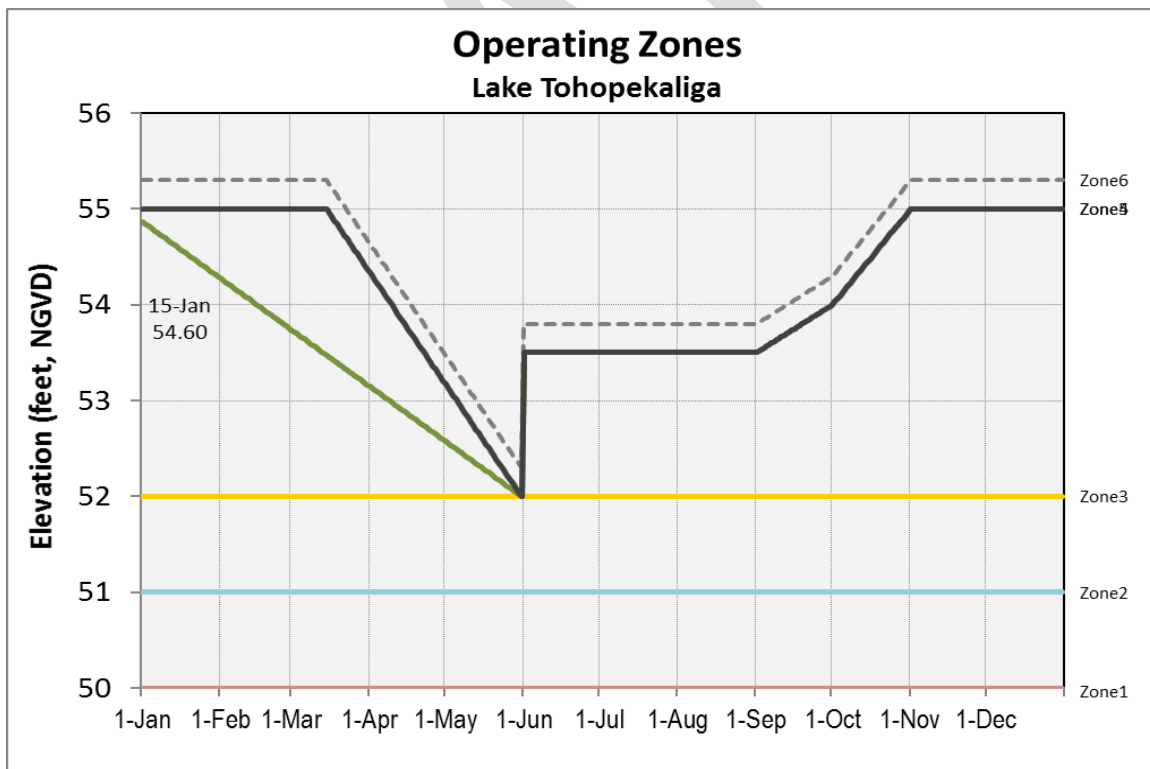


Figure 3-6. TOH regulation schedule as seen by the UK-OPS Model.

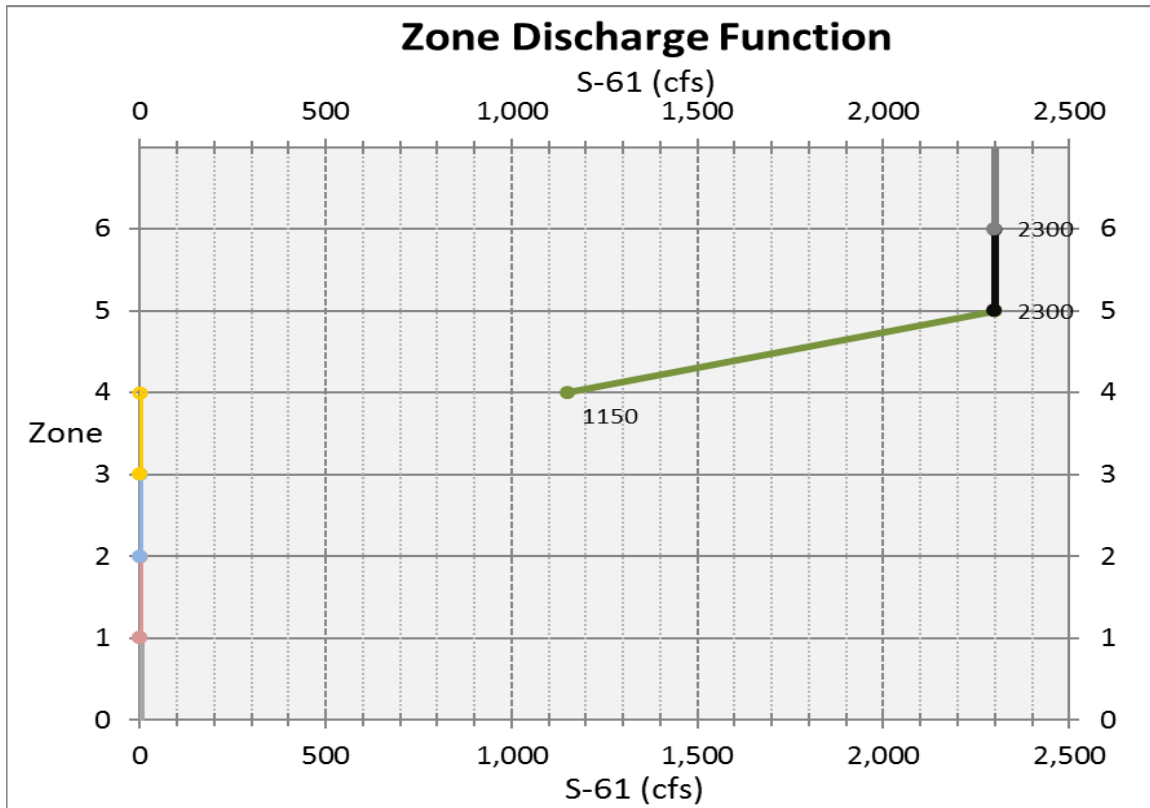


Figure 3-7. TOH zone discharge function used by the UK-OPS Model.

3.3.1 Hydraulic Capacity Assumptions for S-61

The S-61 single-gated spillway has a design capacity of 2,300 cfs at the design headwater and tailwater stages. Real system operations must account for various factors to determine the appropriate spillway gate opening and discharge rate, including maximum allowable gate opening (MAGO) criteria to keep discharge velocities from exceeding design limits and maximum permissible head (MPH) across the structure. These criteria are not explicitly considered by the daily timestep routing model. However, the S-61 capacity (S61Qcap) is computed daily using the simulated upstream and downstream stages and is limited by the user-input S61maxcap, currently set to 2,300 cfs.

The S-61 design discharge (2,300 cfs) also is the 98th percentile value of the historical flow data (1965 to 2005). The 99th percentile was 2,600 cfs. Maximum flow during the historical period was 3,750 cfs; however, this maximum is not recommended for S61maxcap because it is excessively high and inappropriate as an upper limit for simulating long-term performance. If flood peaks are of interest, more refinement to the model or a finer timestep hydraulic model may be needed.

Details about the daily S-61 hydraulic capacity computation (S61Qcap) are contained within the TOHops and TOHsim worksheets and are described below.

3220 S61Qcap is the structure's hydraulic capacity, which is approximated by the UK-OPS Model as:

$$3221 \quad S61Qcap = K(HWEL - CEL)\sqrt{HWEL - TWEL} \quad (3.3.1)$$

3222 Where:

3223 $HWEL = S61Hsim$

3224 $TWEL = S65Hsim$

3225 $CEL = 36.9$ feet crest elevation

3226 $K = 190$, derived from the following traditional orifice flow equation:

$$3227 \quad Q = CA\sqrt{2g(HWEL - TWEL)} \quad (3.3.2)$$

3228 Where:

3229 C = empirical discharge coefficient

3230 $A = L(HWEL - CEL)$

3231 g = gravity of Earth (32.2 ft/s²)

3232 L = gate width

3233 By taking the ratio of Q/Q^* , where Q^* is the same equation using the design information, **Equation 3.3.1**
 3234 can be derived. **Equation 3.3.1** is used by the UK-OPS Model for daily timestep approximation of the
 3235 dynamic structure capacity. As described previously, S61Qcap cannot be larger than S61maxcap, which
 3236 currently is set to the design capacity of 2,300 cfs.

3237 **3.3.2 Temporary Pump Capacity Assumptions for S-61**

3238 For testing scenarios such as TOH stage drawdown operations, which aim to periodically lower the lake
 3239 stage below the elevation of the downstream KCH, the UK-OPS Model has a feature that allows
 3240 specification of temporary pumps in parallel with the S-61 gated spillway. The TOHops worksheet allows
 3241 specification of the average daily pump flow rate (S61pumpcap) and has an option to supplement gravity
 3242 releases with pumping when the spillway capacity is less than the target release. Simultaneous gravity flow
 3243 and pumping are simulated, and the user can specify a percent reduction in gravity capacity when pumping
 3244 is used simultaneously. This accounts for the reduced spillway discharge rate due to the rise in tailwater
 3245 stage from pumping (**Figure 3-4**).

3.3.3 Options for Simulating S-61 Operations

The UK-OPS Model has a few ways to simulate S-61 releases, which allows for testing alternative operations. **Table 3-2** shows the various settings of the parameter QoptTOH, which is specified in the TOHops worksheet.

Table 3-2. Optional UK-OPS Model operations for S-61 and Lake Tohopekaliga.

Parameter	Definition
QoptTOH = 0	Flow values set to inputs for testing routing calculations
QoptTOH = 1	Releases per operating zones and zone-discharge function
QoptTOH = 2	Same as Option 1, but gravity releases are supplemented with pumping when the spillway capacity is less than the target release (Qregadj).
QoptTOH = 3	Fixed, unrealistic 200 cubic feet per second release [placeholder for future option and code in routing worksheet (TOHsim)]
QoptTOH = 4	Releases per user-specified logic in routing worksheet (TOHsim) Currently set up to determine releases necessary to achieve user-specified stage recession rates within user-specified dates

3.4 Lakes Kissimmee, Cypress, and Hatchineha Regulation Schedule

The KCH regulation schedule specifies releases at S-65 depending primarily on lake stage. The KCH regulation schedule rules originally were designed to simply discharge water whenever the lake stage was above the schedule (**Figure 3-8**). However, during construction of the KRRP, an interim regulation schedule (**Figure 3-9**) and subsequent modifications to Zone B operations, were used. Interim operations were intended to be used until the Headwaters Revitalization regulation schedule is implemented upon completion of the KRRP (**Figure 3-10**). (It is important to note that new science and experience gained during the years of KRRP construction have yielded proposed refinements to the Headwaters Revitalization regulation schedule, particularly below Zone A.)

The KCH regulation schedule is more complex than the ETO and TOH schedules. The KCH schedule includes provisions that consider hydrologic conditions in the downstream Kissimmee River. Therefore, the options in the UK-OPS Model for simulating alternative operations of KCH are more complex than for ETO and TOH.

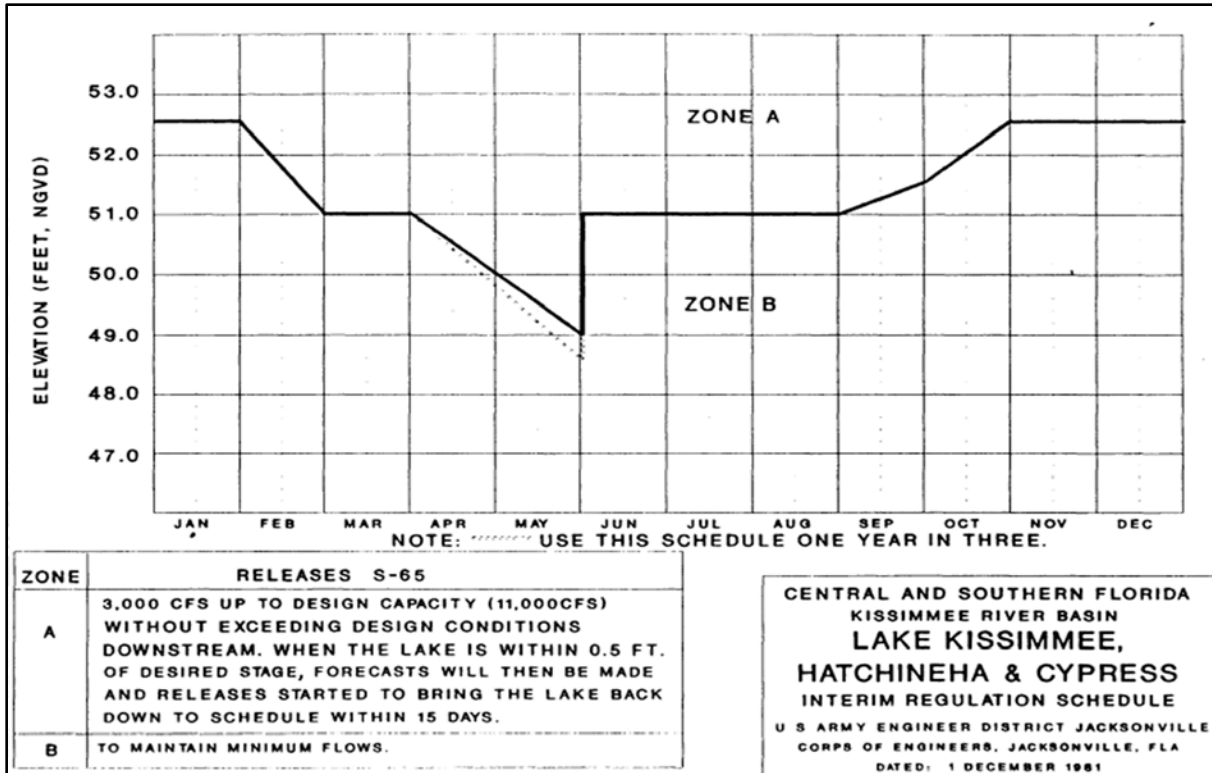


Figure 3-8. Pre-Kissimmee River Restoration Project regulation schedule for Lakes Kissimmee, Cypress, and Hatchineha.

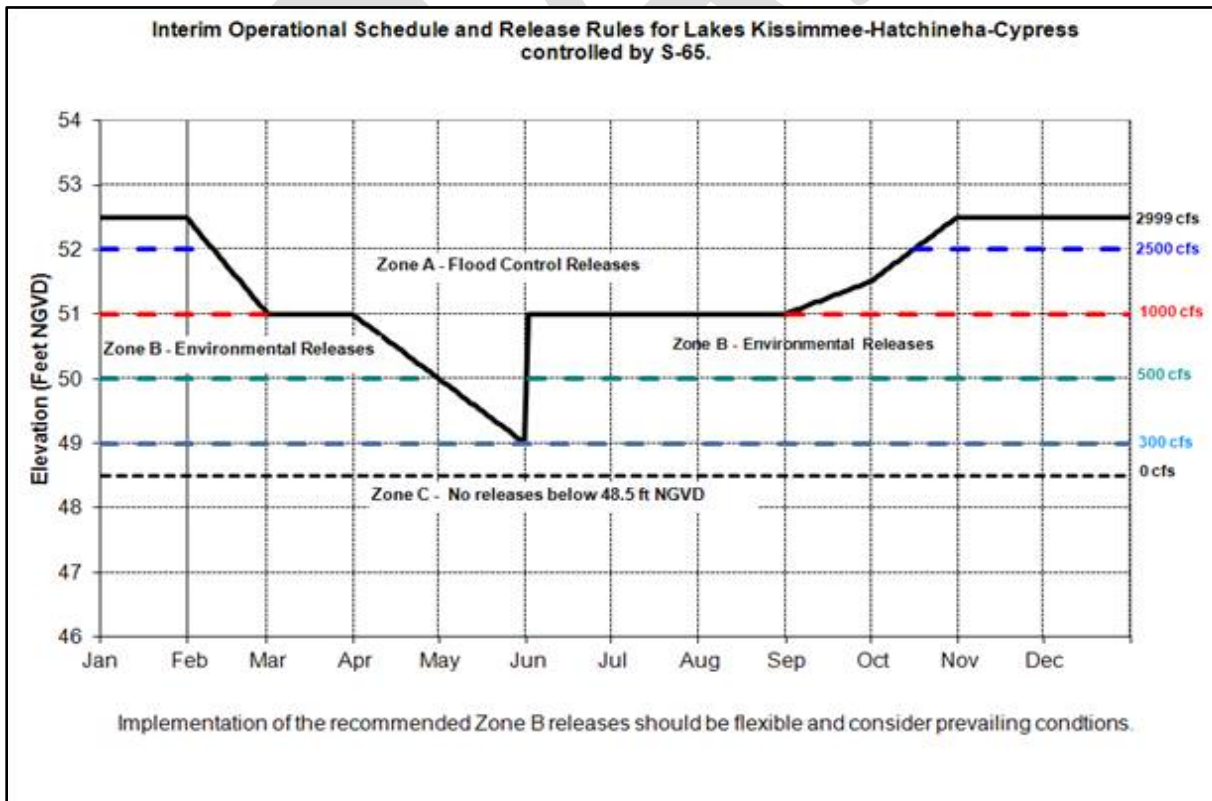


Figure 3-9. Lakes Kissimmee, Cypress, and Hatchineha interim regulation schedule.

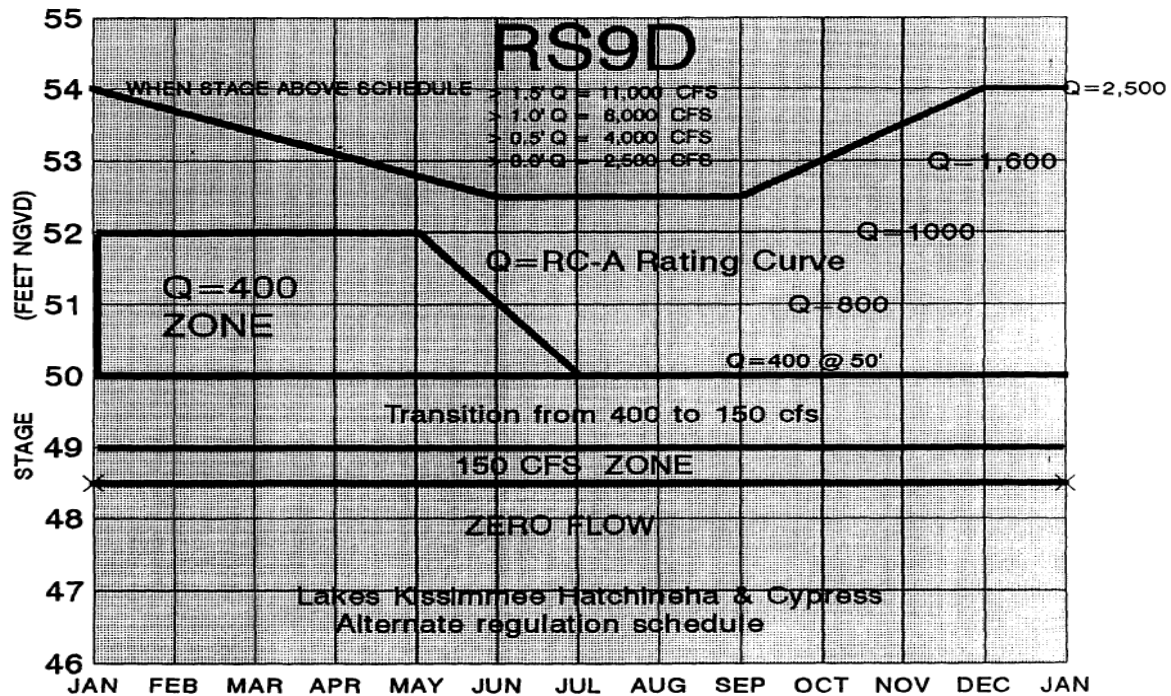


Figure 3-10. Lake Kissimmee, Cypress, and Hatchineha authorized Headwaters Revitalization regulation schedule. Recommended modified regulation schedule for the Kissimmee River Headwaters Revitalization Project (From: United States Army Corps of Engineers 1996).

Figure 3-11 illustrates the KCH regulation schedule as seen by the UK-OPS Model. Up to 10 zones can be defined. The zones are numbered, and the labeled lines represent the bottom of the zone. The various zone lines in **Figure 3-11** represent the operation designed for the 2019 wet season to benefit fish and wildlife resources for KCH and the Kissimmee River. The dashed line (Zone 10) represents a 0.3-foot offset above the Zone A line (Zone 9) that is used to transition flows up to the maximum discharge. The model can simulate a linear transition from zero to maximum discharge in this range, if specified.

The UK-OPS Model uses a zone-discharge function to specify discharge rates within the regulation schedule zones. For KCH (**Figure 3-12**), the function is more complex than for ETO and TOH. As with the other zone-discharge functions, the zone number represents the bottom of the zone. Zero discharge is prescribed for all zones below Zone 3 (elevation 48.5 feet). Within Zone 3, discharge linearly increases with rising stage from 0 to 300 cfs. Zone 4 discharge is to be a constant 300 cfs, Zones 5 to 8 also specify linear variation with stage. Zone 9 transitions the discharge from 3,000 cfs at the top of the schedule (bottom of Zone A) to maximum capacity of 11,000 cfs at the Zone 10 dashed line, which is 0.3 feet above the schedule.

UK-OPS Model users can specify the breakpoints of the KCH regulation schedule and the zone-discharge function by changing the values in the color-coded tables within the KCHops worksheet. The regulation schedule and the zone-discharge function graphics automatically display changes to the inputs to enable verification of the intended changes.

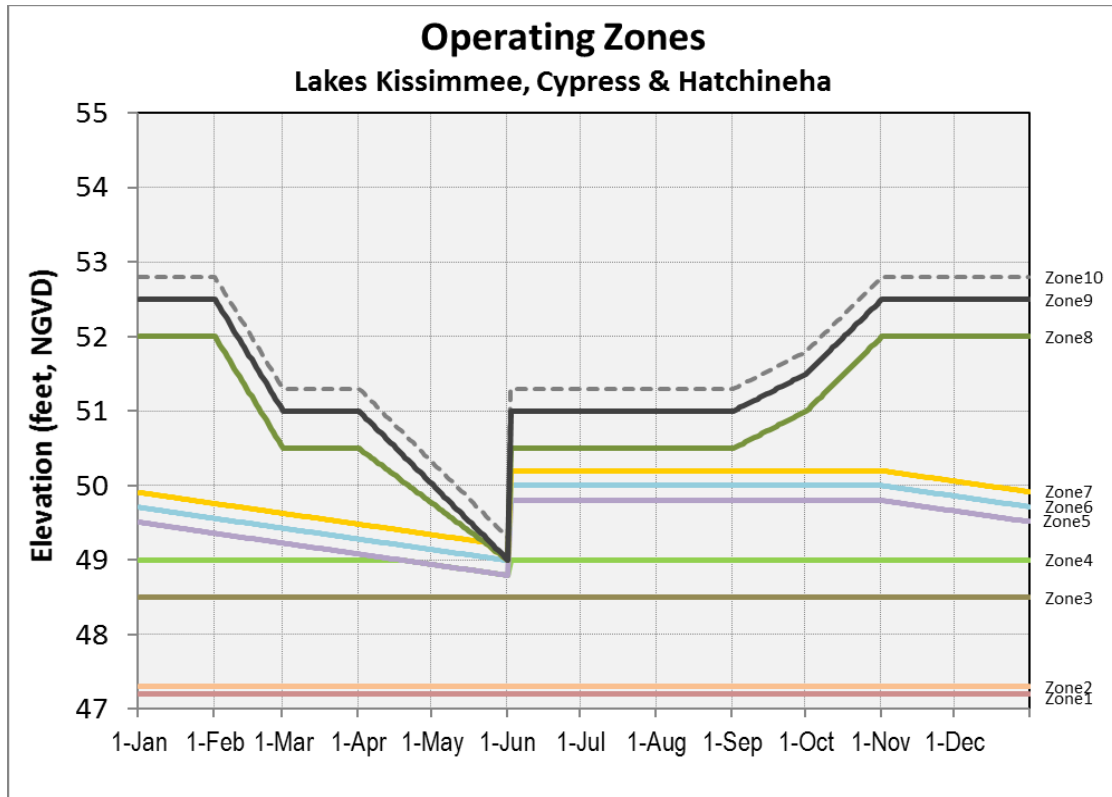


Figure 3-11. Lakes Kissimmee, Cypress, and Hatchineha regulation schedule as seen by the UK-OPS Model.

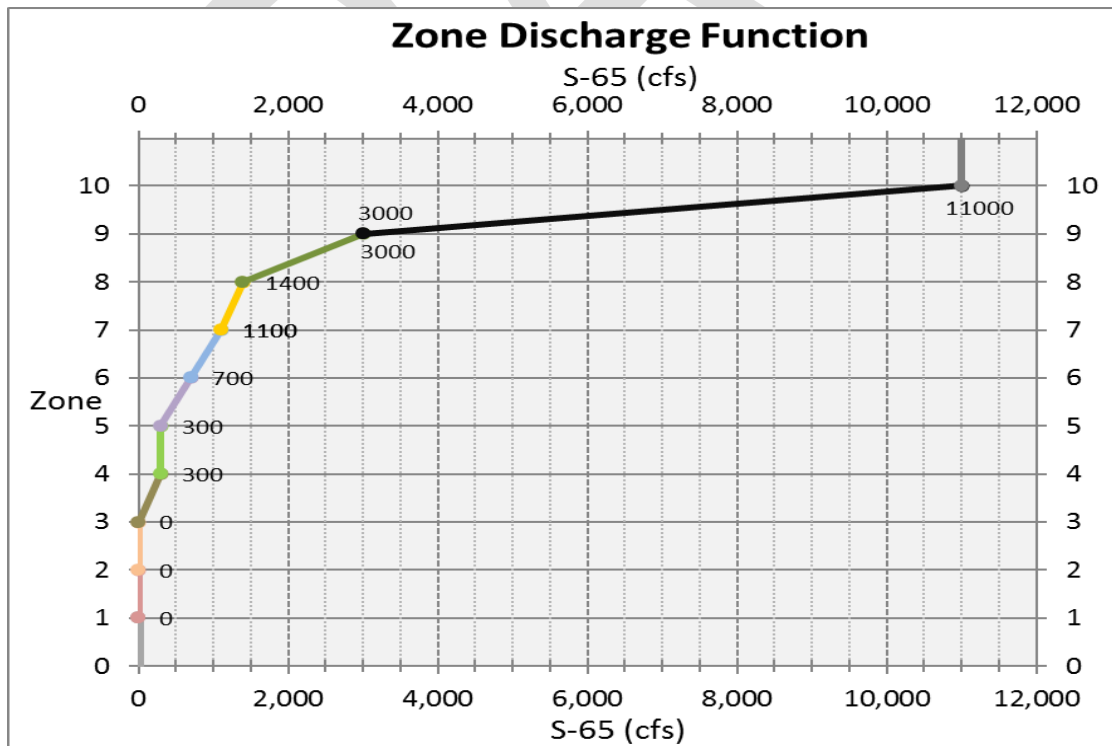


Figure 3-12. Lakes Kissimmee, Cypress, and Hatchineha zone-discharge function used by the UK-OPS Model.

3.4.1 Hydraulic Capacity Assumptions for S-65 and S-65A

The S-65 five-gated spillway is capable of discharging up to 11,000 cfs. The downstream S-65A gated spillway also has a design capacity of 11,000 cfs. However, much of the capacity at S-65A is taken up by basin runoff; therefore, releases at S-65 generally are limited to avoid exceeding S-65A discharge capacity. Additionally, the operating criteria for S-65 provides for a firm capacity of 3,000 cfs. In other words, a minimum of 3,000 cfs must be released at S-65.

The UK-OPS Model uses a time series of basin runoff entering Pool A (the river reach from S-65 to S-65A) to determine the maximum release rates each day of the simulation. The model does not simulate the C-38 Canal stage within Pool A; therefore, even a rudimentary hydraulic discharge calculation, like that used for S-59 and S-61, is not possible. This has not proven to be a limitation of the UK-OPS Model period-of-record simulations because the discharges prescribed by the regulation schedule are almost always less than the 11,000 cfs limit at S-65A. Furthermore, when KCH Zone A releases are required, simulated runoff into the C-38 Canal within Pool A has not been high enough to trigger use of the firm capacity provision. A more detailed hydraulic model like the Mike 11 application for the Kissimmee River (SFWMD 2017) is needed to perform an analysis that involves assessing discharge capacity based on C-38 Canal stage.

4 MODEL STRUCTURE AND ORGANIZATION

4.1 Overview and User Interface

This section presents the structure and organization of the UK-OPS Model Excel® workbook, particularly the various worksheets and general data flow between worksheets. Descriptions of the primary inputs and computational worksheets are provided. The model output worksheets and performance graphics are described in **Section 5**.

Figure 4-1 illustrates the basic model structure and data flow between the worksheets. From the graphical user interface (GUI) worksheet (**Figure 2-3**), the user can specify simulation type, simulation name and description, and one of four output locations (ALT0 to ALT3). Simulations are executed from the GUI worksheet using the Run and Save buttons. The Retrieve button retrieves/loads previous scenario inputs into the worksheets that contain the active operating schedules for each lake system. Then, the inputs can be modified, and a new scenario can be executed. Macros execute the simulation and automatically manage the input and output data.

Clicking on the outlet structure name links on the GUI map transfers control to the corresponding operations worksheet where modifications to the regulation schedules and changes to other operating assumptions can be made (e.g., KCHops). The outlet structure discharge and routing calculations for each lake system are handled in separate worksheets named for each lake system (e.g., KCHsim).

Each lake system has a worksheet for specifying the input operations, and each simulation has a worksheet (ALT0 to ALT3) containing all the outputs as well as a copy of the input parameter values, which can be retrieved from the GUI buttons as noted above. Simulation outputs are automatically accessed by the time-series plots and performance summary graphics. In some cases, the summary graphics have dropdown menus to specify the particular simulation and summary information to display. A single 49-year, daily timestep, simulation executes in less than 4 minutes; thus, results are quickly available for analysis.

4.2 Operations Worksheets for Large Lake Systems

The following discussions focus on the operations-related input data sets used in the UK-OPS Model for the large lake systems. The KCHops, TOHops, and ETOops worksheets contain the operations input for lake systems KCH, TOH, and ETO, respectively. The information and organizational layout are similar among the three worksheets.

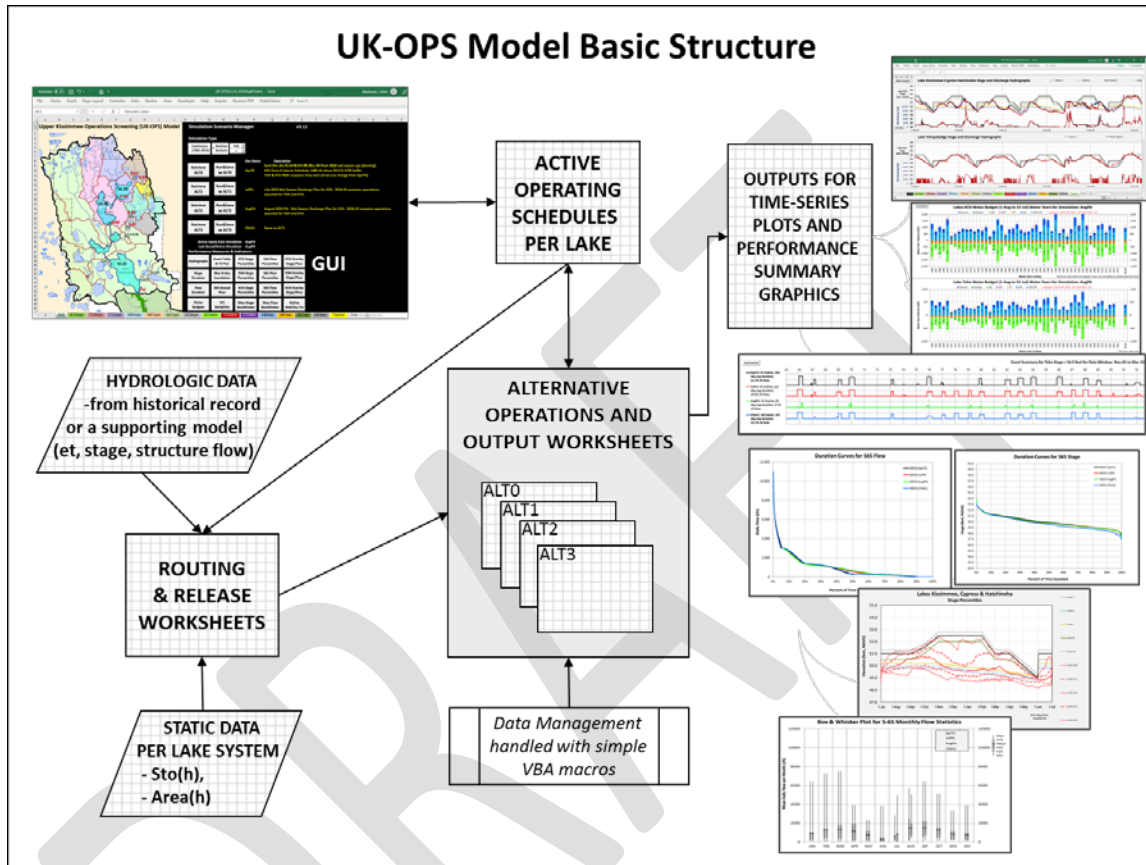


Figure 4-1. UK-OPS Model basic structure and data flow.

4.2.1 KCHops Worksheet

The KCHops worksheet contains operational information for the KCH system simulation. The model user can prescribe how to manage the KCH system by defining its regulation schedule, zone-discharge relationship, and parameters for releasing water to the Kissimmee River. In addition, various switches or flags for available operational features are defined in this worksheet.

The KCHops worksheet also contains copies of breakpoint data for past, present, and future planned KCH regulation schedules. These are located starting in column AP. The active schedule used for the simulation is in the predefined range OpZonesKCH, located in the upper left section of the worksheet in the shaded columns. Users can change the breakpoints as needed to describe the desired schedule. The breakpoints are used to interpolate the daily values of each zone, which are displayed in the Operating Zones chart starting in column N. Similarly, the release rules and limits for describing the zone-discharge function, located under ReleaseRulesKCH, can be modified to reflect desired inputs. The entered breakpoints update the Zone-Discharge Function chart, which represents how the model will view the breakpoint information and serves as a helpful way to ensure the desired input is being used.

The UK-OPS Model has several ways to specify S-65 release rules. These features enable testing alternative operations to improve performance for the river and/or to improve the balance of performance between the river and KCH. The model also allows specification of an alternative regulation schedule to be used for user-specified conditions or for specifically defined years of the simulation. For example, this feature enables testing of periodic lake drawdown operations. Specifications for alternative operations begin in column AA.

Table 4-1 presents the various parameters and options available for testing alternative operations. Further details and tips are provided within the worksheet via mouse-over comments indicated by red triangles in the upper-right corner of pertinent cells.

Table 4-1. Optional UK-OPS Model operations for S-65 and Lakes Kissimmee, Cypress, and Hatchineha.

Parameter	Definition
QoptKCH = 0	Flow values set to inputs for testing routing calculations
QoptKCH = 1	Releases per operating zones and zone-discharge function
QoptKCH = 2	Option 1 with daily change in releases limited by maxDQrise and maxDQfall (Figure 4-2)
QoptKCH = 3	Option 2 but releases shift to zone-discharge function at zone boundaries
QoptKCH = 4	Zone B releases per user-specified flow time series Series number specified via parameter QoptS65tarQseries and points to series in the S65targetQseries worksheet
QoptKCH = 5	Releases per maximum of Options 1 and 4
QoptKCH = 6	Releases per user-specified logic in routing worksheet (KCHsim)
OptKCHalt = 1	Use alternative operations when user-specified stage conditions are met
OptKCHalt = 2	Use alternative operations for user-specified years

For QoptKCH values of 2 or 3 (**Table 4-1**), the release rate limits are specified by values shown in **Figure 4-2**. This figure represents a typical function specified to limit release rates at S-65 or S-65A depending on the previous day's discharge rate. Limits can be specified for increasing and decreasing discharge regimes.

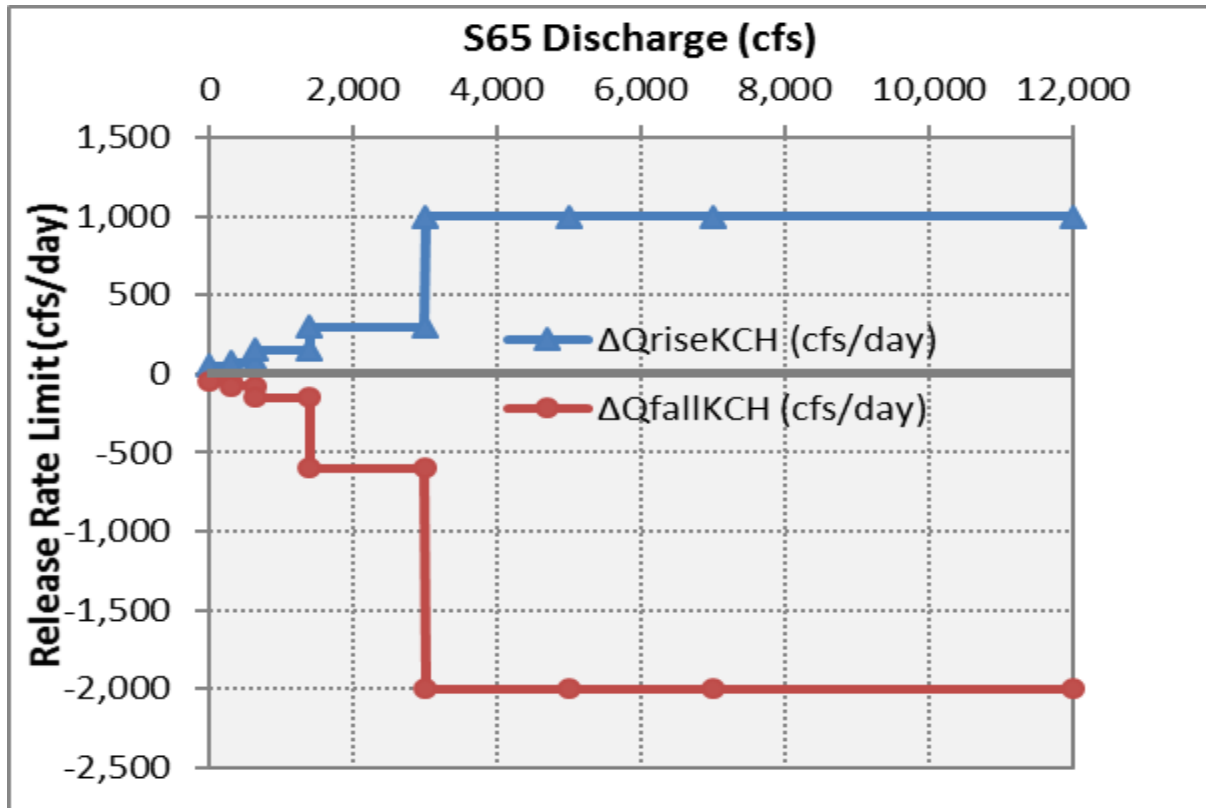


Figure 4-2. Example of S-65 release rate limits for Lakes Kissimmee, Cypress, and Hatchineha.

4.2.2 TOHops Worksheet

The TOHops worksheet contains operational information for the TOH system simulation. The model user can prescribe how to manage TOH by defining its regulation schedule, zone-discharge relationship, and other parameters. In addition, various switches or flags for available operational features are defined in this worksheet.

The TOHops worksheet contains breakpoint data for several alternative regulation schedules that have been tested or actually used for TOH. These are located starting in column AA. The active schedule used for the simulation is in the predefined range OpZonesTOH, located in the upper left section of the worksheet in the shaded columns. Users can change the breakpoints as needed to describe the desired schedule. The breakpoints are used to interpolate the daily values of each zone and are displayed in the Operating Zones chart starting in column J. Similarly, the release rules and limits for describing the zone-discharge function, located in ReleaseRulesTOH, can be modified to reflect desired inputs. The breakpoints entered update the Zone-Discharge Function chart, which represents how the model will view the breakpoint information and serves as a helpful way to ensure the desired input is being used.

Other inputs in the TOHops worksheet include water supply withdrawal parameters, which enable testing user-specified withdrawals subject to the draft KRCOL Water Reservation rules. Switches are available that require up to three conditions to be satisfied before the simulated withdrawal is made.

Table 4-2 presents the various parameters and options available for testing alternative operations. Further details and tips are provided within the worksheet via mouse-over comments indicated by red triangles in the upper-right corner of pertinent cells.

Table 4-2. Optional UK-OPS Model operations for S-61 and Lake Tohopekaliga.

Parameter	Definition
QoptTOH = 0	Flow values set to inputs for testing routing calculations
QoptTOH = 1	Releases per operating zones and zone-discharge function
QoptTOH = 2	Same as Option 1, but gravity releases are supplemented with pumping when the spillway capacity is less than the target release
QoptTOH = 3	Constant 200 cubic feet per second release (placeholder for future option and code)
QoptTOH = 4	Releases per user-specified logic in routing worksheet (TOHsim)

4.2.3 ETOops Worksheet

The ETOops worksheet contains operational information for the ETO system simulation. The model user can prescribe how to manage ETO by defining its regulation schedule, zone-discharge relationship, and other parameters. In addition, various switches or flags for available operational features are defined in this worksheet.

The ETOops worksheet contains breakpoint data for several alternative regulation schedules that have been tested or actually used for ETO. These are located starting in column AA. The active schedule used for the simulation is in the predefined range OpZonesETO, located in the upper left section of the worksheet in the shaded columns. Users can change the breakpoints as needed to describe the desired schedule. The breakpoints are used to interpolate the daily values of each zone and are displayed in the Operating Zones chart starting in column J. Similarly, the release rules and limits for describing the zone-discharge function, located in ReleaseRulesETO, can be modified to reflect desired inputs. The entered breakpoints update the Zone-Discharge Function chart, which represents how the model will view the breakpoint information and serves as a helpful way to ensure the desired input is being used.

Other inputs in the ETOops worksheet include water supply withdrawal parameters, which enable testing user-specified withdrawals subject to the draft KRCOL Water Reservation rules. Switches are available that require up to three conditions to be satisfied before the simulated withdrawal is made.

Table 4-3 presents the various parameters and options available for testing alternative operations. Further details and tips are provided within the worksheet via mouse-over comments indicated by red triangles in the upper-right corner of pertinent cells.

Table 4-3. Optional UK-OPS Model operations for S-59 and East Lake Tohopekaliga.

Parameter	Definition
QoptETO = 0	Flow values set to inputs for testing routing calculations
QoptETO = 1	Releases per operating zones and zone-discharge function
QoptETO = 2	Same as Option 1, but gravity releases are supplemented with pumping when the spillway capacity is less than the target release
QoptETO = 3	Constant 200 cubic feet per second release (placeholder for future option and code)
QoptETO = 4	Releases per user-specified logic in routing worksheet (ETOsimsim)

4.3 Operations Worksheets for Small Lake Systems

This section describes the operations-related input data sets used in the UK-OPS Model for the small lake systems. The HMJops, MPJops, ALCops, and GENops worksheets contain the operations input for lake systems HMJ, MPJ, ALC, and GEN, respectively. The information and organizational layout are similar among the four worksheets. There is no routing of inflows and outflows through the small lake systems in the current configuration of the UK-OPS Model. Boundary inflows are defined in the WNI calculation, as described in **Sections 2.2 to 2.5**. The small lakes are included only to test water supply withdrawal scenarios subject to the draft KRCOL Water Reservation rules. As described in **Section 2.5**, withdrawals from the small lakes are simulated as withdrawals from the next downstream large lake system.

4.3.1 HMJops Worksheet

The HMJops worksheet contains operational information for simulating the HMJ system. The modeled operational information is limited to specification of the WRL. Various switches or flags for available KRCOL Water Reservation criteria also are defined in this worksheet.

The HMJ regulation schedule is in the predefined range OpZonesHMJ, located in the upper left section of the worksheet in the shaded columns. Users can change the breakpoints of the schedule, but it has no bearing on the simulation; only changes to the WRL can affect the simulation. The WRL, along with other draft KRCOL Water Reservation rule criteria, determine when water supply withdrawals can occur.

The UK-OPS Model has five optional conditions in the HMJops worksheet that can be evaluated to determine if water supply withdrawals can occur:

1. HMJ stage above its WRL?
2. ETO stage above its WRL?
3. TOH stage above its WRL?
4. KCH stage above its WRL?
5. Lake Okeechobee discharging excess water to tide?

Typically, conditions 1 and 2 or conditions 1, 2, and 5 are set to TRUE to determine when the prescribed HMJ withdrawal capacity can be taken. Withdrawals can occur if the HMJ and ETO stages are above their respective WRLs and the other draft KRCOL Water Reservation rule criteria are met. Recognizing the withdrawal may reduce lake outflow and affect the downstream large lake system, the UK-OPS Model assumes the withdrawal is directly from the downstream large lake system, ETO in this instance.

4.3.2 MPJops Worksheet

The MPJops worksheet contains operational information for simulating the MPJ system. The modeled operational information is limited to specification of the WRL. Various switches or flags for available KRCOL Water Reservation criteria also are defined in this worksheet.

The MPJ regulation schedule is in the predefined range OpZonesMPJ, located in the upper left section of the worksheet in the shaded columns. Users can change the breakpoints of the schedule, but it has no bearing on the simulation; only changes to the WRL can affect the simulation. The WRL, along with other proposed KRCOL Water Reservation criteria, determines when water supply withdrawals can occur.

3458 The UK-OPS Model has six optional conditions in the MPJops worksheet that can be evaluated to determine
3459 if water supply withdrawals can occur:

- 3460 1. MPJ stage above its WRL?
- 3461 2. HMJ stage above its WRL?
- 3462 3. ETO stage above its WRL?
- 3463 4. TOH stage above its WRL?
- 3464 5. KCH stage above its WRL?
- 3465 6. Lake Okeechobee discharging excess water to tide?

3466 Typically, conditions 1, 2, and 3 or conditions 1, 2, 3, and 5 are set to TRUE to determine when the
3467 prescribed MPJ withdrawal capacity can be taken. Withdrawals can occur if the MPJ, HMJ, and ETO stages
3468 are above their respective WRLs and the other draft KRCOL Water Reservation rule criteria are met.
3469 Recognizing the withdrawal may reduce lake outflow and affect the downstream large lake system, the
3470 UK-OPS Model assumes the withdrawal is directly from the downstream large lake system, ETO in this
3471 instance.

3472 **4.3.3 ALCops Worksheet**

3473 The ALCops worksheet contains operational information for simulating the ALC system. The modeled
3474 operational information is limited to specification of the WRL. Various switches or flags for available
3475 KRCOL Water Reservation criteria also are defined in this worksheet.

3476 The ALC regulation schedule is in the predefined range OpZonesALC, located in the upper left section of
3477 the worksheet in the shaded columns. Users can change the breakpoints of the schedule, but it has no bearing
3478 on the simulation; only changes to the WRL can affect the simulation. The WRL, along with other draft
3479 KRCOL Water Reservation criteria, determines when water supply withdrawals can occur.

3480 The UK-OPS Model has four optional conditions in the ALCops worksheet that can be evaluated to
3481 determine if water supply withdrawals can occur:

- 3482 1. ALC stage above its WRL?
- 3483 2. GEN stage above its WRL?
- 3484 3. KCH stage above its WRL?
- 3485 4. Lake Okeechobee discharging excess water to tide?

3486 Typically, conditions 1, 2, and 3 or all four conditions are set to TRUE to determine when the prescribed
3487 ALC withdrawal capacity can be taken. Withdrawals can occur if the ALC, GEN, and KCH stages are
3488 above their respective WRLs and the other draft KRCOL Water Reservation rule criteria are met.
3489 Recognizing the withdrawal may reduce lake outflow and affect the downstream large lake system, the
3490 UK-OPS Model assumes the withdrawal is directly from the downstream large lake system, KCH in this
3491 instance.

3492 **4.3.4 GENops Worksheet**

3493 The GENops worksheet contains operational information for simulating the GEN system. The modeled
3494 operational information is limited to specification of the WRL. Various switches or flags for available
3495 KRCOL Water Reservation criteria also are defined in this worksheet.

3496 The GEN regulation schedule is in the predefined range OpZonesGEN, located in the upper left section of
3497 the worksheet in the shaded columns. Users can change the breakpoints of the schedule, but it has no bearing

3498 on the simulation; only changes to the WRL can affect the simulation. The WRL, along with other draft
3499 KRCOL Water Reservation criteria, determines when water supply withdrawals can occur.

3500 The UK-OPS Model has three optional conditions in the GENops worksheet that can be evaluated to
3501 determine if water supply withdrawals can occur:

- 3502 1. GEN stage above its WRL?
- 3503 2. KCH stage above its WRL?
- 3504 3. Lake Okeechobee discharging excess water to tide?

3505 Typically, conditions 1 and 2 or all three conditions are set to TRUE to determine when the prescribed GEN
3506 withdrawal capacity can be taken. Withdrawals can occur if the GEN and KCH stages are above their
3507 respective WRLs and the other draft KRCOL Water Reservation rule criteria are met. Recognizing the
3508 withdrawal may reduce lake outflow and affect the downstream large lake system, the UK-OPS Model
3509 assumes the withdrawal is directly from the downstream large lake system, KCH in this instance.

3510 **4.4 Routing Worksheets for Large Lake Systems**

3511 This section describes the routing worksheets for the three large lake systems simulated by the UK-OPS
3512 Model. Most simulation calculations occur in the routing sheets using traditional Microsoft Excel®
3513 formulas. Routing calculations are not handled by Visual Basic for Applications (VBA) program code via
3514 Microsoft Excel® macros. Macros are used by the model but primarily to manage the data. The ETOSim,
3515 TOHsim, and KCHsim worksheets contain calculations for determining releases and stages for lake systems
3516 ETO, TOH, and KCH, respectively. The information and organizational layout are similar among the three
3517 routing worksheets. To best understand the worksheets, readers should have the UK-OPS Model workbook
3518 open to follow along with the descriptions.

3519 **4.4.1 ETOSim Worksheet**

3520 The ETOSim worksheet performs the primary simulation for the ETO system. The worksheet contains:
3521 1) the daily timestep computations for processing boundary conditions, namely WNI+RF; 2) calculations
3522 of lake outflows and stages using user-prescribed operating rules; and 3) processing of several metrics of
3523 performance, which are used to automatically update the output performance measures and charts (refer to
3524 **Section 5**).

3525 4.4.1.1 Boundary Conditions

3526 Calculations for computing the WNI+RF boundary series are contained in columns B through K of the
3527 ETOSim worksheet. **Equation 2.2.2** was derived for WNI+RF (**Section 2.2**) and is computed in column K.
3528 Because WNI+RF is a persistent time series, it only needs to be calculated once. The shaded cells in the
3529 worksheet have formulas, whereas the unshaded cells (starting in row 18) contain only values. If input
3530 hydrology data values change, then the ETO_ResetInputData macro (button near cell E4) must be executed
3531 to recalculate the WNI+RF values.

3532 4.4.1.2 Routing

3533 Simulation calculations for ETO stages and S-59 discharges begin in column L of the ETOSim worksheet.
3534 The fundamental routing equation (**Equation 2.2.1**) used was presented in **Section 2.2**. The calculation
3535 uses the beginning-of-day stage, storage, and area for calculating ET volume (column T) and structure
3536 discharge (column AK). Water supply withdrawals, if any, are totaled in column AT. Storage change,

end-of-day storage, and stage are computed in columns AU through AX. The end-of-day values become the beginning-of-day values for the next day. Calculations proceed for each day of the simulation.

When the simulation is executed, the ETO_Expand_Formulas macro expands the routing formulas starting January 7, 1965 (row 17) for all the simulation days. Then the execution runs the ETO_Formulas2Values macro to save the computed formulas as values for further processing. This procedure saves workbook space and computational resources. Buttons at the top of column T are available to execute the macros (e.g., if needed for testing), independent of the simulation execution.

4.4.1.3 Summary Statistics

After routing is completed, the UK-OPS Model processes the simulation output in many different forms. Daily stage and flow tables are automatically updated via the RunSaveETOSTgStats and RunSaveS59FlowStats macros, respectively. The stage tables are within worksheet range BD7 through DK393, and the flow tables are within worksheet range BD407 through BK793. Water budget calculations are within workbook range DO8 through EF62. Water supply reliability calculations are within workbook range EI8 through EY17907.

4.4.2 TOHsim Worksheet

The TOHsim worksheet performs the primary simulation for the TOH system. The worksheet contains: 1) the daily timestep computations for processing boundary conditions, namely WNI+RF; 2) calculations of lake outflows and stages using user-prescribed operating rules; and 3) processing of several metrics of performance, which are used to automatically update the output performance measures and charts (refer to **Section 5**).

4.4.2.1 Boundary Conditions

Calculations for computing the WNI+RF boundary series are contained in columns B through K of the TOHsim worksheet. **Equation 2.3.2** was derived for WNI+RF (**Section 2.3**) and is computed in column K. Because WNI+RF is a persistent time series, it only needs to be calculated once. The shaded cells in the worksheet have formulas, whereas the unshaded cells (starting in row 18) contain only values. If input hydrology data values change, then the TOH_ResetInputData macro (button near cell E4) must be executed to recalculate the WNI+RF values.

4.4.2.2 Routing

Simulation calculations for TOH stages and S-61 discharges begin in column L of the TOHsim worksheet. The fundamental routing equation (**Equation 2.3.1**) was presented in **Section 2.3**. The calculation uses the beginning-of-day stage, storage, and area for calculating ET volume (column T) and structure discharge (column AK). Water supply withdrawals, if any, are evaluated in column AP. Storage change, end-of-day storage, and stage are computed in columns AQ through AT. The end-of-day values become the beginning-of-day values for the next day. Calculations proceed for each day of the simulation.

When the simulation is executed, the TOH_Expand_Formulas macro expands the routing formulas starting January 7, 1965 (row 17) for all the simulation days. Then the execution runs the TOH_Formulas2Values macro to save the computed formulas as values for further processing. This procedure saves workbook space and computational resources. Buttons located at the top of column T are available to execute the macros (e.g., if needed for testing), independent of the simulation execution.

4.4.2.3 Summary Statistics

After routing is completed, the UK-OPS Model processes the simulation output in many different forms. Daily stage and flow tables are automatically updated via the RunSaveTOHStgStats and RunSaveS61FlowStats macros, respectively. The stage tables are within worksheet range BD7 through DK393, and the flow tables are within worksheet range BD407 through BK793. Water budget calculations are within workbook range DO8 through EF62. Water supply reliability calculations are within workbook range EI8 through EY17907.

4.4.3 KCHsim Worksheet

The KCHsim worksheet performs the primary simulation for the KCH system. The worksheet contains: 1) the daily timestep computations for processing boundary conditions, namely WNI+RF; 2) calculations of lake outflows and stages using user-prescribed operating rules; and 3) processing of several metrics of performance, which are used to automatically update the output performance measures and charts (refer to **Section 5**).

4.4.3.1 Boundary Conditions

Calculations for computing the WNI+RF boundary series are contained in columns B through K of the KCHsim worksheet. **Equation 2.4.2** was derived for WNI+RF (**Section 2.4**) and is computed in column K. Because WNI+RF is a persistent time series, it only needs to be calculated once. The shaded cells in the worksheet have formulas, whereas the unshaded cells (starting in row 18) contain only values. If input hydrology data values change, then the KCH_ResetInputData macro (button near cell E4) must be executed to recalculate the WNI+RF values.

4.4.3.2 Routing

Simulation calculations for KCH stages as well as S-65 and S-65A discharges begin in column M of the KCHsim worksheet. The fundamental routing equation (**Equation 2.4.1**) was presented in **Section 2.4**. The calculation uses the beginning-of-day stage, storage, and area for calculating ET volume (column T) and structure discharge (columns AU and AV). Water supply withdrawals, if any, are totaled in column AY. Storage change, end-of-day storage, and stage are computed in columns AZ through BC. The end-of-day values become the beginning-of-day values for the next day. Calculations proceed for each day of the simulation.

When the simulation is executed, the KCH_Expand_Formulas macro expands the routing formulas starting January 7, 1965 (row 17) for all the simulation days. Then the execution runs the KCH_Formulas2Values macro to save the computed formulas as values for further processing. This procedure saves workbook space and computational resources. Buttons located at the top of column T are available to execute the macros (e.g., if needed for testing), independent of the simulation execution.

4.4.3.3 Summary Statistics

After routing is completed, the UK-OPS Model processes the simulation output in many different forms. Daily stage tables are automatically updated via the RunSaveKCHStgStats macro, and daily flow tables for S-65 and S-65A are automatically updated via the RunSaveS65FlowStats and RunSaveS65AFlowStats macros, respectively. The stage tables are within worksheet range BG7 through DN393, and the flow tables for S-65 and S-65A are within worksheet ranges BG407 through DN793 and BG807 through DN1193, respectively. Water budget calculations are within workbook range DR8 through EI62. There are no water supply reliability calculations in the UK-OPS Model for the KCH system because the draft KRCOL Water Reservation rules do not permit withdrawals from this lake system.

4.5 Water Supply Worksheets for Small Lake Systems

This section describes the water supply worksheets for the four small lake systems simulated by the UK-OPS Model. As previously mentioned, routing currently is not simulated for the small lake systems in the UK-OPS Model. The small lake systems are used only to determine the timing and volume of potential water supply withdrawals subject to the proposed KRCOL Water Reservation rule constraints. The HMJws, MPJws, ALCws, and GENws worksheets contain calculations for simulating water supply withdrawals from lake systems HMJ, MPJ, ALC, and GEN, respectively. The information and organizational layout are similar among the four worksheets. To best understand the worksheets, readers should have the UK-OPS Model workbook open to follow along with the descriptions.

4.5.1 HMJws Worksheet

The HMJws worksheet determines if user-prescribed water supply withdrawals can be made from the HMJ lake system. The worksheet is much simpler and smaller than the routing worksheets for the large lake systems. The HMJws worksheet: 1) contains the daily timestep computations that compare the HMJ input stages and stages in the downstream lakes with their respective WRLs; and 2) processes the number of days per month that water supply withdrawals were simulated.

Withdrawals allowed from the HMJ system are simulated as withdrawals from the next downstream large lake system, ETO in this instance. The assumption is that withdrawals from HMJ would reduce inflows to ETO, thus the model makes the withdrawal, subject to constraints, from ETO.

To save computation resources, this worksheet expands the formulas for the simulation period to make the necessary computations, then saves the formulas as values. The HMJ_Expand_Formulas and HMJ_Formulas2Values macros are executed automatically during a simulation. Buttons in column R can run the macros independent of the simulation for testing.

4.5.2 MPJws Worksheet

The MPJws worksheet determines if user-prescribed water supply withdrawals can be made from the MPJ lake system. The worksheet is much simpler and smaller than the routing worksheets for the large lake systems. The MPJws worksheet: 1) contains the daily timestep computations that compare the MPJ input stages and stages in the downstream lakes with their respective WRLs; and 2) processes the number of days per month that water supply withdrawals were simulated.

Withdrawals allowed from the MPJ system are simulated as withdrawals from the next downstream large lake system, ETO in this instance. The assumption is that withdrawals from MPJ would reduce inflows to ETO, thus the model makes the withdrawal, subject to constraints, from ETO.

To save computation resources, this worksheet expands the formulas for the simulation period to make the necessary computations, then saves the formulas as values. The MPJ_Expand_Formulas and MPJ_Formulas2Values macros are executed automatically during a simulation. Buttons in column R can run the macros independent of the simulation for testing.

4.5.3 ALCws Worksheet

The ALCws worksheet determines if user-prescribed water supply withdrawals can be made from the ALC lake system. The worksheet is much simpler and smaller than the routing worksheets for the large lake systems. The ALCws worksheet: 1) contains the daily timestep computations that compare the ALC input stages and stages in the downstream lakes with their respective WRLs; and 2) processes the number of days per month that water supply withdrawals were simulated.

3659 Withdrawals allowed from the ALC system are simulated as withdrawals from the next downstream large
 3660 lake system, KCH in this instance. The assumption is that withdrawals from ALC would reduce inflows to
 3661 KCH, thus the model makes the withdrawal, subject to constraints, from KCH.

3662 To save computation resources, this worksheet expands the formulas for the simulation period to make the
 3663 necessary computations, then saves the formulas as values. The ALC_Expand_Formulas and
 3664 ALC_Formulas2Values macros are executed automatically during a simulation. Buttons in column R can
 3665 run the macros independent of the simulation for testing.

3666 **4.5.4 GENws Worksheet**

3667 The GENws worksheet determines if user-prescribed water supply withdrawals can be made from the GEN
 3668 lake system. The worksheet is much simpler and smaller than the routing worksheets for the large lake
 3669 systems. The GENws worksheet: 1) contains the daily timestep computations that compare the GEN input
 3670 stages and stages in the downstream lakes with their respective WRLs; and 2) processes the number of days
 3671 per month that water supply withdrawals were simulated.

3672 Withdrawals allowed from the GEN system are simulated as withdrawals from the next downstream large
 3673 lake system, KCH in this instance. The assumption is that withdrawals from GEN would reduce inflows to
 3674 KCH, thus the model makes the withdrawal, subject to constraints, from KCH.

3675 To save computation resources, this worksheet expands the formulas for the simulation period to make the
 3676 necessary computations, then saves the formulas as values. The GEN_Expand_Formulas and
 3677 GEN_Formulas2Values macros are executed automatically during a simulation. Buttons in column R can
 3678 run the macros independent of the simulation for testing.

3679 **4.6 Other Input Worksheets**

3680 The remaining input worksheets for the UK-OPS Model are described in this section. The following input
 3681 worksheets contain the various time-series input data generated by the more detailed hydrologic models:
 3682 DATAforUKOPS, UKISSforUKOPS, and AFETforUKOPS. As mentioned in **Section 1**, the UK-OPS
 3683 Model does not simulate the rainfall-runoff hydrologic process. Instead, it computes watershed inflows to
 3684 each lake using key hydrologic information from detailed hydrologic models or the historical record.

3685 Other UK-OPS Model input worksheets include S65TargetQseries, which provides flow targets for optional
 3686 use with KCH operations, and StageStoArea, which contains the static data representing the geometric, or
 3687 stage-area and stage-storage, relationships used for the routing computations.

3688 **4.6.1 DATAforUKOPS Worksheet**

3689 The DATAforUKOPS worksheet contains historical lake stage and structure flow data for optional use in
 3690 computing the boundary condition inflows (WNI+RF), as defined in **Section 2** and calculated in the routing
 3691 worksheets (**Section 4.4**).

3692 The DATAforUKOPS worksheet is a product of two separate Microsoft Excel® workbooks used to
 3693 assemble various stage and discharge data sets and to estimate missing values:
 3694 DataPrepForUKOPSmodel.xlsx and StructureQHWTW_DBHydro_AFET-LT(CN18Aug2015).xlsx.
 3695 Using the historical data in this worksheet as the basis for the boundary conditions has the advantage of not
 3696 relying on a particular model for the rainfall-runoff simulation. To evaluate the effects of proposed water
 3697 withdrawals on the draft KRCOL Water Reservation rules, historical data for a specific 41-year period
 3698 (1965 to 2005) are specified. This establishes a fixed data set and period that will not change over time.

4.6.2 UKISSforUKOPS Worksheet

The UKISSforUKOPS worksheet contains simulated lake stage and structure flow data for optional use in computing the boundary condition inflows (WNI+RF), as defined in **Section 2** and calculated in the routing worksheets (**Section 4.4**). The UKISSforUKOPS worksheet contains the output from the Upper Kissimmee Chain of Lakes Routing Model (UKISS) (Fan 1986). Specific UKISS output files are referenced in the worksheet. Using these data to compute the boundary conditions implicitly uses the rainfall-runoff methods and other assumptions of UKISS. UKISS was the only regional hydrologic and water management model for the basin in the 1980s and 1990s. Several models have been developed in the past 20 years that have replaced UKISS, the most recent being the Regional Simulation Model – Basins Model (VanZee 2011).

4.6.3 AFETforUKOPS Worksheet

The AFETforUKOPS worksheet contains simulated lake stage and structure flow data for optional use in computing the boundary condition inflows (WNI+RF), as defined in **Section 2** and calculated in the routing worksheets (**Section 4.4**). The AFETforUKOPS worksheet contains output from the Alternative Formulation and Evaluation Tool (AFET), an application of the Mike 11/Mike SHE Model to the Kissimmee Basin (SFWMD 2009, 2017). Specific AFET output files are referenced in the worksheet. Using these data to compute the boundary conditions implicitly uses the rainfall-runoff methods and other assumptions of AFET and Mike 11/Mike SHE. AFET was developed by the SFWMD with assistance from the Architectural and Engineering Company (AECOM) and the Danish Hydraulic Institute (DHI) in support of the Kissimmee Basin Modeling and Operations Study (KB MOS), which ended prematurely in 2013. The modeling tools were further refined by the SFWMD in 2016 to 2018.

4.6.4 S65TargetQSeries Worksheet

The UK-OPS Model has an option to use a target flow time series at S-65 or S-65A for environmental flows to the Kissimmee River. This concept is similar to the Everglades' Shark River Slough Rainfall Plan and the Tamiami Trail Flow Formula for delivering target environmental flows. Up to 11 series can be input in the S65TargetQSeries worksheet. Currently, this worksheet contains only one input series, RDTsv5r, which mimics the pre-channelization rainfall-runoff response of the UKB. Development of this series is a separate topic.

4.6.5 StageStoArea Worksheet

The StageStoArea worksheet contains stage-storage and stage-area information for the three large lake systems: KCH, TOH, and ETO. The data used for these relationships (**Figure 4-3**) came from the development work done by Ken Konyha of the SFWMD when AFET was being developed in 2007. The stage-storage relationship is used with the daily routing to relate storage to stage. The stage-area relationship is used to compute lake surface areas to calculate corresponding ET volumes.

Although small lakes are not included in the StageStoArea worksheet (or in **Figure 4-3**), it should be noted that the large lakes represent 86% of the total storage capacity and total surface area of all managed lakes in the UKB at winter pool stages.

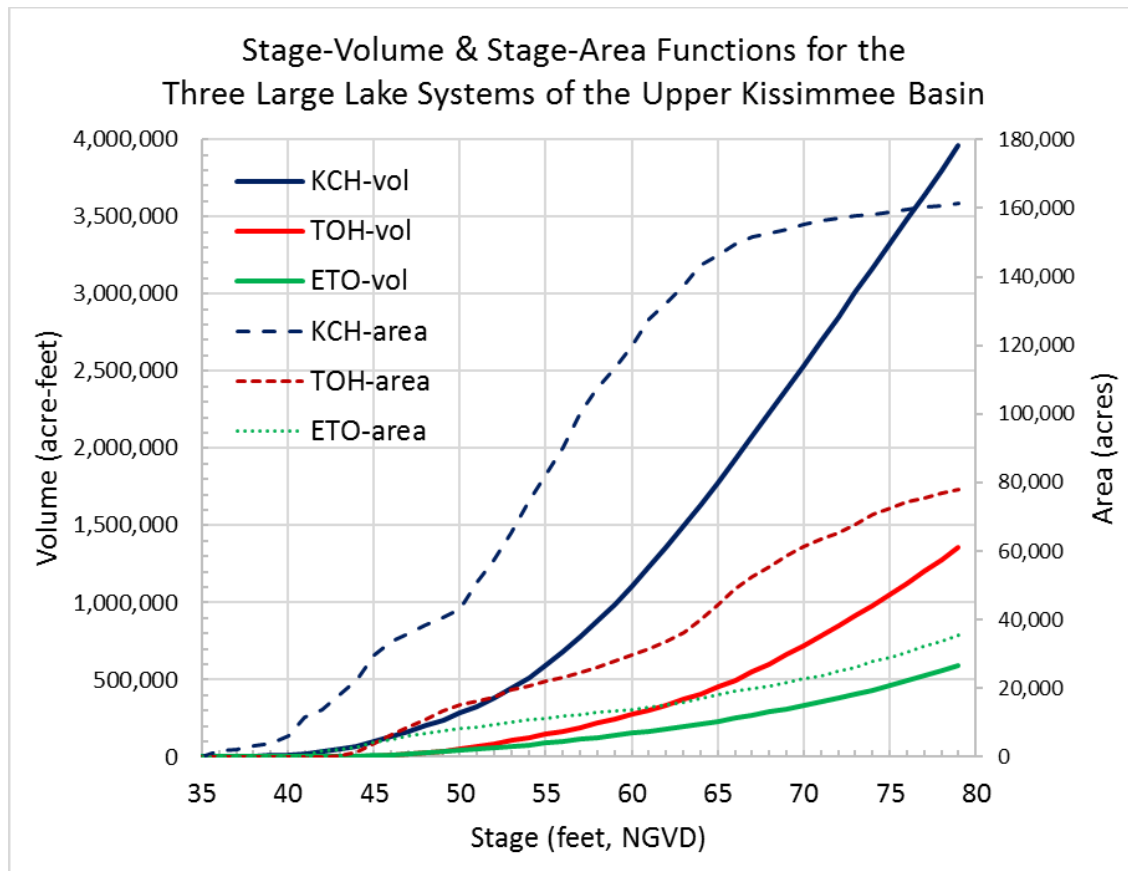


Figure 4-3. Stage-volume and stage-area relationships used by the UK-OPS Model.

5 MODEL OUTPUT

The UK-OPS Model outputs daily time series of stages and releases from the UKB's three largest lake systems into the user-specified ALT0, ALT1, ALT2, and ALT3 worksheets. The model also automatically generates graphical and tabular summaries of simulated performance for evaluating current or proposed operations and/or water supply withdrawal scenarios. These summaries access the pertinent outputs from the ALT worksheets and can be accessed via the buttons on the lower-right portion of the GUI (Figure 2-3). This section describes the specific outputs available in the current version of the model.

5.1 Measures of Performance

Simulation model outputs can be summarized in many ways. Traditional outputs include hydrographs (time-series plots of stage and/or flow), water budgets, and various statistical summaries of stage and flow critical to analysts and/or stakeholders. The term "performance measure" has a specific definition for hydrologic simulation modeling analysis in Central and South Florida. Performance measures are quantitative indicators of how well (or poorly) a simulation scenario meets a specific objective. They are a means to make relative comparisons among different test scenarios. Characteristics of a good performance measure are that it

- is quantifiable,
- has a specific target,
- indicates when that target has been reached, and/or
- measures the degree of improvement towards the target when the target has not been reached.

Performance measures are a special class of model outputs that enable a more conclusive interpretation of the simulations. Most UK-OPS Model outputs do not meet this definition of a performance measure. Rather, the UK-OPS Model outputs are better classified as performance indicators, or more generically, measures of performance. These do not have specific targets but are useful for making relative comparisons among alternative scenarios.

The UK-OPS Model output summary measures are hydrologic in nature, and many are considered ecological surrogates (e.g., S-65 annual average flow has a specific limit tied to the ecological health of the Kissimmee River). The UK-OPS Model automatically generates more than 20 output summary measures, classified into two groups: 1) daily stage and flow displays, and 2) hydrologic performance summaries.

Daily Stage and Flow Displays

The fundamental outputs from a hydrologic simulation model are flows and stages, commonly displayed using hydrographs. Typically, stage and flow series also are displayed as duration curves and percentile plots, which indicate the data distribution. These displays are produced by the UK-OPS Model and are described below.

5.2.1 Hydrographs

The TSplots worksheet can be accessed using the Hydrographs button. The worksheet contains stage and outflow hydrographs for the UKB's three large lake systems and have been very useful for detailed analyses. **Figure 5-1** is an example worksheet showing KCH and TOH. The plots have options to turn on/off particular simulations and regulation schedules. The slider bar enables viewing the entire plot, which also can be scaled to a specified time window. The hydrographs are aligned for easy comparison of the timing and magnitude of the stages and flows between the lakes.

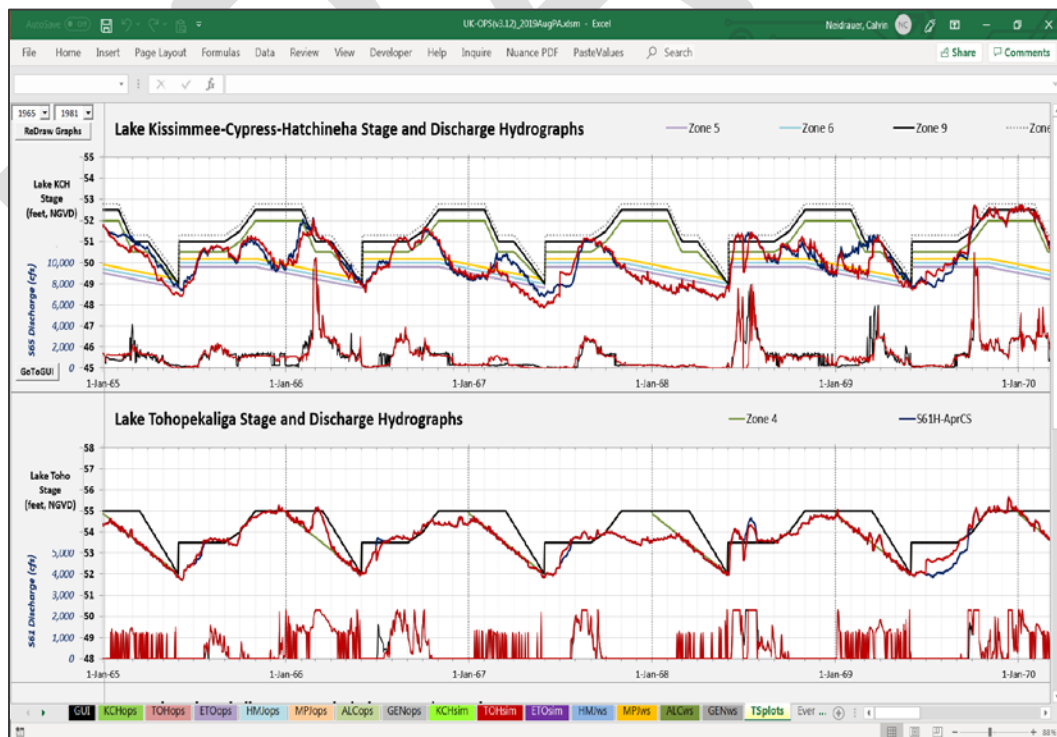


Figure 5-1. Sample stage and discharge hydrographs for Lakes Kissimmee, Cypress, and Hatchineha (top) and Lake Tohopekaliga (bottom).

5.2.2 Stage and Flow Duration

The StageDur and FlowDur worksheets can be accessed using the Stage Duration and Flow Duration buttons, respectively. Duration curves display the sorted output series, similar to a cumulative probability distribution function. The duration curves show the data range and indicate the value distribution. **Figures 5-2** and **5-3** are example stage and duration curves for KCH and S-65, respectively. The plots include options to select one of the three large lake systems and to turn on/off particular simulations.

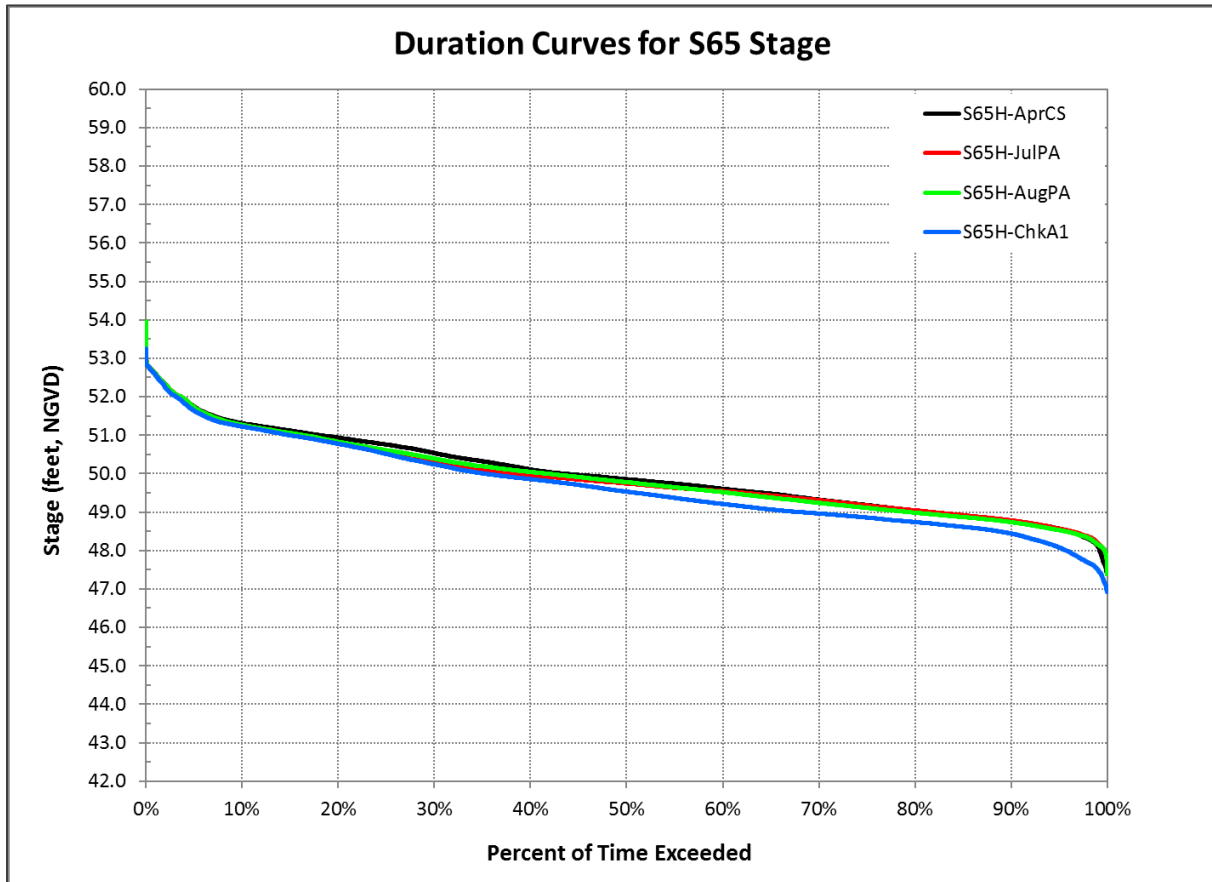


Figure 5-2. Sample stage duration curves for Lakes Kissimmee, Cypress, and Hatchineha.

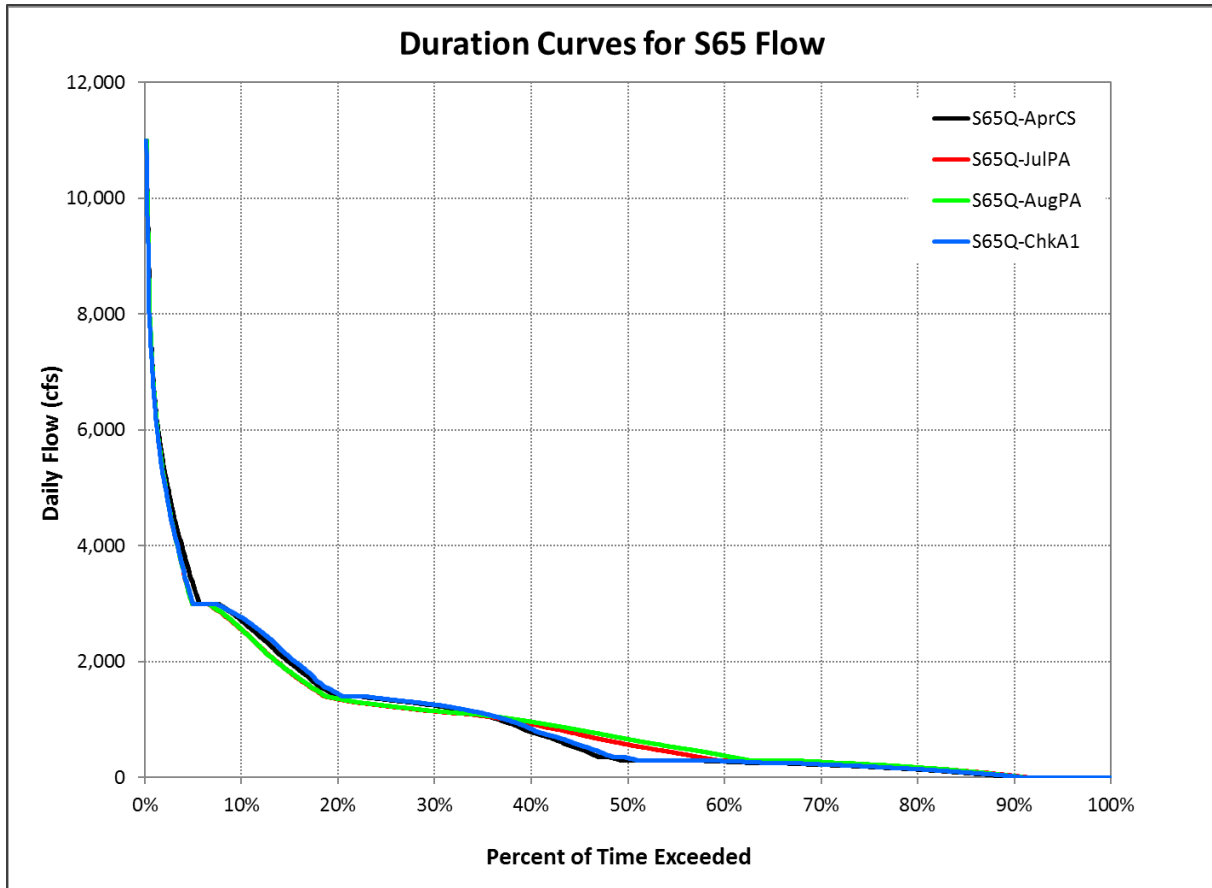


Figure 5-3. Sample flow duration curves for the S-65 structure.

5.2.3 Stage and Flow Percentiles

The StagePercsKCH, StagePercsTOH, and StagePercsETO worksheets contain charts of the stage percentiles for KCH, TOH, and ETO, respectively. These worksheets can be accessed using the corresponding KCH Stage Percentiles, TOH Stage Percentiles, and ETO Stage Percentiles buttons. Similarly, the FlowPercsKCH, FlowPercsTOH, and FlowPercsETO worksheets display flow percentiles for KCH, TOH, and ETO, respectively.

Percentiles are not hydrographs; rather, they are statistical summaries of the stage or flow distribution each day of the year. Percentiles are computed using all the years in the output; thus, for a 49-year simulation, each of the 365 days would have 49 data values for calculating each percentile statistic. The charts then connect the same percentile values for each day and display the iso-percentile curves. The percentile charts are helpful, particularly for position analysis simulations, to determine the probability of stages or flows exceeding particular values over time.

Figures 5-4 and 5-5 display example percentile plots for ETO stage and for KCH flow at the S-65 structure, respectively. The plots include options to specify the time window, percentiles of interest, and simulations to compare. The sample figures show outputs from a position analysis simulation, which initialized each of the 49 one-year simulations on July 1. The percentile plots also can be used for period-of-record simulations (i.e., a single 49-year simulation). Such plots are sometimes called cyclic analysis plots.

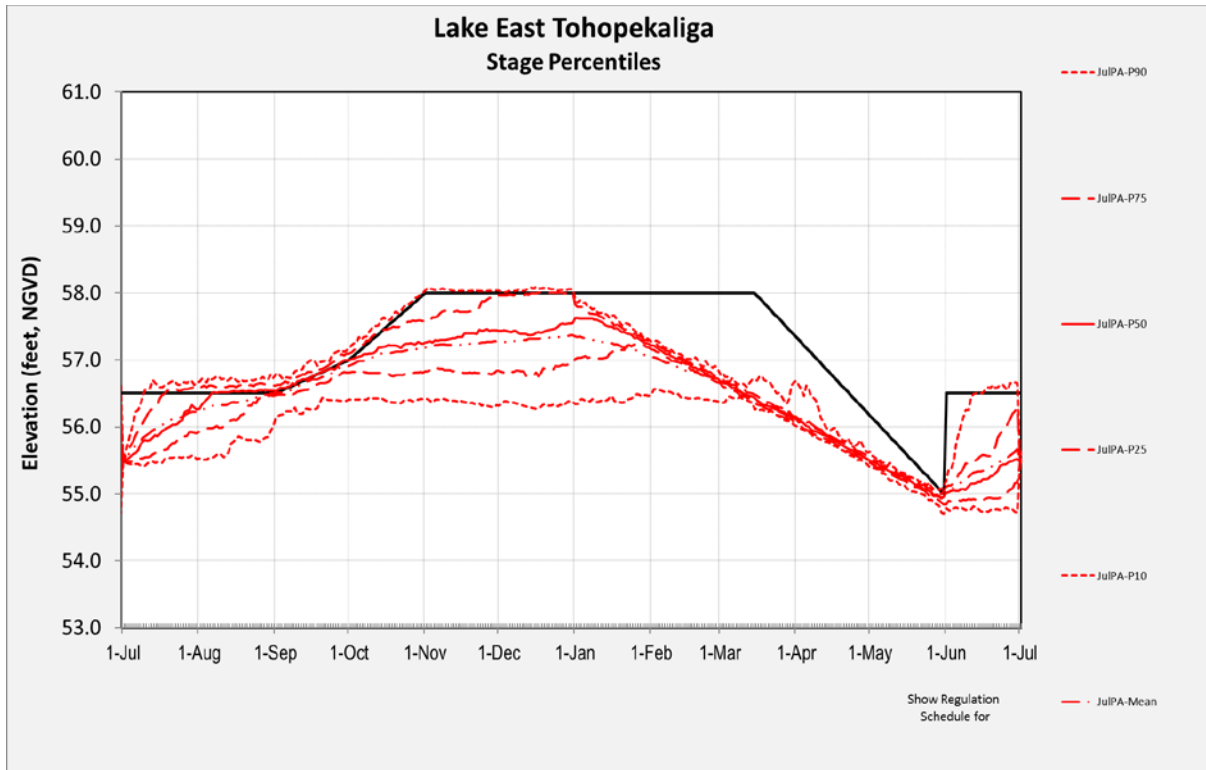


Figure 5-4. Sample stage percentile plot for East Lake Tohopekaliga.

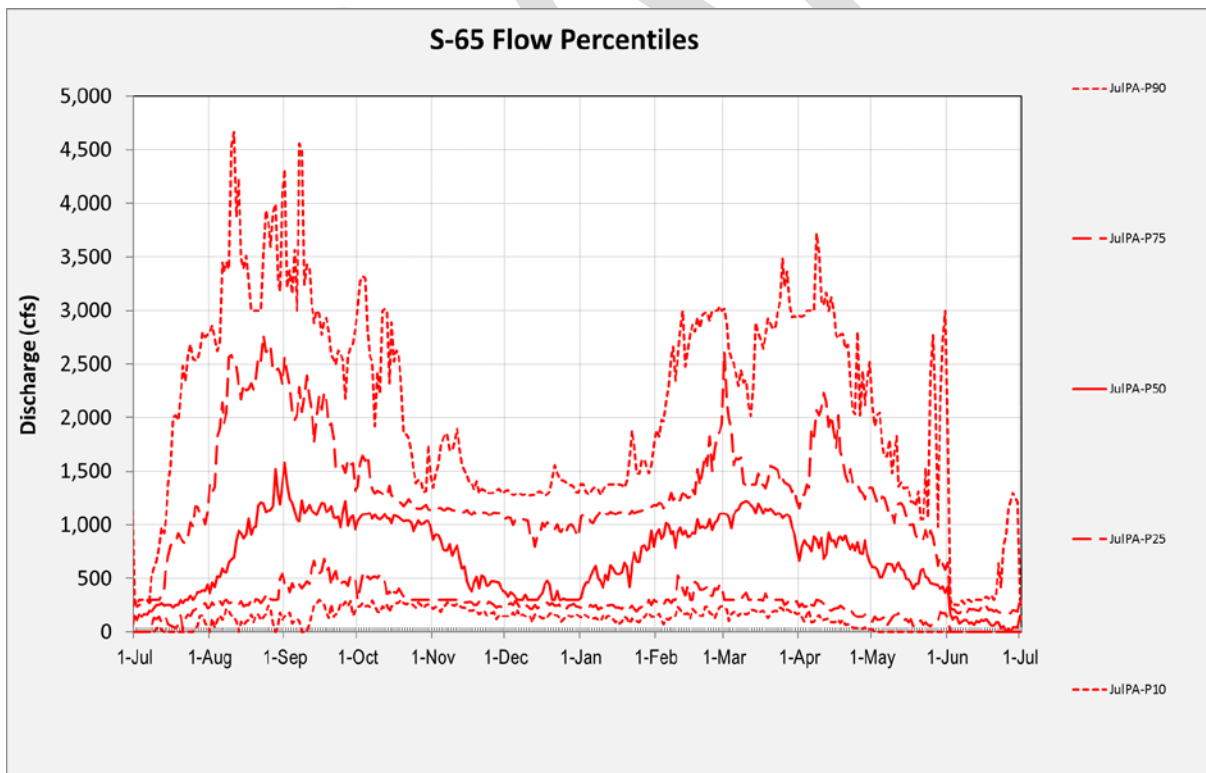


Figure 5-5. Sample flow percentile plot for Lakes Kissimmee, Cypress, and Hatchineha flows at the S-65 structure.

5.3 Hydrologic Performance Summaries

The UK-OPS Model automatically generates several measures of performance, most of which are derivatives of the fundamental stage and flow outputs and surrogates for ecological and/or water supply performance. New measures of performance typically are created based on the user's needs. Because the UK-OPS Model is a Microsoft Excel® application, modifying it to incorporate new measures, if desired, is relatively easy.

5.3.1 Water Budgets

The WatBuds worksheet can be accessed using the Water Budgets button. This worksheet contains charts that display the annual series of simulated water budget components for KCH, TOH, and ETO. **Figure 5-6** is an example showing KCH and TOH. The charts display the inflow components (WNI+RF and structure inflows) as positive values above the x-axis and the outflow components (ET, structure outflows, and water supply withdrawals) as negative values below the x-axis. Each year shows these components as stacked bars. The water year starts with the first month of position analysis simulations. For period-of-record simulations, the water year starts in January.

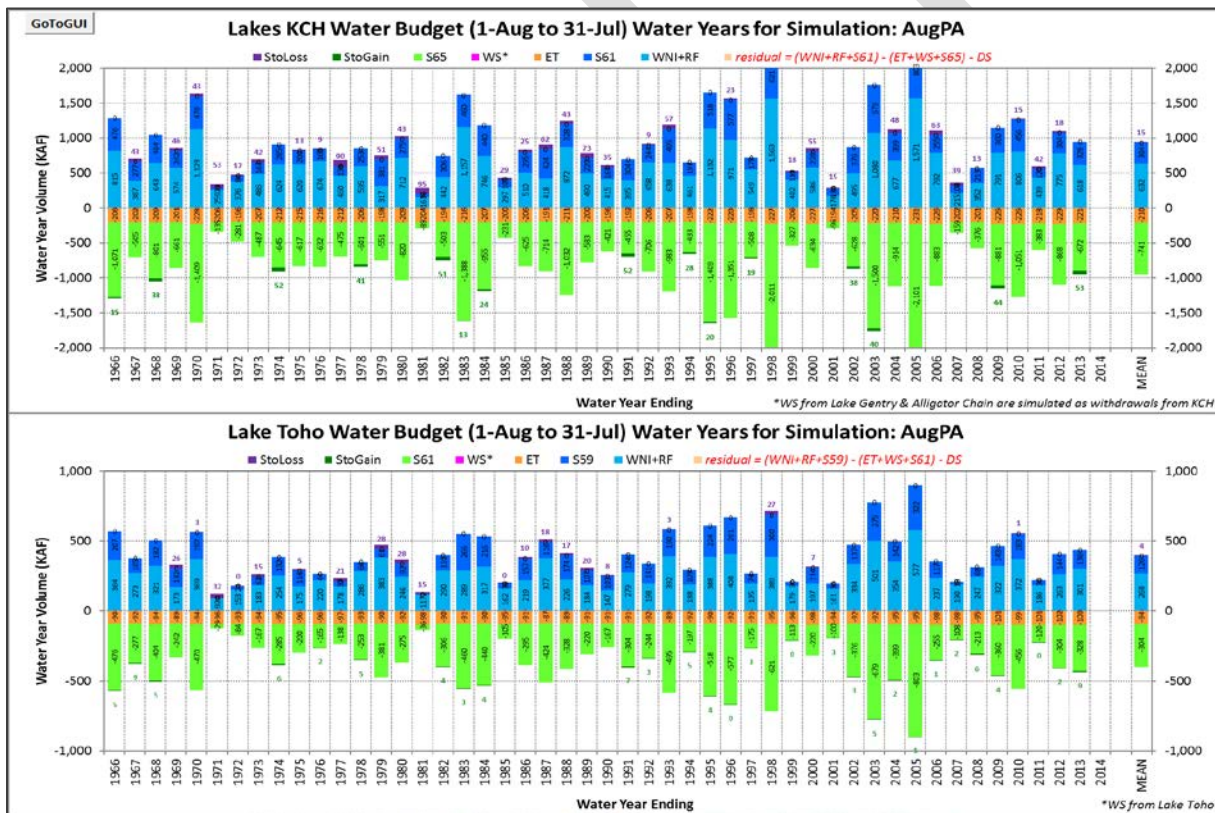


Figure 5-6. Sample water budgets for Lakes Kissimmee, Cypress, and Hatchineha and Lake Toho.

For years with inflows exceeding outflows, the storage gain is displayed at the bottom of the bars. For years with outflows exceeding inflows, the storage loss is displayed at the top of the bars. Thus, the height of the positive components should always equal the height of the negative components. If the heights differ, then there is a problem with the mass balance. The residual term should always be zero and is displayed on the budget chart as a data label along the x-axis. Mass is conserved if the residual is zero, and non-zero values

indicate a possible error in the mass balance, which would require correction prior to using the simulation results. Good modeling practice includes verifying mass conservation for every simulation; these charts help make that check.

5.3.2 Event Table and Plot

The Events worksheet can be accessed using the Event Table & TS Plot button. This worksheet enables analysis of user-specified stage and flow events for KCH, TOH, and ETO. The upper half of the worksheet allows selection of the site and data type, stage or flow threshold and whether to count events above or below the threshold, definition of a significant event duration, and optional specification of a seasonal window to limit the analysis. The lower half of the worksheet displays a time series of the events (**Figure 5-7**). The chart uses rectangles to indicate the start and end dates of each event, and the rectangle height represents the average magnitude of each event. Event summary statistics are shown on the left margin of the chart for each simulation. Note that the graphic is not generic enough to allow particular simulation outputs to be turned off. Furthermore, results for position analysis simulations may not be meaningful unless the event window is selected to not overlap with the start date of the 1-year position analysis simulations.



Figure 5-7. Sample event summary for Lake Tohopekaliga simulated stage.

5.3.3 Max D-day Inundation

The MaxStages worksheet can be accessed using the Max D-day Inundation button. This worksheet enables analysis of the maximum yearly stage that occurred for a user-specified minimum duration of consecutive days and during a user-specified date window. The example chart in **Figure 5-8** shows a sample for KCH. The specified duration (D) was 30 days. The date window was August 1 to December 31. The chart compares four simulations year-by-year by showing the yearly maximum stage meeting the aforementioned criteria. The chart also has a dropdown menu to select the desired large lake system. Some of the less frequently used parameter inputs (e.g., the date window) are located under the chart and can be changed by temporarily moving the chart. Dropdown menus can be added to enable easier selection of the date window.

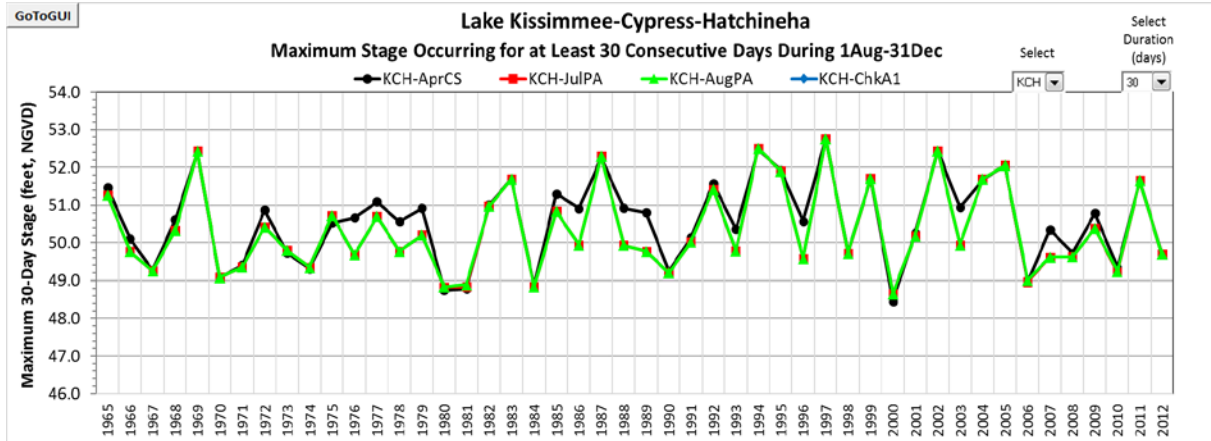


Figure 5-8. Sample maximum annual stage comparison at Lakes Kissimmee, Cypress, and Hatchineha.

An additional chart is displayed in the MaxStages worksheet to make relative comparisons between simulations (Figure 5-9). The annual values from the maximum stage chart for a prescribed baseline (AprCS in this example) are subtracted from the year-by-year values of the other simulations. Then the distribution of the yearly differences is displayed for each simulation using box and whisker plots. This relative performance comparison is similar to calculations for a paired T-test and helps illustrate the magnitude of the difference in maximum stages across the entire simulation period.

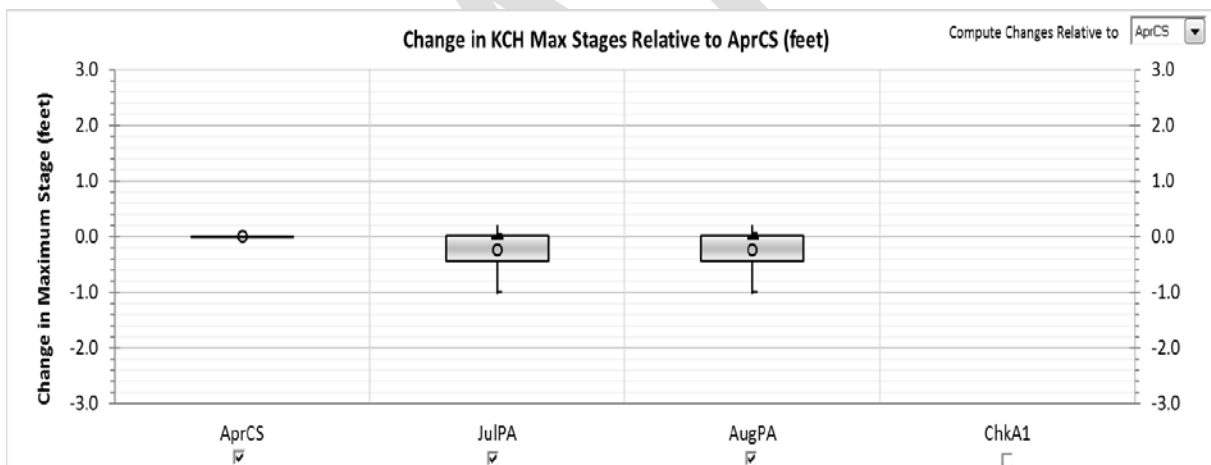


Figure 5-9. Sample event summary for Lake Tohopekaliga simulated stage.

A final note about the above two charts pertains to the check boxes located below the simulation names at the bottom of Figure 5-9. The check boxes control the display of the simulation output. The simulation named “ChkA1” is not displayed on either chart.

5.3.4 S-65 Annual Flow

The S65VolComp worksheet can be accessed using the S65 Annual Flow button. This worksheet enables evaluation of the effects of upstream operations and/or water supply withdrawals on the annual S-65 outflows from KCH.

The KRCOL Water Reservation set a maximum S-65 flow reduction limit of 5% for the period between 1965 and 2005. The baseline for evaluating proposed water supply withdrawals is the mean annual simulated S-65 flow for that period. The baseline simulation used historical data for WNI+RF, assumed the

future expected operation under the authorized Headwaters Revitalization Schedule for KCH, and assumed the current authorized regulation schedules for ETO and TOH. The 41-year mean annual S-65 flow from this baseline simulation is 704,000 acre-feet/year.

The performance metric shown in **Figure 5-10** was developed for the UK-OPS Model to compare simulations of proposed water supply withdrawals with the baseline flow limit. The chart shows the distribution of annual simulated flow at the S-65 structure via box and whisker plots. The mean annual flow is shown as a labeled dot on the plots. The x-axis labels display the percent change relative to the baseline simulation 41-year mean. The ChkHRS simulation in **Figure 5-10** represents the baseline condition. The mean for the ChkHRS simulation is 704,000 acre-feet/year and the percent change on the axis label is zero.

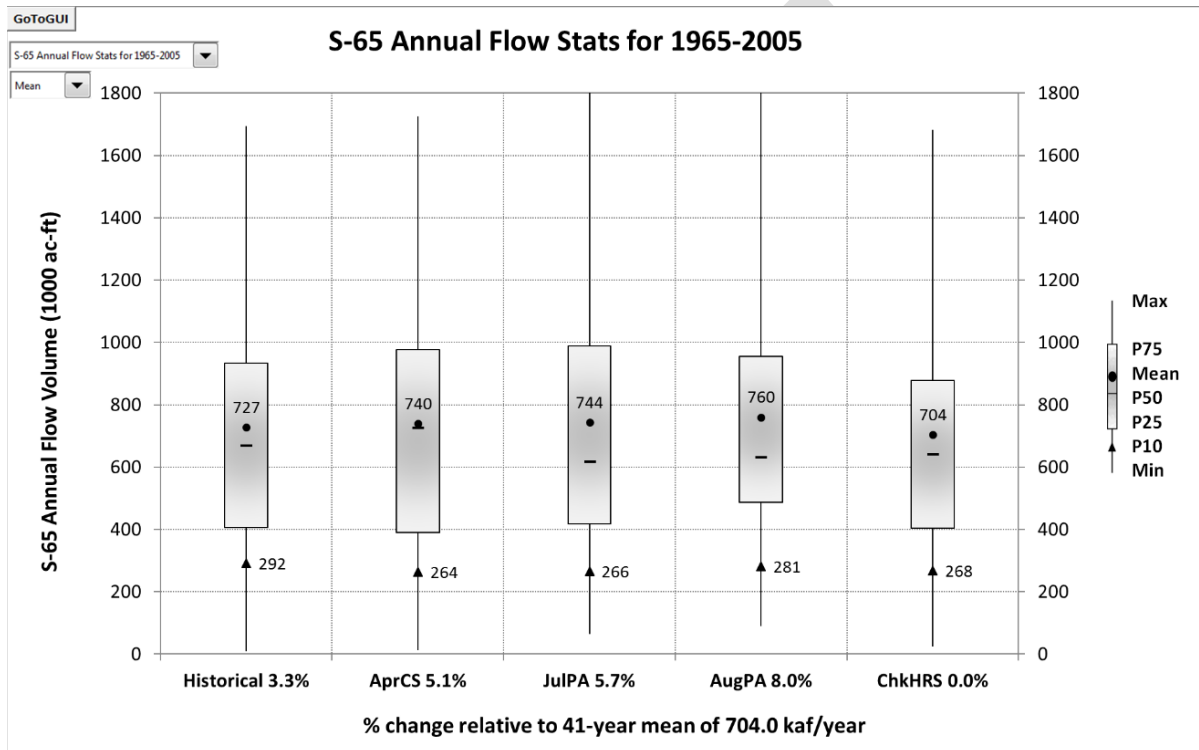


Figure 5-10. Sample annual flow statistics for the S-65 structure.

5.3.5 Water Supply Reliability

The WS_Table worksheet can be accessed using the WS Reliability button. This worksheet contains a table showing the number of days per month that water supply withdrawals occurred during the simulation. User controls allow specification of the lake system of interest: TOH, ETO, HMJ, MPJ, ALC, or GEN. Water withdrawals from KCH are not allowed by the draft KRCOL Water Reservation rules, so KCH is not included in the table. User controls also enable selection of the simulation name, a target reliability (percentage of time with water supply withdrawals) for computing performance, and the period for computing summary statistics.

Table 5-1 is an example water supply reliability table for a TOH water supply withdrawal scenario. The shaded cell values indicate the number of days in each month of each simulation year that water withdrawals occurred. The greens designate more days of withdrawals, whereas the oranges/reds indicate fewer days. The right side of the table summarizes the volumes withdrawn and the percent of time they occurred by season and by year. The summary at the bottom shows frequency statistics and the number of years that meet the user-specified reliability.

3905 Table 5-1. Sample water supply reliability table for Lake Tohopekalgiga.

Lake TOH Water Supply Reliability Table for JF_WS																Percent of Time WS Withdrawal			
No. of Days per Month with Lake Toho WS Withdrawals at 23.2 cfs (15.0 MGD)													Days	Vol(kaf)	AvgMGD	CalYear	WetSeas	DrySeas	WatYear
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	May-Oct	Nov-Apr	May-Apr
1965	0	5	16	22	28	1	13	31	8	12	0	16	152	7.00	6.25	41.6%	50.5%		
1966	11	6	7	22	31	14	31	24	9	6	0	0	161	7.41	6.62	44.1%	62.5%	43.9%	42.5%
1967	0	15	18	22	24	1	13	31	20	1	0	0	145	6.68	5.96	39.7%	48.9%	37.3%	46.6%
1968	0	0	0	12	26	27	31	31	10	0	0	0	137	6.31	5.61	37.4%	67.9%	17.8%	27.9%
1969	23	9	6	22	29	1	0	0	6	30	8	6	140	6.45	5.75	38.4%	35.9%	42.0%	50.7%
1970	7	6	7	22	23	1	4	20	0	0	0	0	90	4.14	3.70	24.7%	26.1%	37.3%	33.4%
1971	0	0	0	3	18	0	0	0	0	0	0	0	21	0.97	0.86	5.8%	9.8%	9.9%	14.0%
1972	0	0	0	21	23	5	31	26	8	0	0	0	114	5.25	4.67	31.1%	50.5%	20.7%	10.7%
1973	0	25	18	21	23	1	0	16	30	5	0	0	139	6.40	5.71	38.1%	40.8%	41.0%	43.0%
1974	0	1	13	30	29	3	31	31	14	1	0	0	153	7.04	6.29	41.9%	59.2%	34.4%	32.6%
1975	0	0	0	22	28	1	0	30	24	8	5	0	118	5.43	4.85	32.3%	49.5%	23.6%	35.9%
1976	5	19	7	22	25	16	31	28	10	1	0	0	164	7.55	6.72	44.8%	60.3%	39.0%	40.7%
1977	7	23	7	23	27	1	0	5	15	4	0	3	115	5.29	4.73	31.5%	28.3%	41.0%	46.8%
1978	23	17	7	21	28	1	12	29	4	0	0	0	142	6.54	5.84	38.9%	40.2%	46.7%	33.7%
1979	4	28	12	22	31	1	0	2	27	9	0	0	136	6.26	5.59	37.3%	38.0%	45.8%	38.4%
1980	21	11	8	21	27	1	0	0	0	0	0	0	89	4.10	3.65	24.3%	15.2%	41.3%	35.8%
1981	0	0	0	0	6	1	0	3	29	1	0	14	54	2.49	2.22	14.8%	21.7%	2.8%	7.7%
1982	18	7	6	21	31	30	21	21	9	4	0	0	168	7.73	6.90	46.0%	63.0%	45.8%	29.0%
1983	9	17	7	21	29	22	30	21	9	6	7	6	184	8.47	7.56	50.4%	63.6%	39.2%	46.6%
1984	7	7	8	22	29	1	29	30	7	0	0	0	140	6.45	5.74	38.3%	52.2%	40.4%	47.5%
1985	0	0	3	30	26	1	6	31	26	2	0	0	125	5.75	5.14	34.2%	50.0%	27.8%	35.3%
1986	23	7	7	23	25	0	0	23	17	0	0	0	125	5.75	5.14	34.2%	35.3%	40.1%	41.6%
1987	30	12	6	21	29	1	0	0	0	0	20	21	140	6.45	5.75	38.4%	16.3%	46.2%	36.7%
1988	6	7	8	22	26	1	0	12	28	0	2	22	134	6.17	5.49	36.6%	36.4%	51.6%	31.1%
1989	7	4	10	22	26	0	0	18	20	9	0	0	116	5.34	4.77	31.8%	39.7%	43.9%	36.7%
1990	0	4	31	23	23	1	0	21	3	0	0	0	106	4.88	4.36	29.0%	26.1%	38.2%	35.9%
1991	0	0	20	30	31	30	23	21	5	9	0	0	169	7.78	6.95	46.3%	64.7%	38.2%	26.8%
1992	0	13	21	20	30	13	31	27	9	4	6	10	184	8.47	7.54	50.3%	62.0%	39.4%	47.3%
1993	7	6	6	22	27	1	9	3	15	0	0	0	96	4.42	3.95	26.3%	29.9%	39.6%	46.8%
1994	1	28	14	21	29	22	28	20	8	4	10	7	192	8.84	7.89	52.6%	60.3%	43.9%	32.6%
1995	7	7	7	22	29	1	6	31	23	7	8	6	154	7.09	6.33	42.2%	52.7%	42.0%	46.8%
1996	7	7	7	21	30	25	27	20	8	7	0	0	159	7.32	6.52	43.4%	63.6%	40.4%	41.8%
1997	11	16	7	21	31	1	19	30	7	0	1	26	170	7.83	6.99	46.6%	47.8%	40.6%	47.1%
1998	7	6	7	22	28	1	0	0	5	7	0	0	83	3.82	3.41	22.7%	22.3%	45.8%	43.0%
1999	0	25	18	22	28	4	31	29	15	7	7	7	193	8.88	7.93	52.9%	62.0%	43.9%	29.0%
2000	7	7	8	22	26	1	0	10	14	0	0	0	95	4.37	3.89	26.0%	27.7%	39.4%	47.0%
2001	0	0	0	13	24	1	28	27	17	2	0	0	112	5.16	4.60	30.7%	53.8%	17.5%	17.5%
2002	0	18	18	22	22	16	31	26	9	2	12	6	182	8.38	7.48	49.9%	57.6%	37.7%	43.0%
2003	7	7	6	22	30	23	27	19	9	4	2	15	171	7.87	7.03	46.8%	60.9%	42.5%	45.5%
2004	7	7	7	22	30	1	28	30	13	8	7	7	167	7.69	6.84	45.6%	59.8%	42.3%	47.0%
2005	7	6	7	21	31	28	20	20	2	7	12	7	168	7.73	6.90	46.0%	58.7%	40.6%	45.2%
2006	8	7	7	22	27	0	19	16	29	0	0	0	135	6.21	5.55	37.0%	49.5%	42.5%	46.8%
2007	0	25	16	22	20	24	31	23	13	3	1	1	179	8.24	7.36	49.0%	62.0%	39.2%	42.2%
2008	12	15	8	21	26	1	12	30	21	5	0	0	151	6.95	6.19	41.3%	51.6%	39.4%	47.0%
2009	0	2	14	30	28	30	28	21	9	1	0	12	175	8.06	7.19	47.9%	63.6%	34.9%	38.6%
2010	13	6	5	21	31	30	23	2	0	2	0	0	133	6.12	5.47	36.4%	47.8%	41.5%	47.7%
2011	0	15	26	22	25	1	18	31	19	7	6	4	174	8.01	7.15	47.7%	54.9%	41.5%	41.4%
2012	3	14	8	22	26	6	31	31	13	3	0	0	157	7.23	6.43	42.9%	59.8%	39.0%	43.2%
2013	0	0	13	30	30	24	31	24	9	3	0	0	164	7.55	6.74	44.9%	65.8%	34.4%	41.9%
MEANS																			
48YR	6	10	9	21	27	9	16	20	12	4	2	4	140	6.46	5.76	38.4%	47.5%	37.5%	38.4%
41YR	7	9	9	21	27	7	14	19	12	4	3	4	137	6.29	5.61	37.4%	45.7%	37.4%	37.4%
SUMMARY STATISTICS																CalYear	WetSeas	DrySeas	WatYear
No. of years used for stats																49	49	48	48
Years used for stats																'65-'13	'65-'13	'66-'13	'66-'13
# Yrs with WS duration > 50%																4	26	1	1
Annual Exceedance Frequency																8.2%	53.1%	2.1%	2.1%
Return Period (1-in-Nyrs)																12.3	1.9	48.0	48.0

3908 **5.3.6 Seasonal Distributions of Stage and Flow**

3909 The BoxWhiskerStage and BoxWhiskerFlow worksheets can be accessed using the Mon-Stage
3910 BoxWhisker and Mon-Flow BoxWhisker buttons, respectively. The stage chart compares the average daily
3911 stage for each month of each simulation (Figure 5-11). The flow chart compares the mean daily flow for
3912 each month of each simulation (Figure 5-12). These charts allow comparison of the monthly distributions
3913 for the user-specified simulations and sites; they also show the seasonal distributions of stages and flows.
3914 The box and whisker plots within each month are not labeled but are in the same order as shown in the
3915 legend.

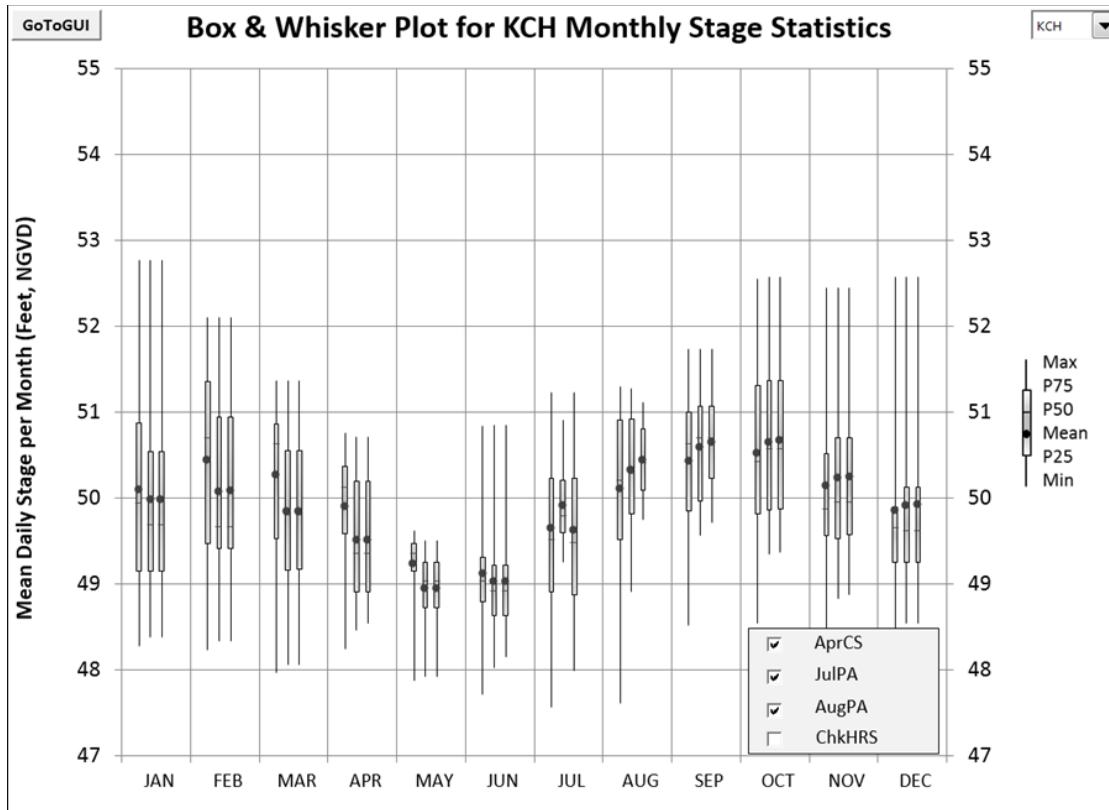


Figure 5-11. Sample monthly stage distributions at Lakes Kissimmee, Cypress, and Hatchineha.

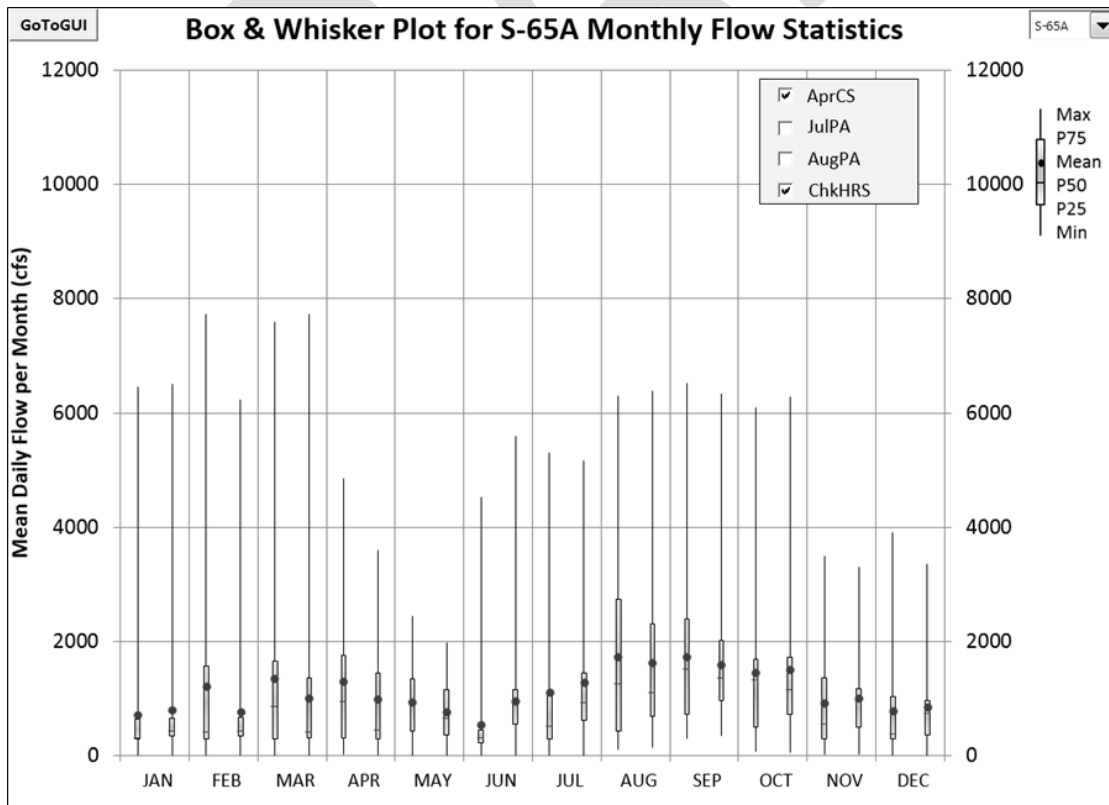


Figure 5-12. Sample monthly flow distributions at the S-65A structure.

6 MODEL VALIDATION

This section compares UK-OPS Model outputs to corresponding input data to demonstrate that the model produces reliable outputs. As described in **Sections 1** and **4**, the UK-OPS Model does not simulate the rainfall-runoff hydrologic process. Instead, it computes watershed inflows to each lake using key hydrologic information from detailed hydrologic models or the historical record. The version of the UK-OPS Model described in this report used the historical data record as the input data set for calculating the boundary condition inflows, namely the WNI+RF. Thus, the UK-OPS Model is not calibrated and validated in the same way as the supporting hydrologic models.

A validation simulation was performed that set the simulated outflows from the UKB's three large lake systems equal to the outflows used to calculate the boundary conditions (WNI+RF). This test aimed to validate the routing calculations by demonstrating the simulated stages were consistent with historical stages.

6.1 Lake Stage Comparisons

By setting the simulated outflows equal to the outflows used to calculate the boundary conditions (WNI+RF), the routing equations were expected to replicate the stage series used to calculate the boundary inflows. For the version of the UK-OPS Model described in this report, historical data were used to calculate the boundary conditions.

Figures 6-1 and **6-2** illustrate the stage and discharge hydrographs for KCH, TOH, and ETO for the first and last 8 years, respectively, of the 49-year simulation. The red traces represent the validation simulation (Val1), and they completely coincide with, and cover, the black traces representing the historical data (Hist). From these comparisons it is concluded that the routing equations in the UK-OPS Model are correct.

Figures 6-3, 6-4, and 6-5 show the stage duration curves for KCH, TOH, and ETO, respectively, for the entire 49-year simulation period. These figures also show the red curves for the validation simulation completely coincide with, and cover, the black traces representing the historical values.



Figure 6-1. Simulated validation (red) and historical (black) hydrographs for 1965 to 1972.

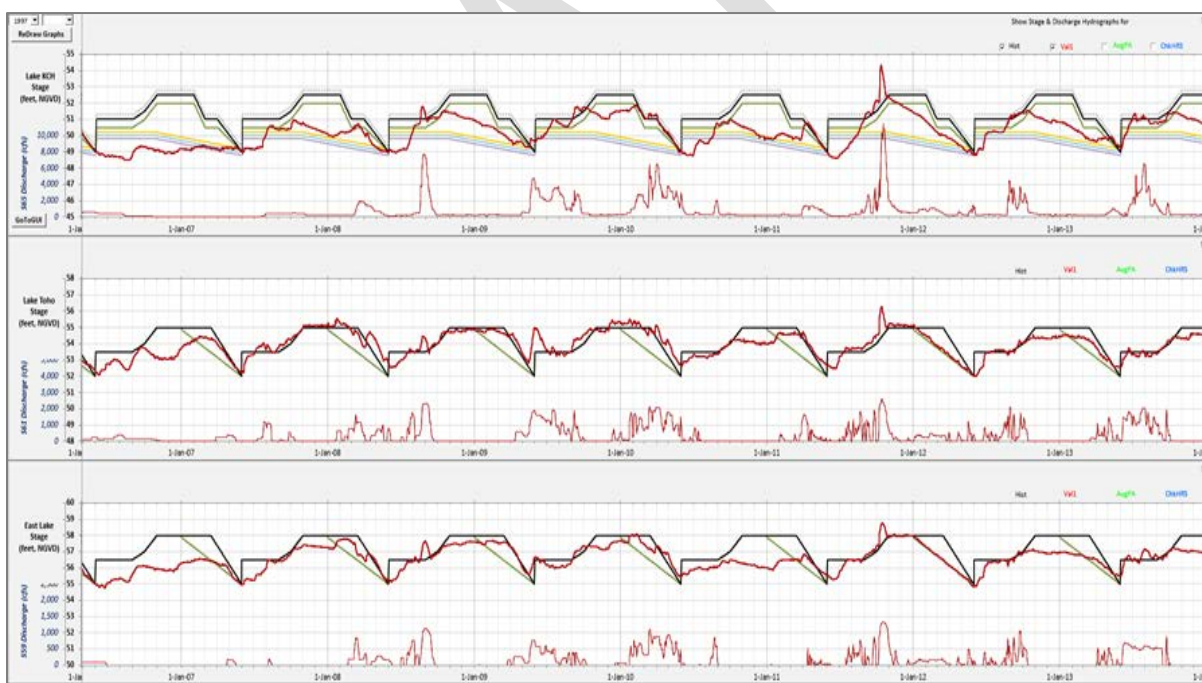


Figure 6-2. Simulated validation (red) and historical (black) hydrographs for 2006 to 2013.

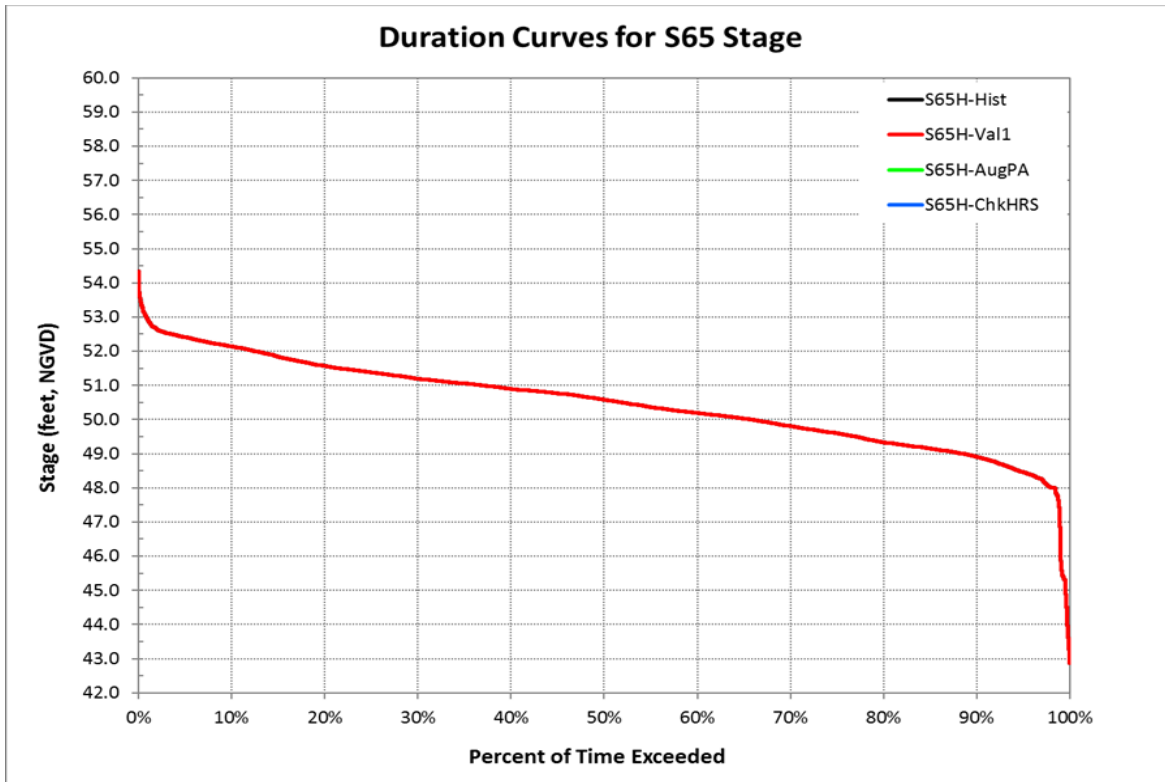


Figure 6-3. Lakes Kissimmee, Cypress, and Hatchineha stage duration curves: simulated validation (red) and historical (black; directly behind red line).

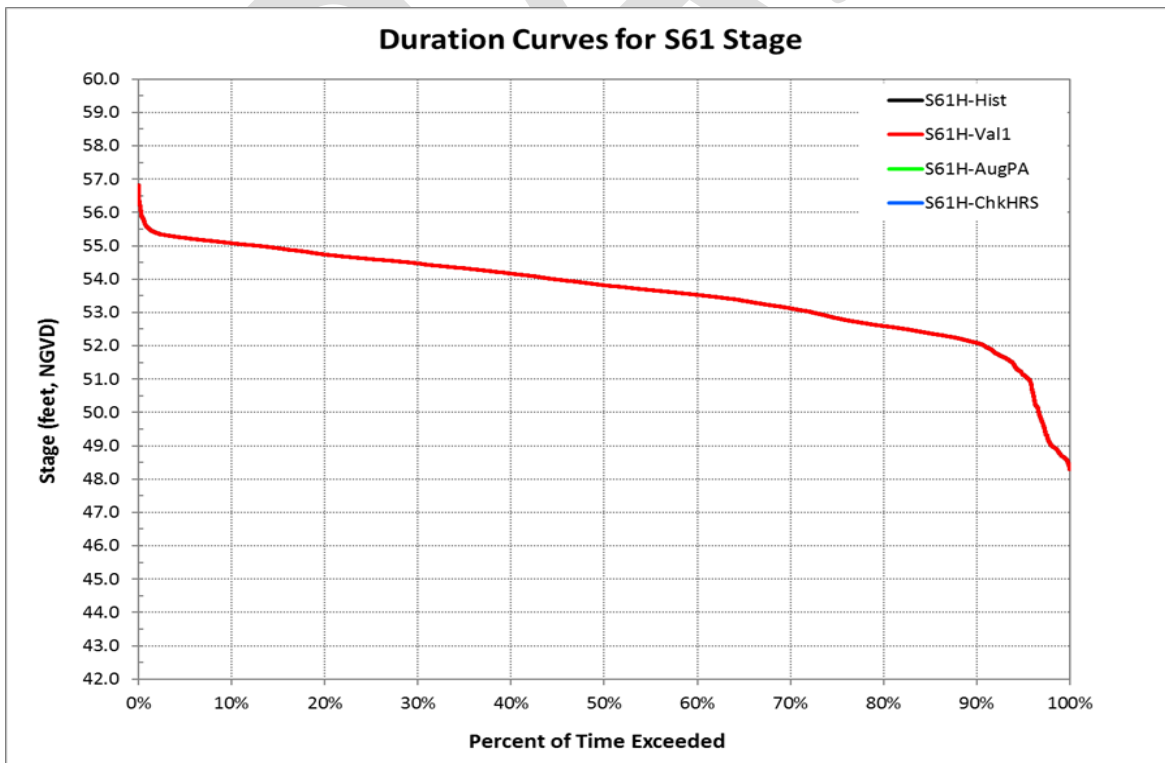


Figure 6-4. Lake Tohopekaliga stage duration curves: simulated validation (red) and historical (black; directly behind red line).

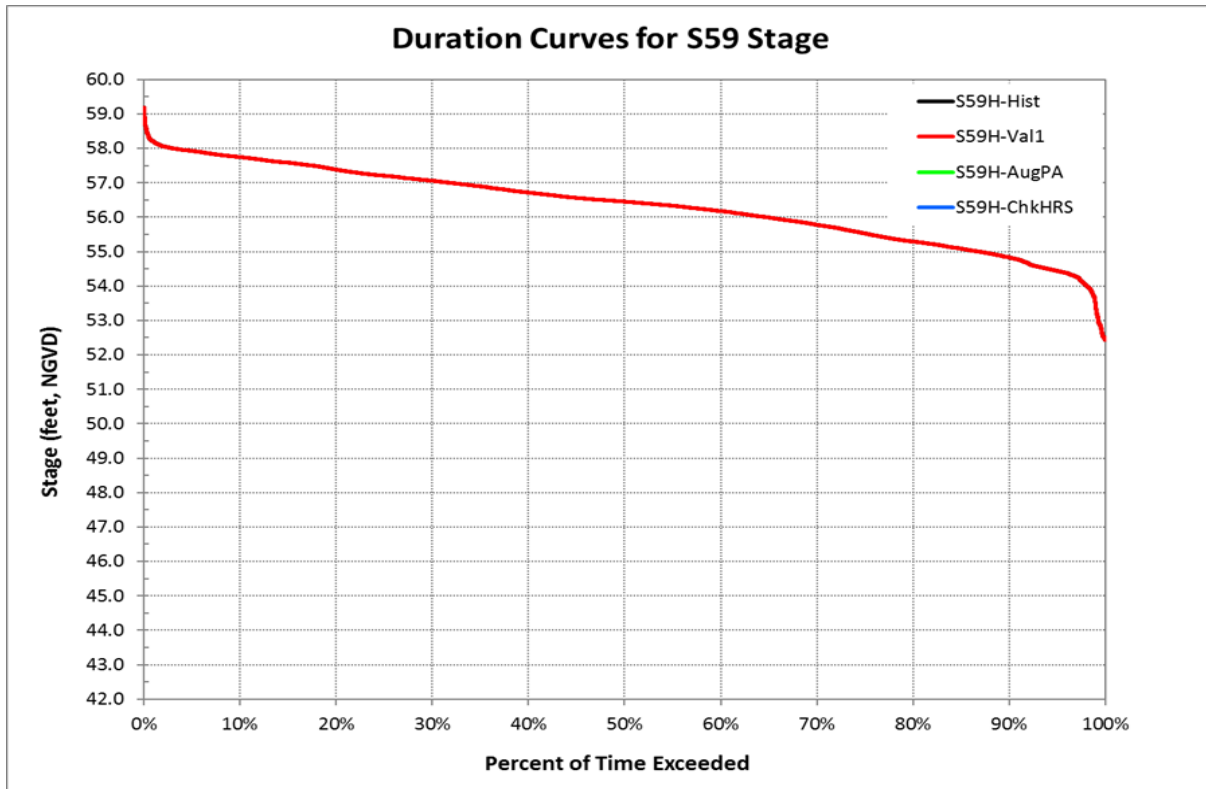


Figure 6-5. East Lake Tohopekaliga stage duration curves: simulated validation (red) and historical (black; directly behind red line).

6.2 Water Budget Comparisons

A fundamental requirement of any hydrologic model is that it conserves mass. In other words, the flows must be accounted for and the model should not create or destroy water (mass). **Figures 6-6, 6-7, and 6-8** compare the validation simulation and historical annual water budgets for KCH, TOH, and ETO, respectively. Residuals in the water balance are calculated as inflows minus outflows minus storage change, and zero values demonstrate mass balance. Inspection of these budgets shows identical results, verifying the validation simulation reproduces the historical input data and thus conserves mass.

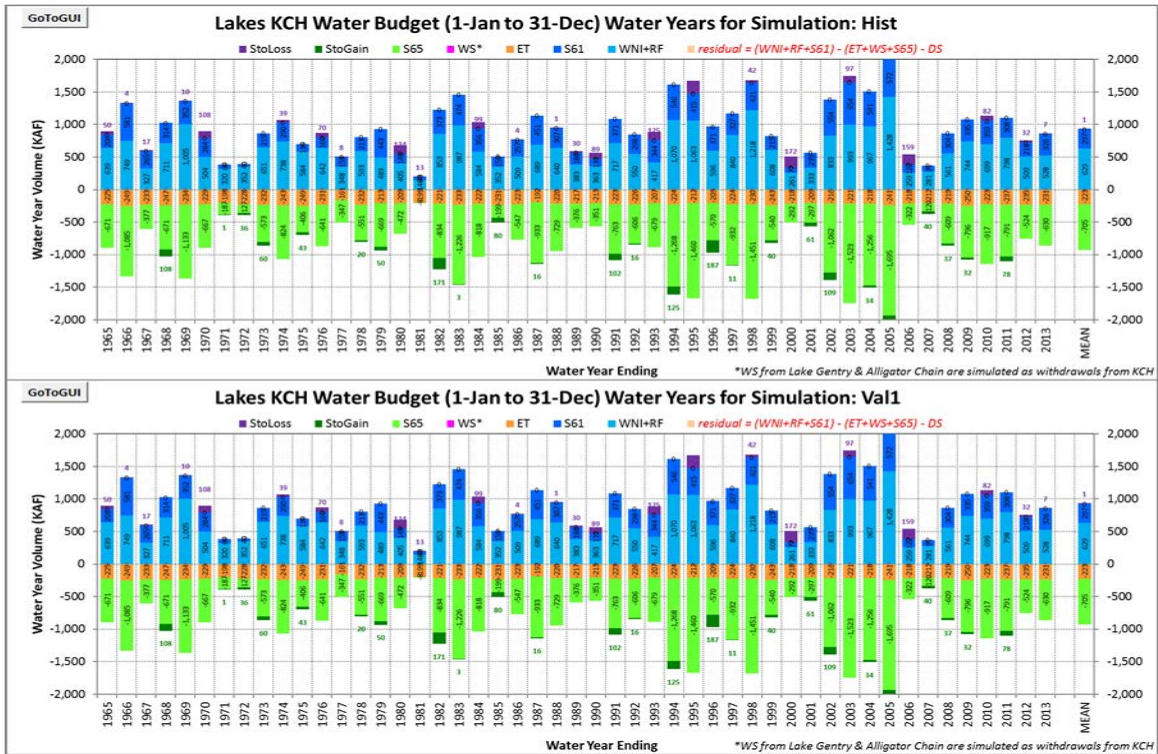


Figure 6-6. Lakes Kissimmee, Cypress, and Hatchineha annual water budgets: historical (top) and simulated validation (bottom).

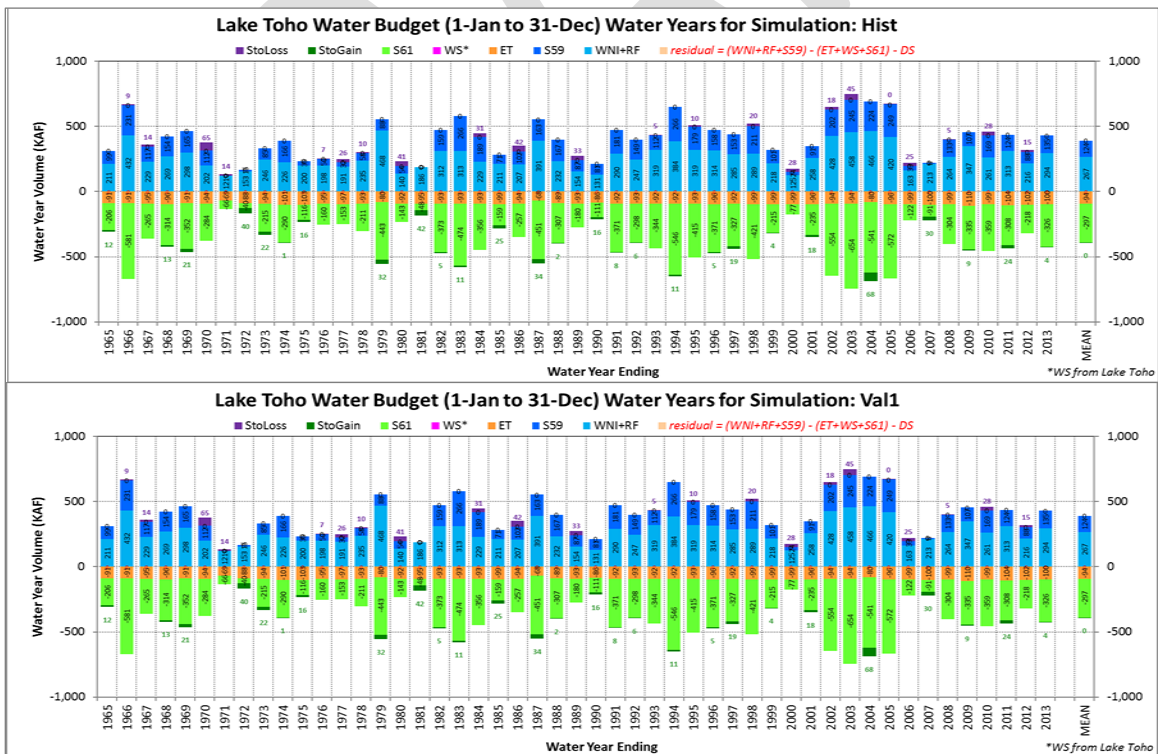


Figure 6-7. Lake Tohopekaliga annual water budgets: historical (top) and simulated validation (bottom).

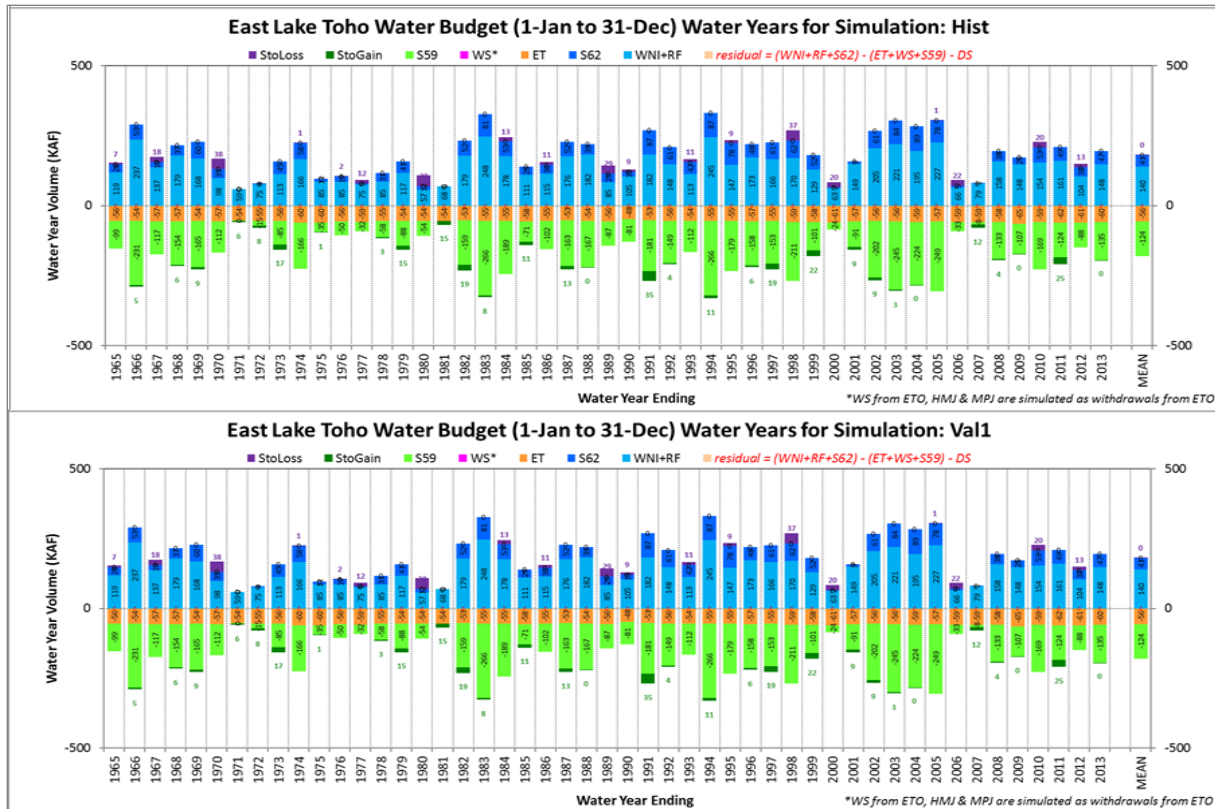


Figure 6-8. East Lake Tohopekaliga annual water budgets: historical (top) and simulated validation (bottom).

7 APPLICATIONS

The UK-OPS Model has been used for several applications since it was originally developed in 2014. This section briefly summarizes the purposes and findings from two of these applications to demonstrate some of the typical and appropriate uses of the model: 1) the SFWMD's monthly position analysis in support of the Operations Planning Program; and 2) a sensitivity analysis to demonstrate potential effects of the draft KRCOL Water Reservation rules from a hypothetical water withdrawal scenario.

Other applications of the UK-OPS Model not described in this report include: 1) pump sizing analysis to support the planning of the proposed ETO drawdown; 2) seasonal operations planning to design and evaluate alternative operations for KCH, TOH, and ETO; and 3) evaluation of the proposed Lake Toho Restoration/Alternative Water Supply Project. The Lake Toho Restoration/Alternative Water Supply Project evaluation was the first use of the UK-OPS Model to test impacts of proposed water withdrawals subject to the draft KRCOL Water Reservation rules.

7.1 SFWMD Position Analysis

Position analysis is a special form of risk analysis evaluated from the present position of the system. A position analysis evaluates water resource systems and the risks associated with operational decisions (Hirsh 1978). The SFWMD Dynamic Position Analysis (DPA) is an application of the South Florida Water Management Model (SFWMM) (SFWMD 2005) to estimate the probability distributions of stages and flows for Lake Okeechobee and the system south of the lake for the upcoming 11 months. The SFWMM DPA is deemed dynamic because it includes a 1-month warmup period to synchronize the simulated

3991 antecedent hydrology with the actual hydrology. Details of the DPA are available on the SFWMD's
3992 Operations Planning webpage: <https://www.sfwmd.gov/science-data/operational-planning>.

3993 The SFWMM relies on S-65E boundary inflows from another model. The UK-OPS Model has provided
3994 the S-65 flow boundary condition since 2015 when it was discovered that the previous model, the Upper
3995 Kissimmee Chain of Lakes Routing Model (UKISS) significantly underestimated S-65 flows for the
3996 1997-1998 El Niño (very wet) period. Because the UK-OPS Model had the option to base the UKB
3997 hydrology on historical data, it was selected to support the SFWMM DPA until detailed basin models were
3998 updated and recalibrated.

3999 Whenever a DPA is needed, usually at beginning of each month, the following UK-OPS Model steps are
4000 executed to produce the S-65 flow series, which is further processed by a river routing model for the Lower
4001 Kissimmee Basin to yield the SFWMM boundary flows at the S-65E structure.

- 4002 1. Review seasonal operating strategy and modify the UK-OPS Model assumptions, as necessary.
- 4003 2. Determine the initial stage values using real-time posted stage values for KCH, TOH, and ETO,
4004 and enter initial stages and start date in the UK-OPS Model GUI.
- 4005 3. Run the model and evaluate key performance metrics, including water budgets, stage and discharge
4006 hydrographs, and percentile plots.
- 4007 4. Communicate results to the operations planning team for further processing and preparation of the
4008 SFWMM DPA. The **Attachment** contains an example email communicating the assumptions and
4009 results for the August 2019, UK-OPS Model position analysis simulations.

4010 **Figure 7-1** illustrates the S-65 flow percentile chart for the August position analysis simulation. The
4011 distribution shows the high variability in flow as early as 2 to 4 weeks after the August 1 initialization. It is
4012 important to note that the position analysis is not a forecast but rather a distribution of possible outcomes
4013 based on the variability of historical rainfall conditions.

4014 **Figures 7-2, 7-3, and 7-4** show the stage percentile plots for the August position analysis simulations for
4015 ETO, TOH, and KCH, respectively. These percentile plots illustrate the distribution of stages each day of
4016 the 1-year look-ahead period. The charts represent the probability distributions of lake stages for each day
4017 of the upcoming year, assuming current initial conditions and the rainfall for each simulation year is equally
4018 likely to occur.

4019 The percentile charts for TOH and ETO show the relatively tight distribution of stages during the January
4020 to May spring recession operation. The KCH percentiles show wide variability, particularly during the
4021 November to May dry season. Stages in KCH tend to track well-below the top of the regulation schedule
4022 because the operations are designed to discharge meaningful flows to the Kissimmee River when the stage
4023 is below the top of the regulation schedule.

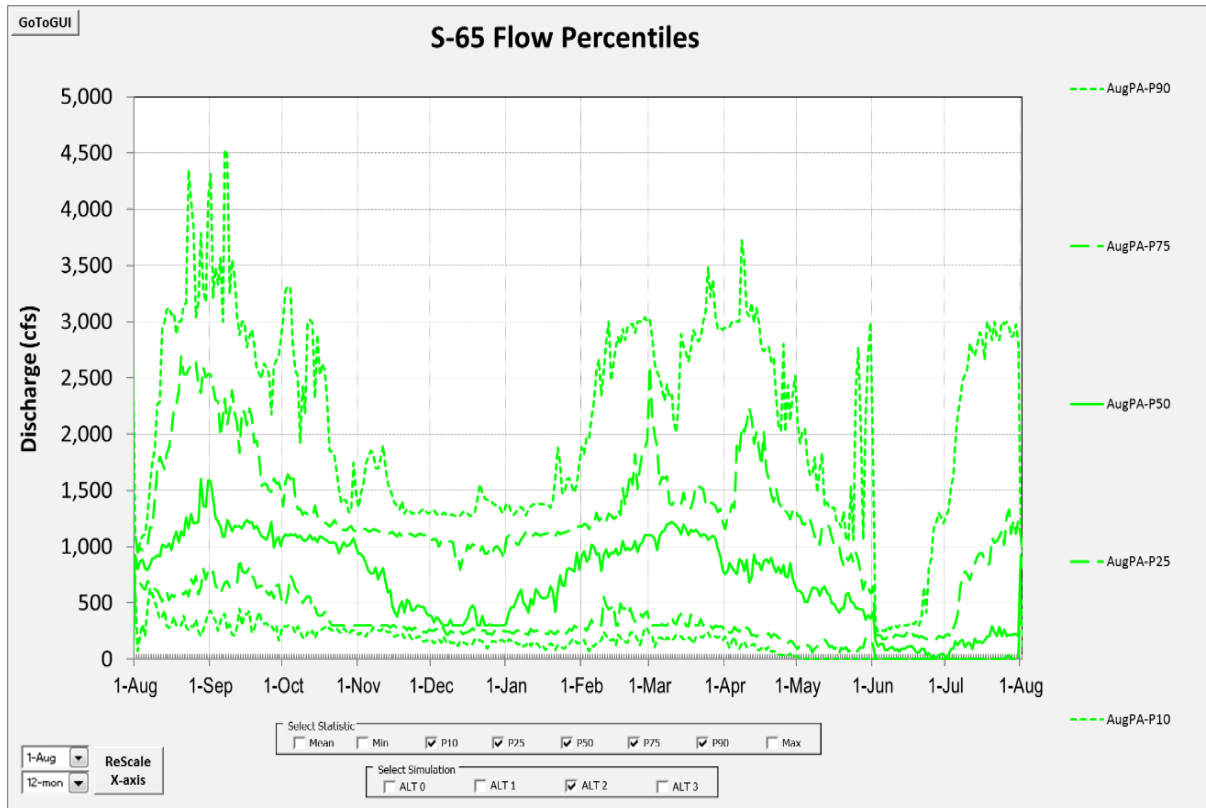


Figure 7-1. S-65 flow percentiles for the August 2019 position analysis.

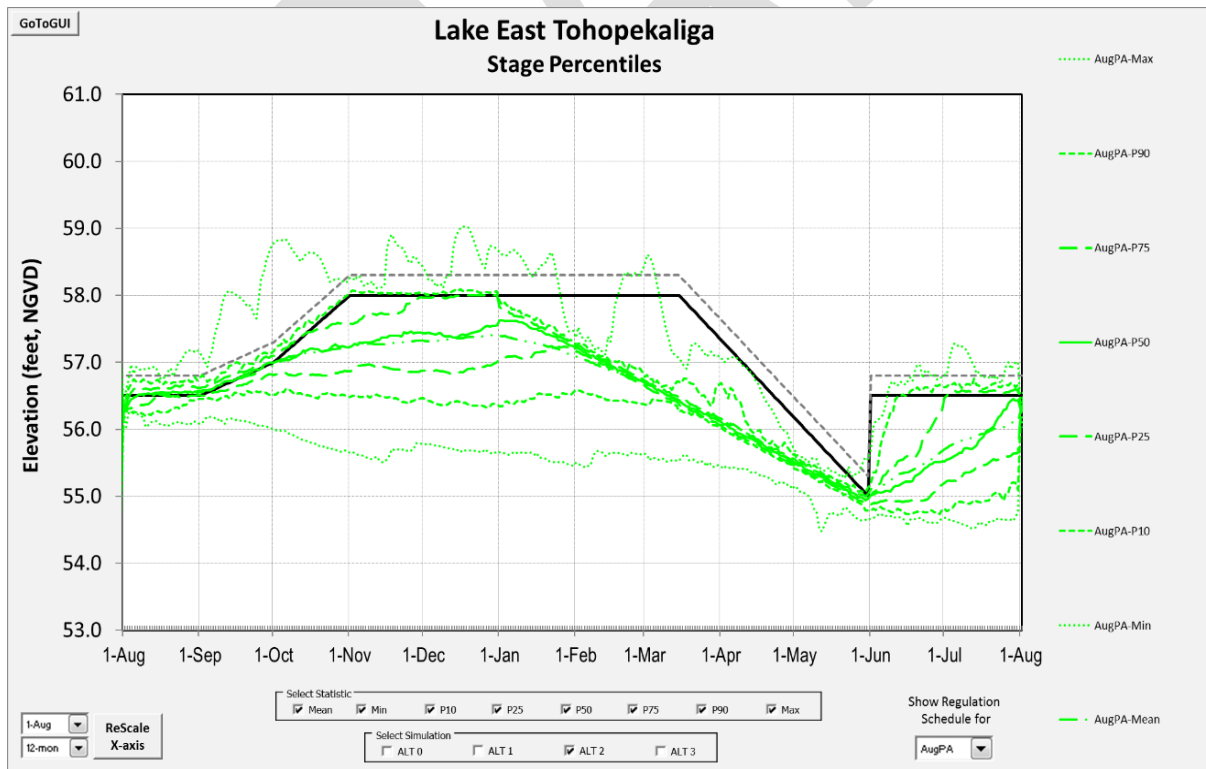


Figure 7-2. East Lake Tohopekaliga stage percentiles for the August 2019 position analysis.

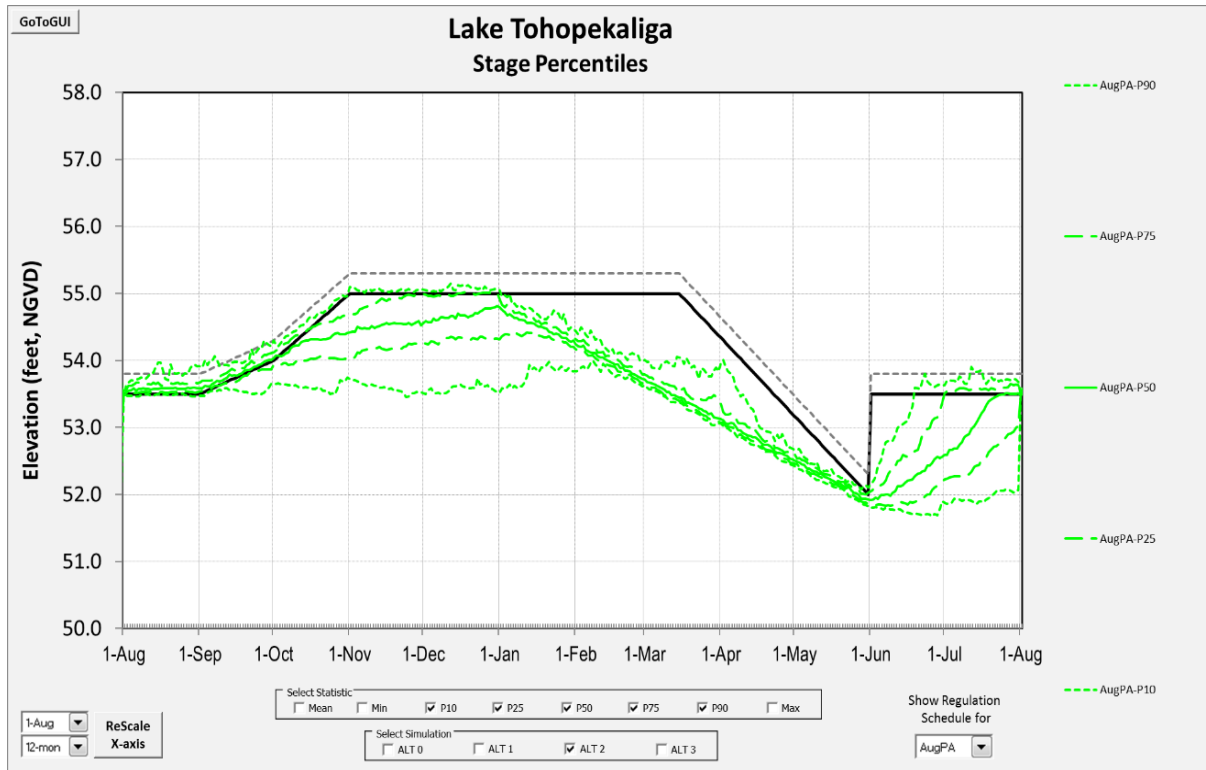


Figure 7-3. Lake Tohopekaliga stage percentiles for the August 2019 position analysis.

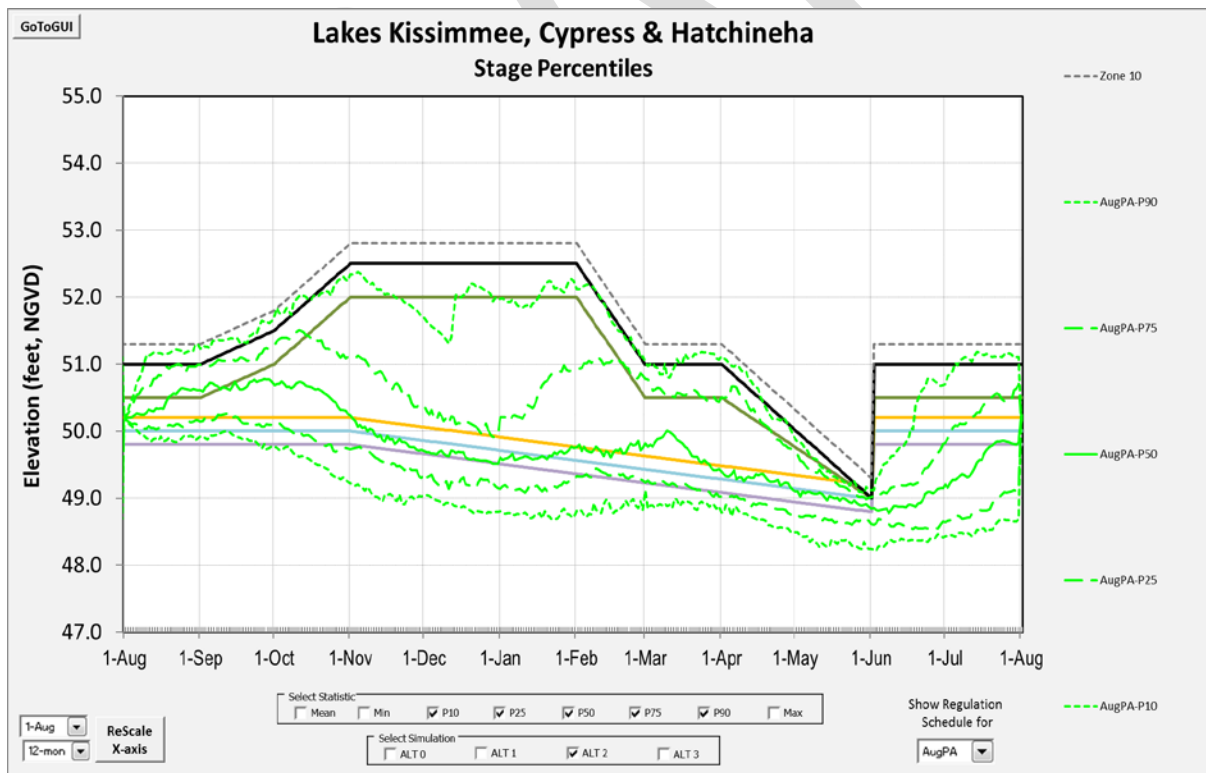


Figure 7-4. Lakes Kissimmee, Cypress, and Hatchineha stage percentiles for the August 2019 position analysis.

7.2 Sensitivity Analysis of Hypothetical Water Supply Withdrawals with Draft KRCOL Water Reservation Rule Criteria

This application of the UK-OPS Model investigated the effects of hypothetical water supply withdrawals from TOH with the draft KRCOL Water Reservation rule criteria. Water supply withdrawal reliability also was assessed with and without the proposed Lake Okeechobee constraint. Results of the sensitivity analysis are presented in this section, following a short summary of the components of the draft KRCOL Water Reservation rule criteria.

The draft KRCOL Water Reservation rules set WRLs in six of the lake systems in the UKB. **Figures 7-5 and 7-6** illustrate the WRLs for ETO and TOH, respectively. The red dashed line denotes the WRL, which was designed to protect the water needed for fish and wildlife of the lake system. The general concept is that water withdrawals can occur if the lake stage is above its respective WRL. However, there can be additional constraints on withdrawals. For example, if water withdrawals are considered for HMJ, then the stage in HMJ must exceed its WRL and the stage in ETO also may need to exceed its WRL. However, if Lake Okeechobee is not releasing water to the estuaries in order to manage the lake stage (i.e., regulatory discharges), then withdrawals from HMJ are restricted. If all the conditions are met, then withdrawals can occur on that day. The process repeats each day of the simulation.

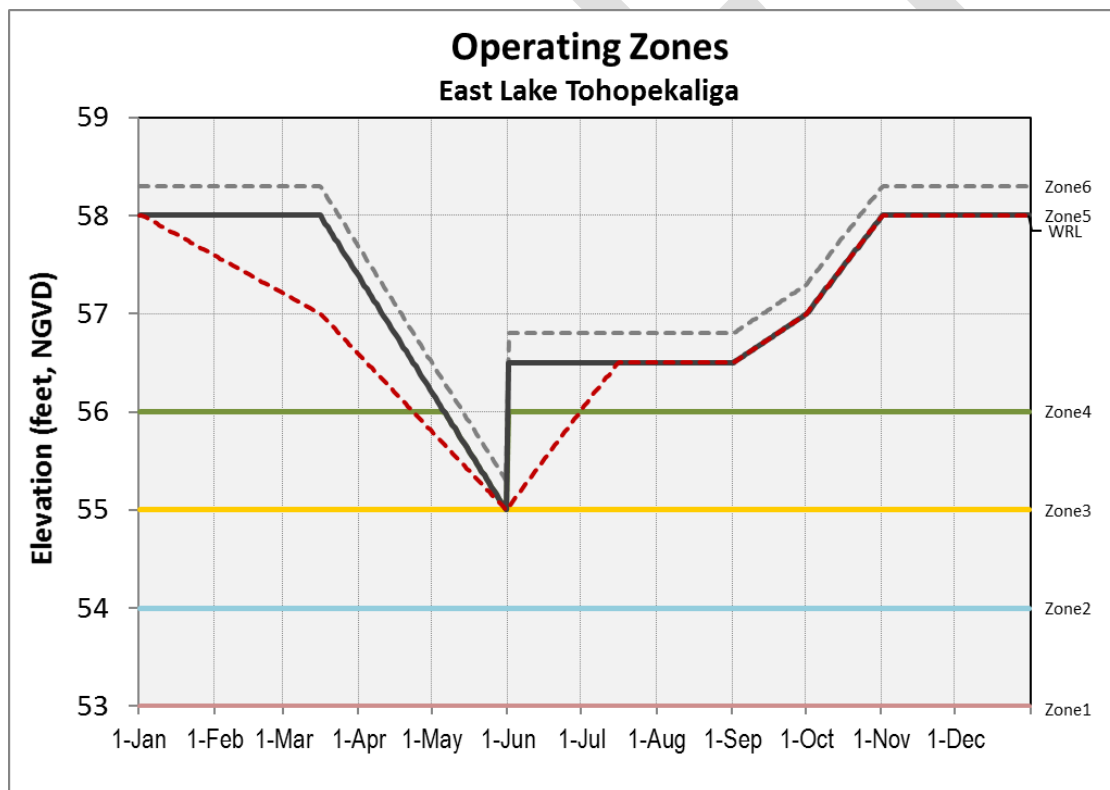


Figure 7-5. East Lake Tohopekaliga regulation schedule with proposed water reservation line (red dashed line).

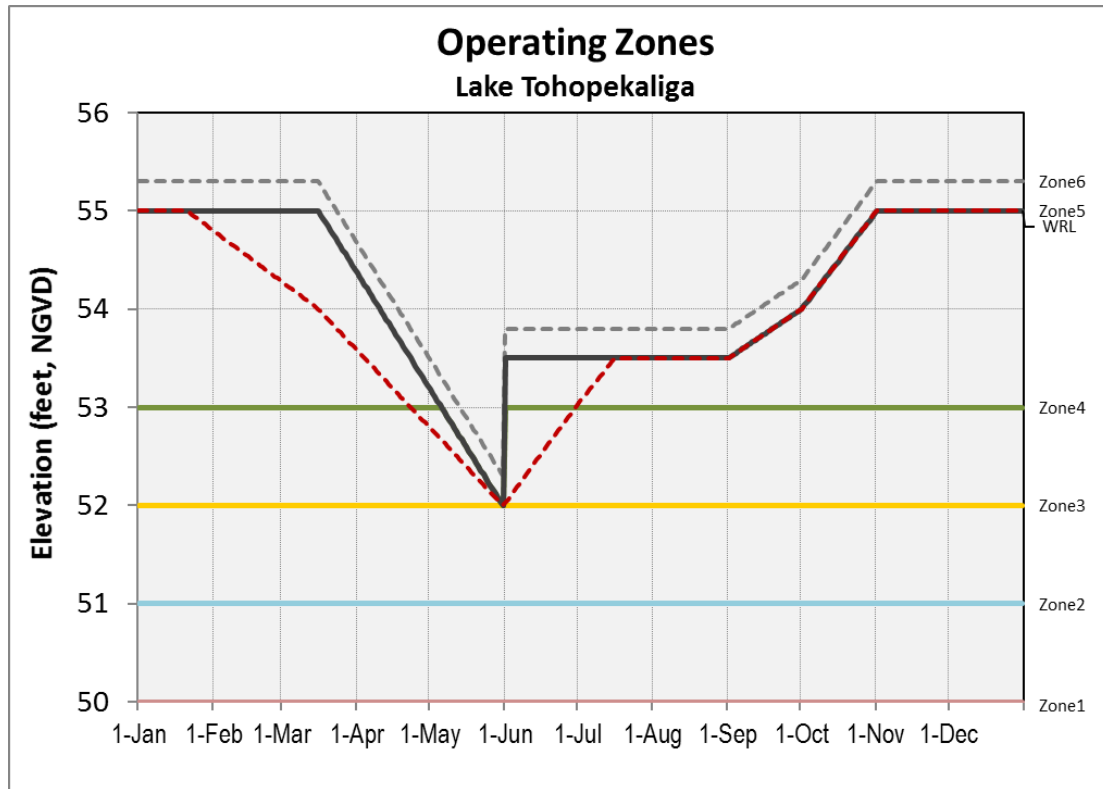


Figure 7-6. Lake Tohopekaliga regulation schedule with proposed water reservation line (red dashed line).

7.2.1 Baseline Scenario

The first scenario simulation (hereafter referred to as Base) was a baseline that used KCH Headwaters Regulation Schedule (Figure 3-10) and the standard regulation schedules for ETO and TOH (Figures 3-1 and 3-5, respectively; Figures 7-5 and 7-6, respectively). No water supply withdrawals were assumed.

7.2.2 Water Supply Withdrawal Scenario 1


Scenario 1, hereafter WSmax, used the same assumptions as Base but included water supply withdrawals from TOH. The capacity of the infrastructure needed to make the withdrawal was fixed at 64 million gallons per day (99 cfs), but the daily withdrawal rate was subject to the constraints of the draft KRCOL Water Reservation rules. No water supply withdrawals from the other lake systems were assumed in this hypothetical scenario.

7.2.3 Water Supply Withdrawal Scenario 2

Scenario 2, hereafter WSmaxL, was identical to the Scenario 1 except for the addition of the Lake Okeechobee constraint. The same baseline simulation (Base) was used for the relative comparison. Withdrawals from UKB lakes could reduce water availability downstream. The Lake Okeechobee constraint was designed to limit adverse impacts to permitted water users downstream of the UKB by limiting withdrawals from UKB lakes to when regulatory releases from Lake Okeechobee are being made to one or both of the coastal estuaries (Caloosahatchee River and/or St. Lucie Estuary).

The approximation of this constraint is depicted in **Figure 7-7**. The Lake Okeechobee hydrograph for a portion of the simulation of the 2008 Lake Okeechobee Regulation Schedule is colored green when the stage is above the Low Sub-band, indicating regulatory releases are being made to either the Caloosahatchee River or St. Lucie Estuary. The lake stage is colored red when the stage is below the Low Sub-band of the 2008 Lake Okeechobee Regulation Schedule, indicating relatively low water conditions with no regulatory releases being made to either the Caloosahatchee River or St. Lucie Estuary. When the lake stage is colored red, the Lake Okeechobee constraint is met, and no water supply withdrawals can be made from UKB lakes. When the stage is green, then water supply withdrawals can be made from UKB lakes.

Lake Okeechobee constraint limits withdrawals to occur only when Lake O regulatory releases are made to tide

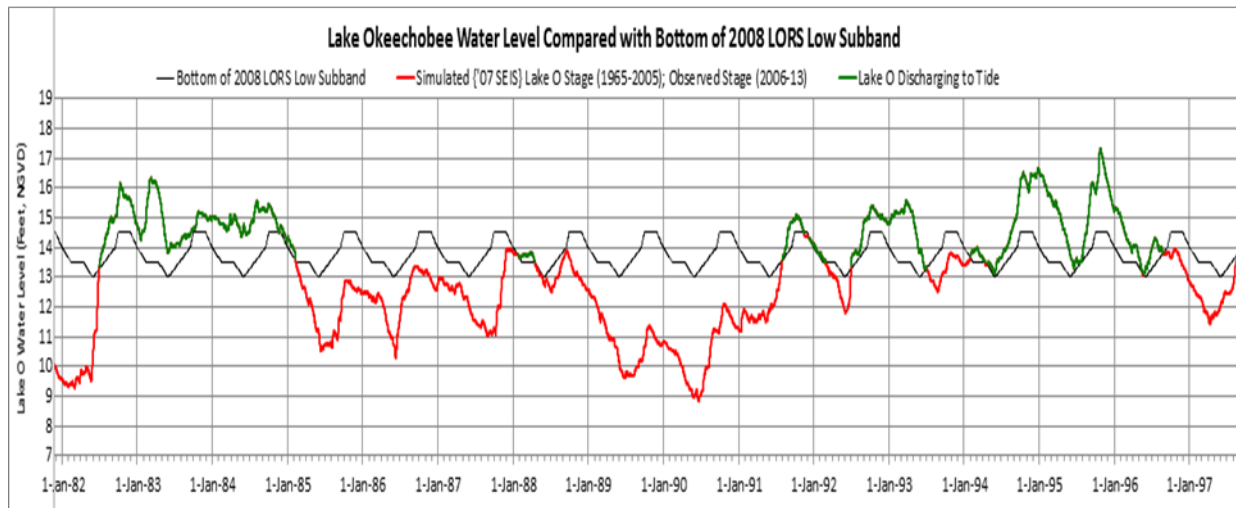

Green = stage above LORS Low Subband, Lake O regulatory discharges to tide,
WS from UK Lakes not limited by Lake O

Red = stage below LORS Low Subband, no Lake O regulatory discharges to tide,
NO WS from UK Lakes (59% of time)

Figure 7-7. Lake Okeechobee constraint used by the UK-OPS Model.

7.2.4 Simulation Results

The UK-OPS Model simulation of the Base, WSmax, and WSmaxL scenarios revealed the effects of one possible withdrawal scenario on the draft KRCOL Water Reservation rule criteria. The outputs examined and presented here are limited to comparisons of TOH water budgets, TOH stage percentiles, S-65 annual flow, and water supply reliability.

7.2.4.1 Lake Tohopekaliga Water Budget

Figure 7-8 shows the TOH annual water budget for the WSmax and WSmaxL simulations. The water supply withdrawal component is shown for each simulation year and is small relative to the other water budget components. Note that the WSmaxL scenario has less withdrawal volume. Annual average withdrawal decreases from 39,000 acre-feet/year for WSmax to 19,000 acre-feet/year for WSmaxL, a 51% reduction that is due to the Lake Okeechobee constraint, which significantly reduces the number of days withdrawals can be made.

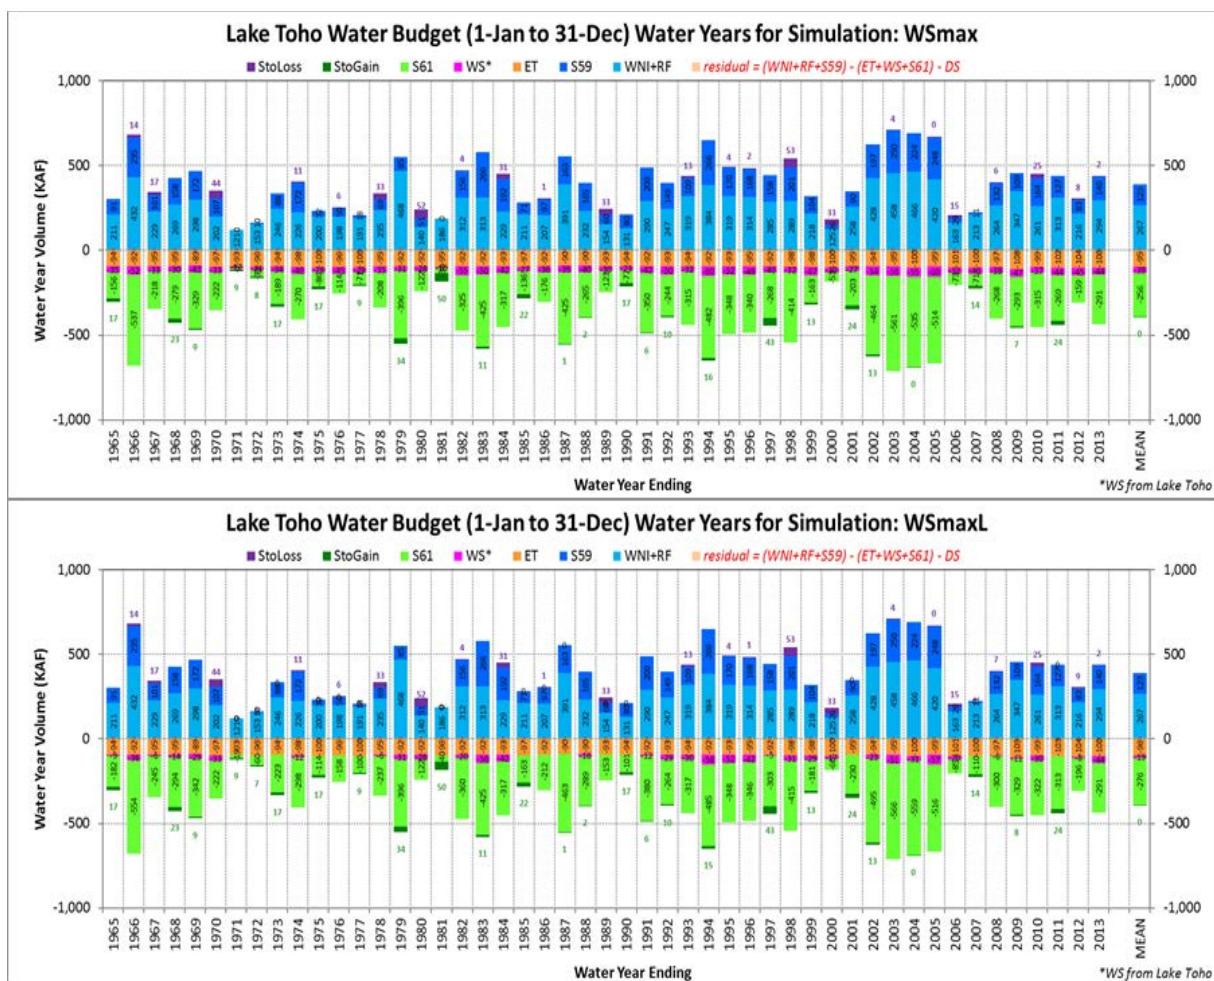


Figure 7-8. Water budget comparison of WSmax and WSmaxL for Lake Tohopekaliga.

7.2.4.2 Lake Tohopekaliga Stage Percentiles

Figure 7-9 compares the TOH stage percentiles for the three simulations (Base, WSmax, and WSmaxL). Results demonstrate a downward shift in the percentiles of the WSmax scenario (red) relative to the Base (black). The WSmaxL scenario (green) falls between the other simulations because the withdrawals are less than those of the WSmax simulation.

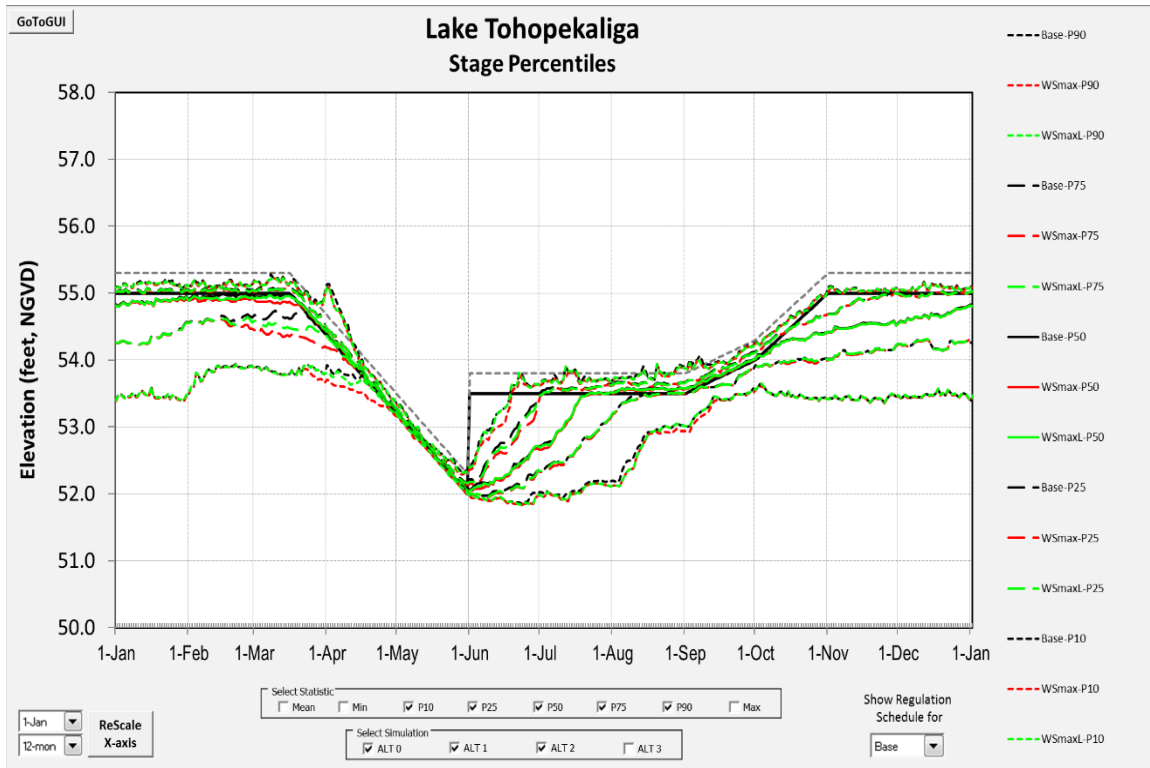


Figure 7-9. Lake Tohopekaliga stage percentiles for the Base, WSmax, and WSmaxL scenarios.

7.2.4.3 S-65 Annual Flow

A key criterion of the draft KRCOL Water Reservation rules is that the reduction in mean annual flow for the 41-year simulation period cannot exceed 5%¹. This is a permitting criterion to evaluate proposed withdrawals. This criterion cannot be used for real-time operations to determine whether withdrawals can or cannot occur.

Figure 7-10 shows the mean annual flow for the WSmax scenario is exactly -5.0%. In fact, the max withdrawal capacity of 64 million gallons per day was determined by iteratively running the model until this limit was reached. If all future water supply withdrawals were to come from TOH, then they could not exceed a total of 64 million gallons per day. In reality, permitted withdrawals will be in various amounts and from any of the six lake systems that allow withdrawals, subject to the WRL and downstream constraints. This is one reason why the UK-OPS Model is needed as regulatory tool: to evaluate each proposed individual withdrawal in the context of the cumulative withdrawals that already have been permitted. Once the 5% limit is reached, no further withdrawals will be permitted.

¹ The 5% threshold was established from prior technical work (SFWMD 2009). The UK-OPS Model was used to determine the reduction in the mean annual flow as a result of withdrawals from a water use permit issued to Toho Water Authority (49-02549-W). This permit resulted in a 0.9% reduction in mean annual flow at S-65, thereby reducing the 5% threshold to 4.1%, which is reflected in the draft Water Reservation rules.

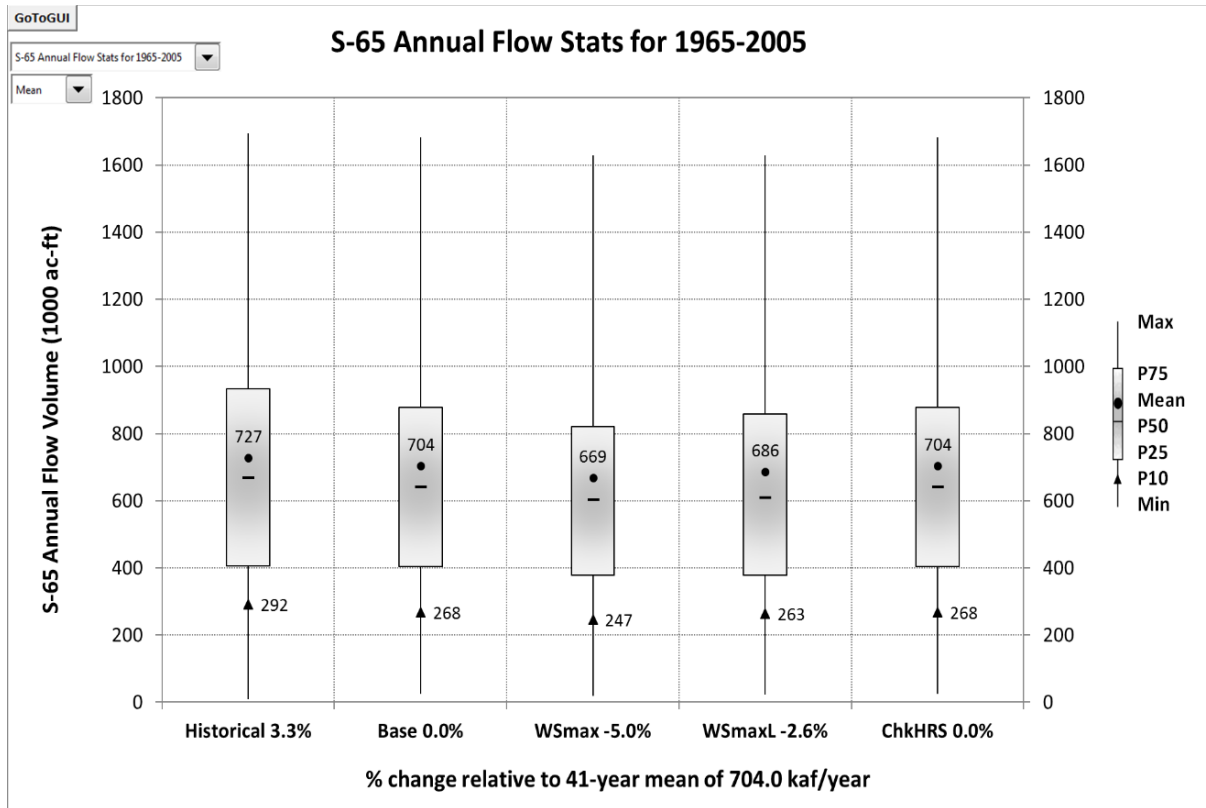


Figure 7-10. Mean annual flow at the S-65 structure under the WSmax scenario.

7.2.4.4 Water Supply Reliability

The simulated water supply reliability information for the WSmax and WSmaxL scenarios are shown in **Tables 7-1** and **7-2**, respectively. The target reliability (percent of time water supply withdrawals occur) was arbitrarily set at 70%. Users can change this target to match the level of performance desired for their particular project. The table summaries show the reliability under the WSmax scenario is 8 calendar years out of the 49 years simulated. The WSmaxL scenario has only 4 years out of the 49 years that meet or exceed the 70% reliability target. This result illustrates the impact from the Lake Okeechobee constraint. Additionally, a larger pump size can be tested to determine if supply targets can be better met. The reliability measures reflect the timing of withdrawals, but larger withdrawals could occur during the allowable days if they do not exceed the 5% cumulative limit. These scenarios can be tested with the UK-OPS Model.

4128 Table 7-1. Lake Tohopekaliga water supply reliability for the WSmax scenario.

Lake TOH Water Supply Reliability Table for WSmax																Percent of Time WS Withdrawal			
No. of Days per Month with Lake Toho WS Withdrawals at 99.0 cfs (64.0 MGD)													Days	Vol(kaf)	AvgMGD	CalYear	WetSeas	DrySeas	WatYear
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	May-Oct	Nov-Apr	May-Apr
1965	0	16	31	30	31	1	9	31	8	7	0	14	178	34.96	31.21	48.8%	47.3%		
1966	23	28	31	30	31	14	31	31	30	15	0	0	264	51.85	46.29	72.3%	82.6%	74.1%	58.4%
1967	0	16	31	30	31	0	8	31	20	1	0	0	168	33.00	29.46	46.0%	49.5%	50.9%	62.7%
1968	0	0	0	25	31	26	30	31	10	0	0	0	153	30.05	26.75	41.8%	69.6%	26.3%	31.7%
1969	19	28	31	30	31	0	0	0	6	27	21	22	215	42.23	37.70	58.9%	34.8%	65.6%	64.7%
1970	31	28	31	30	31	9	0	10	0	0	0	0	170	33.39	29.81	46.6%	27.2%	91.5%	62.2%
1971	0	0	3	28	31	0	0	0	0	0	0	0	62	12.18	10.87	17.0%	16.8%	29.2%	22.2%
1972	0	0	13	30	31	0	6	23	6	0	0	0	109	21.41	19.06	29.8%	35.9%	34.7%	20.2%
1973	0	26	31	30	31	3	0	13	29	11	0	0	174	34.18	30.51	47.7%	47.3%	55.7%	41.9%
1974	0	14	31	30	31	2	30	31	30	4	0	0	203	39.87	35.59	55.6%	69.6%	50.0%	44.4%
1975	0	0	21	30	31	0	0	27	19	11	2	0	141	27.70	24.72	38.6%	47.8%	38.7%	49.0%
1976	4	29	31	30	31	19	28	29	26	2	0	0	229	44.98	40.04	62.6%	73.4%	59.6%	50.3%
1977	5	28	31	30	31	1	0	5	13	2	0	3	149	29.27	26.13	40.8%	28.3%	59.0%	62.7%
1978	19	28	31	30	31	0	6	29	3	0	0	0	177	34.77	31.04	48.5%	37.5%	67.0%	44.7%
1979	4	28	31	30	31	1	0	0	27	7	0	0	159	31.23	27.88	43.6%	35.9%	58.5%	44.4%
1980	20	29	31	30	31	3	0	0	0	0	0	0	144	28.28	25.18	39.3%	18.5%	66.2%	48.1%
1981	0	0	0	0	11	4	0	3	21	0	0	13	52	10.21	9.12	14.2%	21.2%	5.2%	9.3%
1982	25	28	31	30	31	30	31	31	28	13	0	0	278	54.60	48.74	76.2%	89.1%	74.5%	45.5%
1983	7	28	31	30	31	13	20	31	28	13	7	15	254	49.89	44.54	69.6%	73.9%	59.9%	71.2%
1984	31	29	31	30	31	3	27	30	4	0	0	0	216	42.43	37.77	59.0%	51.6%	81.7%	76.2%
1985	0	0	9	30	31	0	0	30	27	10	0	0	137	26.91	24.02	37.5%	53.3%	33.0%	36.7%
1986	30	28	31	30	31	0	0	23	12	0	0	0	185	36.34	32.44	50.7%	35.9%	70.8%	59.5%
1987	29	28	31	30	31	2	0	0	0	0	19	29	199	39.09	34.89	54.5%	17.9%	70.3%	50.4%
1988	18	29	31	30	30	0	0	12	26	0	2	28	206	40.46	36.02	56.3%	37.0%	87.3%	51.6%
1989	11	11	29	30	31	0	0	18	17	6	0	0	153	30.05	26.83	41.9%	39.1%	67.0%	49.0%
1990	0	5	31	30	31	0	0	20	0	0	0	0	117	22.98	20.51	32.1%	27.7%	45.8%	37.8%
1991	0	2	29	30	31	30	31	31	13	16	0	0	213	41.84	37.35	58.4%	82.6%	43.4%	30.7%
1992	0	22	31	30	31	13	20	27	29	19	6	27	255	50.09	44.59	69.7%	75.5%	53.5%	64.2%
1993	29	28	31	30	31	5	0	0	10	0	0	0	164	32.21	28.76	44.9%	25.0%	85.8%	79.5%
1994	2	28	31	30	31	23	25	31	30	16	28	31	306	60.10	53.65	83.8%	84.8%	57.5%	37.5%
1995	30	28	31	30	31	0	5	31	27	28	13	10	264	51.85	46.29	72.3%	66.3%	98.6%	91.5%
1996	30	29	31	30	31	30	23	21	19	5	0	0	249	48.91	43.54	68.0%	70.1%	81.7%	72.4%
1997	7	28	31	30	31	4	12	29	5	0	1	28	206	40.46	36.12	56.4%	44.0%	59.9%	61.6%
1998	31	28	31	30	31	2	0	0	5	3	0	0	161	31.62	28.23	44.1%	22.3%	84.9%	63.0%
1999	0	26	31	30	31	1	13	27	14	30	26	12	241	47.34	42.26	66.0%	63.0%	55.7%	35.1%
2000	18	29	31	30	31	0	0	9	7	0	0	0	155	30.45	27.10	42.3%	25.5%	83.1%	71.6%
2001	0	0	0	26	31	3	16	27	30	5	0	0	138	27.11	24.20	37.8%	60.9%	26.9%	20.0%
2002	0	24	31	30	31	22	31	31	30	3	12	28	273	53.62	47.87	74.8%	80.4%	54.7%	54.0%
2003	31	28	31	30	31	25	31	31	21	8	2	16	285	55.98	49.97	78.1%	79.9%	90.1%	84.4%
2004	21	29	31	30	31	0	12	29	30	31	26	12	282	55.39	49.31	77.0%	72.3%	75.1%	75.4%
2005	30	28	31	30	31	30	29	31	9	7	27	21	304	59.71	53.30	83.3%	74.5%	88.7%	79.5%
2006	10	28	31	30	31	0	2	12	21	0	0	0	165	32.41	28.93	45.2%	35.9%	84.0%	77.8%
2007	0	26	31	30	31	20	21	20	14	8	0	1	202	39.68	35.42	55.3%	62.0%	55.7%	41.9%
2008	10	29	31	30	31	0	8	30	23	4	0	0	196	38.50	34.27	53.6%	52.2%	62.0%	58.7%
2009	0	19	31	30	31	30	31	31	25	1	0	11	240	47.14	42.08	65.8%	81.0%	52.4%	48.2%
2010	16	28	31	30	31	30	19	2	0	0	0	0	187	36.73	32.79	51.2%	44.6%	69.3%	72.6%
2011	0	20	31	30	31	0	9	31	25	26	20	3	226	44.39	39.63	61.9%	66.3%	52.8%	44.7%
2012	4	27	31	30	31	6	28	29	29	13	0	0	228	44.78	39.87	62.3%	73.9%	68.5%	64.8%
2013	0	14	31	30	31	25	31	31	28	3	0	0	224	44.00	39.28	61.4%	81.0%	50.0%	57.8%
MEANS																			
48YR	11	21	27	29	31	9	13	21	17	7	4	7	197	38.71	34.53	54.0%	52.9%	61.5%	54.0%
41YR	12	21	27	29	30	8	12	21	16	7	5	8	195	38.27	34.14	53.4%	51.1%	61.9%	53.4%

4131 Table 7-2. Lake Tohopekaliga water supply reliability for the WSmxL scenario.

Lake TOH Water Supply Reliability Table for WSmxL																Percent of Time WS Withdrawal			
	No. of Days per Month with Lake Toho WS Withdrawals at 99.0 cfs (64.0 MGD)												Days	Vol(kaf)	AvgMGD	CalYear	WetSeas	DrySeas	WatYear
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	May-Oct	Nov-Apr	May-Apr
1965	0	16	29	0	0	0	0	0	0	0	0	0	45	8.84	7.89	12.3%	0.0%		
1966	1	28	30	11	0	4	31	31	30	15	0	0	181	35.55	31.74	49.6%	60.3%	33.0%	19.2%
1967	0	16	15	0	0	0	0	0	0	0	0	0	31	6.09	5.44	8.5%	0.0%	14.6%	38.9%
1968	0	0	0	0	0	2	30	31	10	0	0	0	73	14.34	12.76	19.9%	39.7%	0.0%	0.0%
1969	0	0	22	26	22	0	0	0	6	27	21	22	146	28.68	25.60	40.0%	29.9%	33.0%	33.2%
1970	31	28	31	30	31	9	0	10	0	0	0	0	170	33.39	29.81	46.6%	27.2%	91.5%	59.7%
1971	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	13.7%
1972	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1973	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1974	0	0	0	0	0	0	0	29	30	4	0	0	63	12.37	11.05	17.3%	34.2%	0.0%	0.0%
1975	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	17.3%
1976	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1977	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1978	0	0	0	0	0	0	0	29	3	0	0	0	32	6.29	5.61	8.8%	17.4%	0.0%	0.0%
1979	4	28	31	30	31	1	0	0	27	7	0	0	159	31.23	27.88	43.6%	35.9%	58.5%	34.2%
1980	20	29	31	30	31	3	0	0	0	0	0	0	144	28.28	25.18	39.3%	18.5%	66.2%	48.1%
1981	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	9.3%
1982	0	0	0	0	0	1	31	31	28	13	0	0	104	20.43	18.24	28.5%	56.5%	0.0%	0.0%
1983	7	28	31	30	31	13	20	31	28	13	7	15	254	49.89	44.54	69.6%	73.9%	59.9%	54.8%
1984	31	29	31	30	31	3	27	30	4	0	0	0	216	42.43	37.77	59.0%	51.6%	81.7%	76.2%
1985	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	26.0%
1986	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1987	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1988	5	28	31	16	0	0	0	0	0	0	0	0	80	15.71	13.99	21.9%	0.0%	37.6%	21.9%
1989	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1990	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
1991	0	0	0	0	0	0	0	30	13	16	0	0	59	11.59	10.35	16.2%	32.1%	0.0%	0.0%
1992	0	20	0	0	0	0	22	27	29	19	6	27	150	29.46	26.23	41.0%	52.7%	9.4%	21.6%
1993	29	28	31	30	31	5	0	0	0	0	0	0	154	30.25	27.00	42.2%	19.6%	85.8%	67.9%
1994	1	28	31	20	31	23	25	31	30	16	28	31	295	57.94	51.73	80.8%	84.8%	52.4%	31.8%
1995	30	28	31	30	31	0	5	31	27	28	13	10	264	51.85	46.29	72.3%	66.3%	98.6%	91.5%
1996	30	29	31	30	24	30	23	16	0	0	0	0	213	41.84	37.25	58.2%	50.5%	78.4%	72.4%
1997	0	0	0	0	0	0	0	0	2	0	0	21	23	4.52	4.03	6.3%	1.1%	0.0%	25.5%
1998	31	28	31	30	31	2	0	0	1	4	0	0	158	31.03	27.70	43.3%	20.7%	81.1%	39.2%
1999	0	26	26	0	0	0	8	7	14	30	26	12	149	29.27	26.13	40.8%	32.1%	24.5%	24.7%
2000	18	29	31	10	0	0	0	0	0	0	0	0	88	17.28	15.39	24.0%	0.0%	59.2%	50.5%
2001	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	0.0%
2002	0	25	2	0	0	0	7	31	30	3	0	21	119	23.37	20.87	32.6%	38.6%	12.7%	7.4%
2003	31	28	31	22	12	27	31	31	21	8	2	16	260	51.07	45.59	71.2%	70.7%	68.4%	55.9%
2004	21	29	23	0	0	0	0	0	16	31	26	12	158	31.03	27.63	43.2%	25.5%	42.7%	60.4%
2005	30	25	31	30	22	30	29	31	9	7	27	21	292	57.35	51.20	80.0%	69.6%	83.0%	55.1%
2006	10	28	31	30	4	0	0	0	0	0	0	0	103	20.23	18.06	28.2%	2.2%	71.2%	75.3%
2007	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	1.1%
2008	0	0	0	0	0	0	0	4	23	4	0	0	31	6.09	5.42	8.5%	16.8%	0.0%	0.0%
2009	0	0	0	0	0	0	0	31	25	1	0	0	57	11.20	9.99	15.6%	31.0%	0.0%	8.5%
2010	0	11	31	30	31	30	19	2	0	0	0	0	154	30.25	27.00	42.2%	44.6%	48.6%	35.3%
2011	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	0.0%	0.0%	0.0%	22.5%
2012	0	0	0	0	0	0	0	0	29	13	0	0	42	8.25	7.34	11.5%	22.8%	0.0%	0.0%
2013	0	14	31	30	31	25	31	31	28	3	0	0	224	44.00	39.28	61.4%	81.0%	50.0%	32.1%
MEANS																			
48YR	7	12	14	10	9	4	7	11	9	5	3	4	96	18.80	16.77	26.2%	24.6%	27.9%	26.2%
41YR	8	13	14	10	9	4	7	11	9	6	4	5	100	19.55	17.44	27.3%	24.6%	29.7%	27.3%

8 SUMMARY AND RECOMMENDATIONS

This section summarizes the strengths and limitations of the UK-OPS Model and suggests future enhancements to improve model accuracy and utility. The UK-OPS Model uses a simple water balance approach to simulate water levels and discharges for the primary hydrologic components of the larger lake systems in the UKB. The model was developed to quickly test alternative operating strategies for KCH, TOH, and ETO specifically. It was later modified to serve as a water use permit evaluation tool to assess the effects of proposed water supply withdrawals, subject to the draft KRCOL Water Reservation rule criteria. Original model development was done expeditiously; user-friendly interfaces and documentation beyond comments within the worksheets were not included in the initial development effort. The need to document and peer review the UK-OPS Model arose during the planning phase of the draft KRCOL Water Reservation rules.

This report describes the purpose, utility, and technical details of the UK-OPS Model. The report is not a users' guide, but it is prerequisite reading for analysts who want to use the model. Included in this report are details on model structure, inputs and outputs, and model validation. Two applications of the UK-OPS Model were described in this report: 1) seasonal operations planning, including the SFWMD's monthly position analysis; and 2) testing the effects of hypothetical surface water withdrawals on the draft KRCOL Water Reservation rule criteria. These applications illustrate appropriate uses of the UK-OPS Model.

Strengths of the UK-OPS Model include the ability to rapidly test alternative operating ideas (i.e., run time of 4 minutes versus days or even weeks for more detailed models), ease of use in a readily available environment (i.e., Microsoft Excel®), broad range of options for specifying alternative operations, immediate updating of the outputs and performance metrics, and flexibility to modify the Microsoft Excel® worksheets to add additional features and/or performance summary graphics.

Model users have made the following comments regarding the usefulness of the UK-OPS Model:

- Key strengths of the UK-OPS Model are its quick simulation time and ability to immediately visualize outputs.
- Time-series plots provide a useful way to visualize and confirm the input operations are being correctly simulated.
- Water budgets are a helpful way to quickly confirm mass is conserved.
- The S-65 mean annual discharge and water supply reliability summaries enable rapid assessment of the effects of proposed water supply withdrawals on the draft KRCOL Water Reservation rule criteria.

Limitations of the UK-OPS Model include the potential need for routing computations for the small lakes, lack of extensive documentation within the workbook, and dependence on another model or historical data to generate the boundary inflows.

There are several areas where the UK-OPS Model may be exploited by more users with varying levels of expertise in water management, hydrology, and hydraulics. Some initial recommendations are listed below, and additional recommendations are expected based on input from internal and external peer reviewers.

1. Extend the simulation period by updating the inputs using available historical data and/or outputs from detailed regional hydrologic models.
2. Simplify the effort required to perform simulation period extensions by leveraging additional Microsoft Excel® features (e.g., making range names more dynamic).

- 4175 3. Improve the GUI of the UK-OPS Model to appeal to more users and enable better utility of the
4176 model.
- 4177 4. Expand the instructions for users within the model. Online documentation and built-in tutorials
4178 would greatly enhance usability of the model.

4179 LITERATURE CITED

- 4180 AECOM. 2010. *KB Modeling and Operations Study, Final KBMOS Daily Planning Tool Testing Plan,*
4181 *AFET-LT and AFET FLOOD Concurrent Calibration Process and Criteria.* Prepared for South
4182 Florida Water Management District, West Palm Beach, FL.
- 4183 Fan, A. 1986. *A Routing Model for the Upper Kissimmee Chain of Lakes.* SFWMD TP86-5. South Florida
4184 Water Management District, West Palm Beach, FL.
- 4185 Hirsch, R.M. 1978. *Risk Analysis for a Water-Supply System – Occoquan Reservoir, Fairfax and Prince*
4186 *William counties, Virginia.* Hydrologic Science Bulletin 23(4):476-505.
- 4187 SFWMD. 2005. *Documentation of the South Florida Water Management Model Version 5.5.* South Florida
4188 Water Management District, West Palm Beach, FL. November 2005. 325 pp.
- 4189 SFWMD. 2009. *Alternative Formulation Evaluation Tool (AFET) Model Documentation/Calibration*
4190 *Report for the Kissimmee Basin Modeling and Operations Study (KBMOS).* Prepared by AECOM
4191 and DHI for the South Florida Water Management District, West Palm Beach, FL.
- 4192 SFWMD. 2017. *Kissimmee Basin H&H Models Report.* Hydrology and Hydraulics Bureau, South Florida
4193 Water Management District, West Palm Beach, FL. December 2017.
- 4194 USACE. 1996. *Integrated Project Modification Report and Supplement to the Final Environmental Impact*
4195 *Statement.* United States Army Corps of Engineers, Jacksonville District, Jacksonville, FL.
4196 January 1996.
- 4197 USACE. 2019. *East Lake Tohopekaliga Drawdown and Habitat Enhancement – Final Environmental*
4198 *Impact Statement.* Prepared by South Florida Engineering and Consulting LLC, West Palm Beach,
4199 FL. Prepared for United States Army Corps of Engineers, Jacksonville District, Cocoa Permit
4200 Section, Cocoa, FL. July 2019.
- 4201 VanZee, R. 2011. *Regional Simulation Model – Basins (RSMBN) Documentation and User Manual.*
4202 Hydrologic and Environmental Systems Modeling. South Florida Water Management District,
4203 West Palm Beach, FL. March 28, 2011. 61 pp.

ATTACHMENT

**SAMPLE EMAIL COMMUNICATION OF AUGUST 2019
UK-OPS POSITION ANALYSIS**

DRAFT

From: Neidrauer, Calvin
Sent: Thursday, August 01, 2019 5:42 PM
To: Morancy, Danielle <dmorancy@sfwmd.gov>
Cc: Wilcox, Walter <wwilcox@sfwmd.gov>; Barnes, Jenifer <jabarne@sfwmd.gov>; Bousquin, Steve <sbousqu@sfwmd.gov>; Glenn, Lawrence <lglenn@sfwmd.gov>; Kirkland, Suelynn <skirklan@sfwmd.gov>; Anderson, H. David <dander@sfwmd.gov>; Mohottige, Dillan <dmohotti@sfwmd.gov>; Godin, Jason <jgodin@sfwmd.gov>
Subject: August PA UK-OPS Simulation Assumptions

FYI:

The UK-OPS Model simulation for the August PA was completed today (01-August). Operations assumptions for Lake KCH changed from the June PA, and were informed by the 2019 wet season discharge plan developed by the SFWMD with input from the USFWS & FFWCC. Assumptions for TOH & ETO were consistent with last month; the spring fish & wildlife (F&W) recessions are assumed to start on 15-Jan-2019 at 0.4 feet below the regulation schedules.

Results are to be used as input to the corresponding SFWMM simulation. A copy of the Excel workbook is available in the following server folder:

\\ad.sfwmd.gov\dfsroot\data\hesm_pa\PA_BASE_DIR\PA\UK-OPSmodel\

Filename = UK-OPS(v3.12)_2019AugPA.xlsm

Use the **ALT2** simulation output (Run name = **AugPA**).

The simulated stages and flows are in the **ALT2 worksheet tab**.

Initial (31-July) Conditions:

E. Lake Toho: 56.29 feet, NGVD (TOHOEE+)



Lake Toho: 53.48 feet, NGVD (LTOHOW AVG)


Lake KCH: 50.20 feet, NGVD (LKISS AVG)

For the August 2019 Position Analysis the Upper Kissimmee Operations Screening (UK-OPS) Model was used to simulate water levels and releases from Lakes Kissimmee-Cypress-Hatchineha, Tohopekaliga, and East Lake Tohopekaliga. The UK-OPS Model assumptions for operations are listed below. Details regarding model version features are listed at the end of this e-mail.


UK-OPS Model assumptions for the August-2019 PA:

1. Hydrology (lake inflows) based on historical/observed stage and flow data from DBHYDRO (same assumption since Jan 2016).
2. Regulation of Lakes Toho and East Lake Toho according to the standard Regulation Schedules with spring recession operations approximated as shown below. Recession ops start 15-Jan. Note the red dotted lines represent the standard regulation schedule Zone A line.
3. Regulation of Lakes Kissimmee, Cypress and Hatch according to 2019 wet season operations designed to achieve desired river flows and lake stage recession rates. See graphic of discharge plan below. Rate of change limits for S-65A flows shown below were set in May 2019. The rate of change limits apply for stages below Zone A of the KCH schedule.
4. Starting with the Nov-2017 PA, KCH simulated outflows were measured at S-65A. So S-65 releases are made with consideration of Pool A runoff contribution to S-65A.

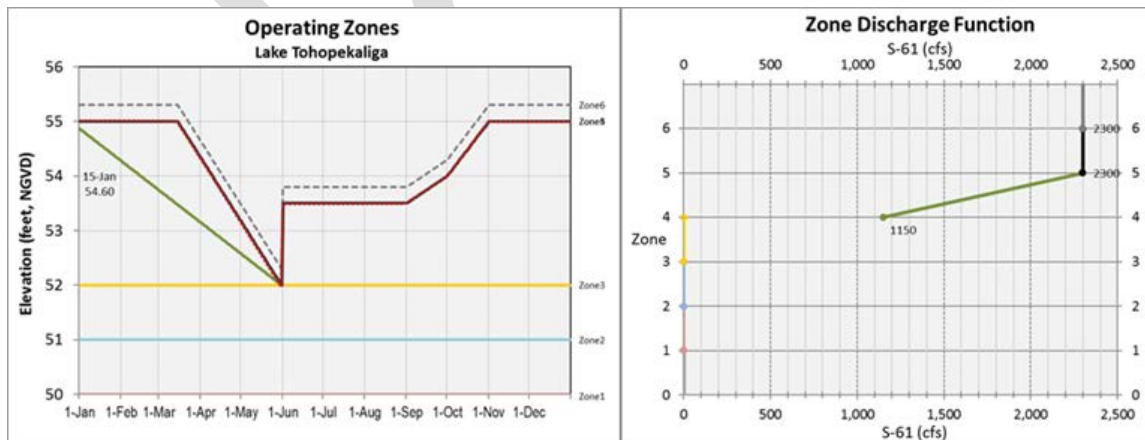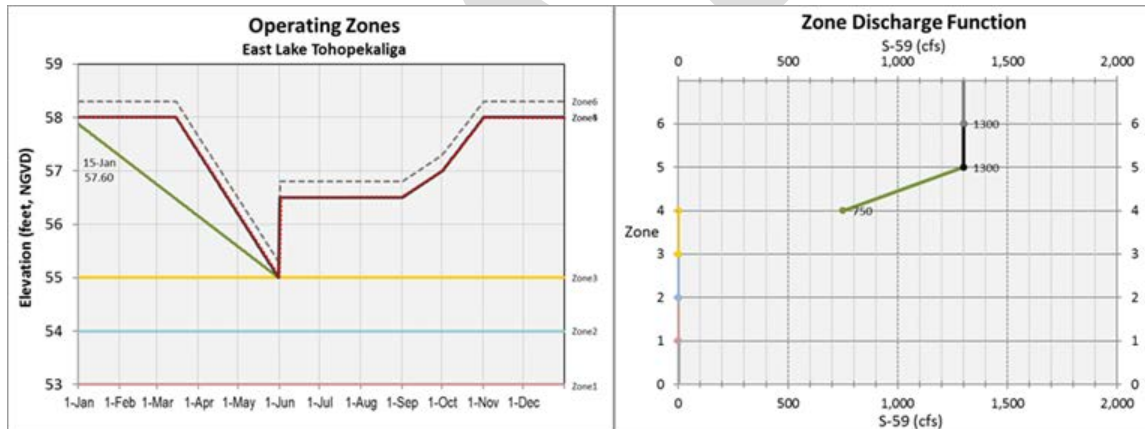

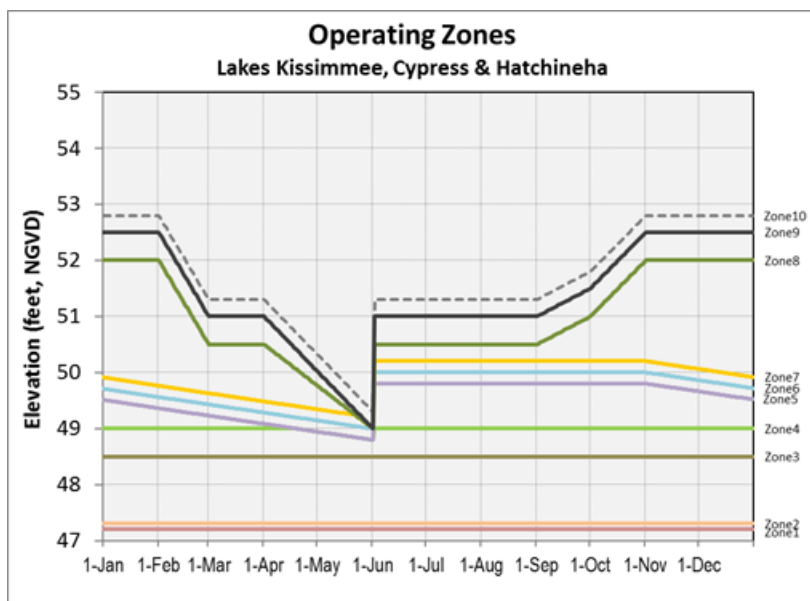

4262

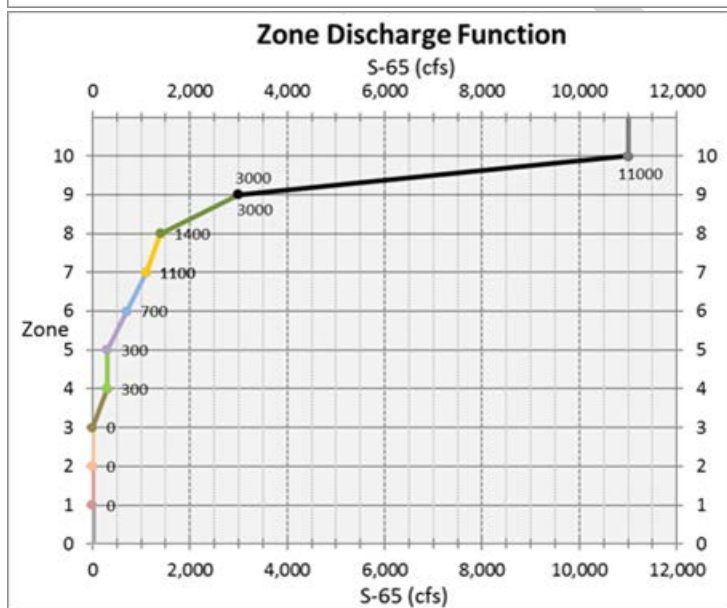

4263

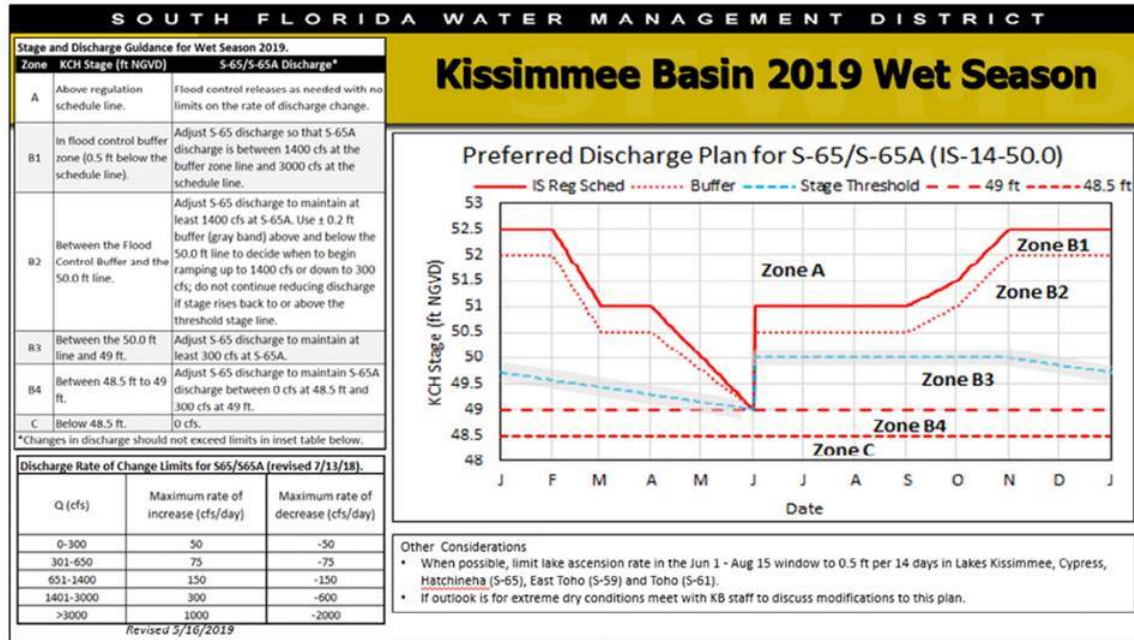


Figure 11. The 2019 Wet Season Discharge Plan for S-65/S-65A.

UK-OPS Model Version notes:

The November, 2015 investigation of the UKISS Model output (2007 version) indicated a significant underestimation of S-65 flows for the 1997-98 very wet period. So while SFWMD H&H Bureau staff efforts continue toward improving the modeling tools for the Kissimmee basins, the intermediate solution is to continue to use the UK-OPS Model with the lateral lake inflows computed using observed data.

Version 3.12 of the UK-OPS Model was used beginning with the July 2019 PA. V3.12 includes features to allow testing alternative operations and water reservation lines. These features are not used for the current PA simulations.

Version 3.10 of the UK-OPS Model was used beginning with the January 2019 PA. Version 3.10 includes options to simulate lake stage recession operations for lakes KCH, TOH, and ETO. The new logic determines daily releases necessary to achieve a user-specified stage recession rate. Options for KCH include constraining the S-65 release rates-of-change by the user-specified release rate limits. See the Notes page and comments in the routing worksheets for more detail. These changes are not used for current PA simulations.

Version 3.07 of the UK-OPS Model was used beginning with the March 2018 PA. Version 3.07 includes new features to enable testing alternative strategies for the Kissimmee Reservation, particularly a water reservation line for Lakes KCH (to limit upstream withdrawals). Other changes include separation of the WRL zone specification from the regulation schedules. See the Notes tab for further detail. These changes do not affect the position analysis simulations.

4285 Version 3.05 of the UK-OPS Model was used beginning with the March 2017 PA. Version 3.05
4286 includes additional capability to view individual year stage and discharge hydrographs for the
4287 three primary lake systems (KCH, TOH, and ETO). Use the buttons in the 5th column of the PM
4288 & Indicator buttons to access the new hydrographs. Thanks to Naiming Wang for this addition
4289 to the model.

4290

4291 *Cal*

4292 Calvin J. Neidrauer, P.E.
4293 Chief Engineer
4294 Hydraulics and Hydrology Bureau, Modeling Section
4295 South Florida Water Management District
4296 West Palm Beach, Florida
4297 Office: (561) 682-6506
4298 Email: cal@sfwmd.gov

4299

4300

4301

4302

APPENDIX D: PEER-REVIEW REPORTS FOR THE UK-OPS MODEL

DRAFT

SFWMD UK-OPS Model Report

By Mark H. Houck

November 11, 2019

Overview:

SFWMD requested an external scientific peer review of the UK-OPS model and documentation in late Sep 2019. After a preliminary examination of the model and the documentation, written comments were submitted to SFWMD on Oct 14, 2019, with a revision on Oct 15, 2019. SFWMD held a day-long workshop/teleconference on Oct 23, 2019, to provide a live overview of the model, demonstrate its use, and address all comments and questions from the peer reviewers and the public.

The next step is submission of a final report from the peer reviewers. This document is that final report. It comprises two sections. The first is organized in response to five questions posed by the SFWMD. The second contains several recommendations for enhancing the UK-OPS model and documentation.

Section 1: Five SFWMD Questions

Question 1: Is the water budget approach technically sound for its intended purpose, which is to enable simulation of alternative release strategies and potential water supply withdrawals?

The UK-OPS model is designed as a coarse, or screening, simulation model to allow a variety of release strategies or policies to be assessed quickly. The approach is technically sound, and satisfies the standards of practice. It is an appropriate tool to assess alternative release strategies and potential water supply withdrawals at a coarse level.

The model may be used in two different modes. Long-term simulations (49 years of daily operations) may be made to consider long-term operating policies. Or the model can be run to consider shorter-term decisions which the developers call “position analysis”. In this case, the current conditions of the system are used as initial conditions for 49 one-year simulations where each one-year simulation assumes one of the 49 historical year’s flows as input. Both modes are valuable to address a variety of operating decisions in the long-term and short-term.

The model is similar in principle to other state-of-the-practice water resource screening models or modeling systems that are used to assess operating strategies or policies. The implementation of the principles is well executed, thorough, and has resulted in a useful tool for assessing options in the Kissimmee Basin region of the SFWMD.

The model's use is limited by several assumptions made by the developers. The documentation identifies these limitations but at present the model should be exercised only by professionals who are familiar with the model's development, limitations, and use. Further discussion of these assumptions and limitations is provided in section two.

Question 2: Is the water budget approach applied correctly for the three large lake systems that use the hydrologic routing computations, namely Lakes KCH, Tohopekaliga, and East Tohopekaliga?

The water budget approach is correctly applied to the three large lake systems in the UK-OPS screening model. The simplification of the hydraulics of the system is reasonable and useful in establishing a screening model for testing of various operating policies.

The simplification of the other inputs to the lakes (i.e. the WNI+RF terms) is reasonable in this screening model. However, the greater the variance of tested operations is from historical operations, the greater the opportunity for errors to occur. More details on this issue are provided in section 2.

Question 3: Does the draft technical documentation adequately describe the model's fundamental features, basic capabilities and limitations, and the algorithms used to simulate lake releases and water levels? Are there any specific suggestions to improve the description of the model?

The draft technical documentation does adequately describe the model principles. It is not intended to be a users' manual and it does not serve that purpose. It does describe the basic approach to constructing the model, the justification for this approach, its principle components, the potential uses of the model, and two examples illustrating those uses.

All technical documents have the potential for improvement. Several suggestions for improving this one are provided in section 2.

Question 4: Is the model suitable for simulating alternative operating criteria for East Lake Tohopekaliga, Lake Tohopekaliga, and Lakes Kissimmee, Cypress, and Hatchineha?

Based on the review of the documentation and spreadsheet model, and participation in the one-day workshop, the model is suitable for assessing alternative operating policies for the three large lakes. Appropriate use of the UK-OPS model in its current form requires a trained expert, but those individuals may use the model reasonably to examine alternative operating policies and criteria for the three large lakes.

Question 5: Is the model suitable for evaluating: (1) individual and cumulative water supply withdrawals, (2) the associated Kissimmee Basin Water Reservation criteria

limitations on those withdrawals, and (3) the effects of water supply withdrawals on the 5% maximum reduction criteria at S65?

The UK-OPS screening model is designed to support assessment of these three specific operations, as well as others. The model meets state-of-the-practice standards, is based on reasonable assumptions, uses appropriate data sets, and is implemented in an Excel spreadsheet thereby making the model potentially accessible to an array of users. All models must be exercised with care, considering the embedded assumptions. Therefore, the UK-OPS model in its present form requires use by a trained expert familiar with the model, its capabilities, and its limitations.

Section 2: Comments on the UK-OPS Screening Model and Documentation

1. Implementation

- a. The UK-OPS model is a coarse simulation model. It is intended as a tool that may quickly assess a variety of alternative operating strategies or policies. The complexity of the programming in the spreadsheet is notable, and the complex model is remarkably computationally efficient.
- b. The development of a screening simulation model in Excel makes the tool potentially accessible to an array of users. Because Excel is so widely used and understood, it allows for the relatively easy examination of model's components and structure, and it may support well the evolution of the model in the future.
- c. UK-OPS supports continuous simulation over a 49-year historical sequence; or position analysis where 49 one-year simulations based on historical conditions are run, all with a starting point of current basin conditions. This provides reasonable flexibility and the opportunity to address a variety of questions ranging from long-range policy changes (using continuous simulation) to short-term operations-planning (using position analysis). These options are important and in line with standards of practice.
- d. The documentation report is appropriately described as an overview and not a detailed users' manual. The documentation report is well-written, thorough, and useful for understanding the UK-OPS model and its application. However, the model currently requires a trained expert to use the model appropriately so that its assumptions, strengths, and limitations are fully incorporated in any assessment.

2. Recommendations / Limitations / Enhancements

a. UK-OPS Model – the spreadsheet

- i. The UK-OPS model was developed as a screening or coarse model that can be employed quickly to get high-level guidance on the impacts of various policy or operating alternatives. This is reasonable and standard practice. The issue is under what conditions is the screening or coarse model reliable/reasonable/acceptable?
- ii. The model uses a daily time step with historical inflows as inputs. This is reasonable, and the practice is common, but it assumes stationarity of

the flows when assessing future operations. Land use changes, changes to the flow network, or climate change during the last 60 years may have resulted in the historical flows being non-stationary. Therefore, it may be useful to test the assumption of stationarity to refine the model and enhance confidence in its use to assess future operations. Common approaches to assess stationarity include:

1. Data visualization. This typically means plotting the time series, looking at the plots, and visually attempting to discern any obvious trends.
2. Statistics visualization. Sometimes seeing trends (the signal versus the noise) in a time series is easier if statistics are plotted instead of the raw data. For example, a plot of an annual or multi-year moving average of the data, or a plot of the autocorrelation factor for different lags may make it possible to see the trends (signal) more easily.
3. Statistical tests. Finally, there is a rich literature on more elaborate statistical tests for stationarity (e.g. Dickey Fuller test or the Kwiatkowski-Phillips-Schmidt-Shin—KPSS test). These are quite common and may be used if warranted.

- iii. The model uses a 49-year historical record (1965 – 2013) of daily flows as the basis for simulation. Obviously, additional historical data are available for more recent years (2013 – present). While there are only a few extra years of data available, they may be important for the modeling effort. They may contain critical events or they may reflect the current hydrologic regime which may differ from earlier hydrologic data if the system is non-stationary. In conjunction with a study of the stationarity of the historical data, a plan to incorporate additional, recent hydrologic data would be appropriate.
- iv. The hydrology and hydraulics of this complex system have been simplified with the goal of developing a screening model that adequately represents the hydrologic and hydraulic processes and allows rapid testing of a variety of operating strategies. These simplifications are reasonable under current conditions, and the model is appropriate to screen alternative strategies quickly.
- v. There are some concerns that should be considered as model use increases and the range of operation policies assessed expands. For example, the modeling of structures S59 and S61 assumes that the maximum allowable gate openings (MAGO) and maximum permissible heads (MPH) are not considered (pages 18 and 22-23). This appears to be reasonable at present but as the model evolves and the range of

operating policies tested in the model expands, these assumptions may be problematic. Another example is the assumption in the model of the lumping of historical values of some inflows (WNI—watershed net inflow) and rainfall values (RF) into a single deterministic input series to the model (WNI+RF). The potential problem is that as the operating policies being tested in the model deviate from the historical operations, the WNI+RF values resulting from the simulated operations may deviate from the historical WNI+RF values used in the model. The surface and ground water systems in the region are linked hydraulically and it is possible that operations may affect the WNI+RF values. This may result in the model not representing the actual system as well as desired.

- vi. There are several ways to address the concern that the UK-OPS model has assumptions built-in that may limit its usefulness.
 - 1. For example, the UK-OPS model could be used to identify likely solutions to a particular problem or issue quickly, and then a more detailed or refined model (e.g. an appropriate MIKE model from DHI), could be used to verify those solutions are correct. This appropriately uses a quick but coarse tool like the UK-OPS model to screen alternatives, and confirms the findings with a more refined but computationally-burdensome model.
 - 2. Or, some sensitivity analysis could be undertaken. For example, if the question is whether a withdrawal of 5% from one of the lakes is acceptable, then the UK-OPS model could be run multiple times, first with the historical WNI+RF values, then with more conservative WNI+RF values, and then with less conservative WNI+RF values. The point is to bracket the range of possible, actual WNI+RF values in the three simulations. If all three runs conclude that the policy of a 5% withdrawal is acceptable, then there is greater confidence in the results. If the runs result in differing conclusions, then a more refined model (e.g. an appropriate MIKE model) may be used to clarify the conclusion.
 - 3.
- vii. On page 2 of the draft documentation, this statement is made: “The model does not contain limits on parameter values or warnings to caution users when results may not be realistic; thus the model should be used with substantial professional judgement. Future development efforts may expand and improve the user-interfaces. To enable a good understanding of the UK-

OPS Model, reading this document is a prerequisite. To use the UK-OPS Model in its current form, interactive training may be necessary.” It may be wise to put a comparable disclaimer and warning prominently on the spreadsheet model to ensure that inappropriate use is limited. Perhaps, a sheet titled “Read Me First” with this warning statement should be added to the spreadsheet.

- viii. Many of the cells in the UK-OPS spreadsheet have comments that define a term or describe the action needed. These comments are highly useful. As the model evolves, analogous comments could be added to more cells, and other more global comments (e.g. in text boxes) could be added to support a model user. If use of the model is to be expanded beyond the trained experts at SFWMD, the spreadsheet will need further documentation, either within the spreadsheet or a separate users’ manual, and additional programming to ensure inappropriate use (e.g. modification of equations, or entry of out-of-limits data or parameters) is limited.

b. UK-OPS Model – the documentation

- i. As stated above, the draft document associated with the UK-OPS model is not a users’ manual but does provide an overview of the model and its use. It fulfils this purpose well. It is well organized, well written, clear, and concise.
- ii. Nonetheless, all documents may be improved and clarified. Here are some minor suggestions:
 - 1. On page 27, first paragraph, Zone 10 is described as a 0.3 ft offset from Zone A. The Zone A line is shown as Zone 9 on Fig 3.4.4. This should be clarified.
 - 2. On page 27, the penultimate paragraph, is somewhat unclear. It would be useful to state that Zone X is the area between the lines labeled Zone X and Zone X+1.
 - 3. On page 28, last paragraph, the terms “C-38” and “Pool A” are used interchangeably. It is worth stating that these are the same thing.
 - 4. On page 32, last paragraph, second sentence, a range labeled “OpZonesTOH” is described. Similar ranges are cited in the following pages. It is worth stating that these ranges are predefined in the spreadsheet and stating where the user can find them.

Expert Scientific Peer Review of the Upper Kissimmee – Operations Simulations (UK-OPS) Model

By

Richard Punnett, Ph.D.

To

South Florida Water Management District
3306 Gun Club Road
P.O. Box 24680
West Palm Beach, Florida 33416-4680

Date: November, 2019

EXECUTIVE SUMMARY

At the request of the South Florida Water Management District, a peer review of the Upper Kissimmee – Operations Simulation (UK-OPS) Model and the accompanying Draft Documentation Report was conducted. The purpose of the scientific peer review was to examine the theoretical underpinnings of the UK-OPS model and to assess the appropriateness for the model for the intended uses.

The UK-OPS model simulates operational strategies using a water budget approach. Water budget models have been successfully used across the nation for a variety of water management purposes. Regional water budget models have been successfully used in South Florida water management evaluations for decades. The UK-OPS model is a newer version of previous Excel-based water budget models. The model is both impressive and sophisticated. Numerous modeling options are included which allows a user to quickly evaluate numerous operational strategies.

The model was correctly designed and developed to evaluate water withdrawals based on optional criteria for the large lakes: East Lake Tohopekaliga, Lake Tohopekaliga, and Lake Kissimmee-Lake Cypress-Lake Hatchineha grouping. The Documentation Report clearly lays out the modeling features, processes, hydrologic and operational assumptions, basic capabilities and limitations. The extensive model building experience and expertise of the SFWMD modeling staff were clearly evident. Numerous helpful graphics and performance indicators are provided by the internal post-processing of the model's basic hydrologic output. The basic output and post-processed information makes it easy to ensure that movement of water is correctly accounted for and that model operations are consistent with the modeling intent.

Helpful examples of both a position analysis run and a continuous simulation were provided in the Documentation Report. In the position analysis example, the value to help with seasonal operation decisions was obvious. The use of the continuous model run, to determine the magnitude and timing of water withdrawals that would be consistent with the Kissimmee River Restoration Project criteria, was clearly demonstrated.

The principle findings of this report are that the UK-OPS model was appropriately developed and that the model can be used for the intended purposes.

TABLE OF CONTENTS

EXECUTIVE SUMMARY	2
INTRODUCTION	4
PEER REVIEW COMMENTS	5
OVERALL FINDINGS AND RECOMMENDATIONS	16
APPENDICES	
A. Excerpts from Peer Review Statement of Work	18
B. Samples from the Spreadsheet Analyzer Results	26

INTRODUCTION

As part of an ongoing effort to manage the water resources of central and south Florida, the South Florida Water Management District is developing an Excel-based model of the Upper Kissimmee Chain of Lakes. The model was designed to improve the flow regime of the Kissimmee River Restoration Project (KRRP) and to evaluate the operations in the Kissimmee River Basin in order to better meet restoration targets while providing for other objectives such as flood control, recreational uses and water supply. The model focus is on the operation of the three major lake systems: Kissimmee-Cypress-Hatchineha (KCH); Lake Tohopekaliga (TOH); and East Lake Tohopekaliga (ETO). The model was named the Upper Kissimmee – Operations Simulation (UK-OPS) Model. The model capability was expanded for the Kissimmee Basin Water Reservation (KBWR) Rule criteria to evaluate potential surface water supply withdrawals in order to demonstrate that there would not be an adverse impact to the water resources and associated ecology of the lake systems, as well as the KRRP.

The Excel-based model performs a daily timestep simulation of the hydrology and operations of the Upper Kissimmee Basin (UKB) using a 49-year period of record. The model can make a continuous 49-year simulation or a position analysis simulation using the same initial conditions for each of the 49 years. The run time of the model is about four minutes. The most recent version is UK-OPS (v3.12) and is the subject of the peer review along with the Final Draft Documentation Report for the Upper Kissimmee – Operations Simulation (UK-OPS) Model, dated September, 2019.

The UK-OPS model also considers the smaller lake systems, upstream of the large lakes, for the purposes of setting hydrologic boundary conditions and for evaluating the potential effect of the in-lake Water Reservation Lines (WRL). Lakes Hart and Mary Jane (HJM), and Lakes Myrtle, Preston and Joel (MPJ) are upstream of, and generally release water into, ETO. The Alligator Lake Chain (ALC) and Lake Gentry are upstream of, and release water into, the KCH. The smaller lake releases are modeled implicitly as part of the Watershed Net Inflow (WNI) to each of the larger lakes.

The peer review experts were asked to examine the theoretical underpinnings of the UK-OPS Model and to assess the appropriateness of the model for recent applications. The peer-review experts' reports were to identify model strengths, limitations, any flaws in the model conceptualization, and the appropriateness of applications. Based on the peer-review reports, any suggestions would be strongly considered for improvements prior to the release of the Final Documentation Report and the UK-OPS model. An excerpt from the Scope of Work (SOW) for the Peer Review is attached as Appendix A. This report is one of the two peer review reports.

PEER REVIEW COMMENTS

The peer review comments presented here are divided into five sections. Each of the five sections relates to the five specific peer review questions as detailed in the SOW. The peer review experts were provided both with the UK-OPS Model Excel workbook and the Final Draft Documentation Report which provided the technical aspects of the model. The reviewers were to analyze and evaluate the model as documented.

Responses to SFWMD specific questions

Section 1. Is the water budget approach technically sound for its intended purpose, which is to enable simulation of alternative release strategies and potential water supply withdrawals?

Response:

The SFWMD has been involved in the development and successful use of Excel-based water budget models for many years. The popularity of Excel-based water management models by other agencies (such as those presented on the USDA, USGS and other state-operated websites) is a testament to the wide-spread faith and successful use of that application.

Water budget modeling has been used in South Florida studies by both the SFWMD and the Corps. In 1993, the Corps' Reconnaissance Phase of the Everglades Restoration Plan relied on developing and using a water budget model. Using the water budget model, the Reconnaissance Planning Phase identified several potential alternatives in which the project benefits would outweigh project costs, and the study was then advanced to the Feasibility Phase which became known as the Comprehensive Everglades Restoration Program (CERP).

Following severe droughts across the U.S. in the 1980s, Congress authorized the U.S. Army Corps of Engineers to conduct a nationwide survey to find a better way to manage water during drought. As part of the National Study of Water Management During Drought (simplified to the "National Drought Study"), "shared vision (computer) models" were developed using the water budget modelling approach. The approach fostered a collaborative use of the models between stakeholders, agencies, users, advocates and experts. Seven steps were identified in the shared vision approach; the third step involved building a shared vision computer model which depicts the reservoir storage, inflow, release and the rules governing releases. The shared vision model allowed users to evaluate a larger number of variables and more complex relationships than would otherwise be possible. Because the model was often used in real time during public meetings, the model had to be fast, easy to understand, verifiable and provide the output necessary for stakeholders use. Thus, water budget models, usually on a daily time-step, have been developed and extensively used with great success. In

1988, eight river basins across the U.S. were identified. One of the studies was conducted for the 12,300 square mile Kanawha River basin which covered parts of three states (NC, VA and WV). The peer reviewer of this report developed and successfully used a water budget model for that study. Because the UK-OPS model was designed and developed to function in the same manner as the shared vision models for planning, the model would also be effective in a shared vision process for regulatory purposes. Because of the UK-OPS model's ease of use and ability to quickly screen different alternatives while quantifying the effects of water withdrawals, permitting thresholds can be quickly evaluated.

Section 2. Is the water budget approach applied correctly for the three large lake systems that use the hydrologic routing computations, namely Lakes KCH, Tohopekaliga, and East Tohopekaliga?

Response:

At the heart of any hydrologic modeling approach is that the model must conserve mass. Beyond that, the models must correctly apply generally recognized equations, calculations of structure flow equations, identification of water sources and losses, and properly coded rule-based operations. Furthermore, there should be an identification of the inherent limitations of the models.

Apart from the correct application of equations, flow calculations, definitions of rule-based operations, etc., the modeling of those parameters must be accomplished within a numerical modeling environment – in this case the Excel Spreadsheet program. Because of the common usage of Excel, many users – apart from the developers – can evaluate the UK-OPS spreadsheet model. To aid in the spreadsheet evaluation of consistencies, dependencies and values for this report, a spreadsheet analyzer, Excel Analyzer, was used. Excel Analyzer was developed by Spreadsheetsoftware (<http://www.spreadsheetsoftware.com>). In part, the Excel Analyzer identifies and highlights potential errors, evaluates and highlights unique equations, checks variable names for consistency, checks links between worksheets, evaluates table entries, can eliminate extraneous cells (thus reducing the size of a workbook), checks for and can resolve may spreadsheet errors, analyzes embedded VBA coding, checks for errors in chart formulas and conditional format formulas, identifies hyperlinks, checks for name errors in inter-sheet links, checks for hidden data, provides formula statistics for each worksheet, generates a list of all comments, and generates a model flow sheet that visually displays dependencies between worksheets. Although Excel Analyzer is particularly helpful to spreadsheet developers, it was helpful for this evaluation. In short, no errors were found in the UK-OPS Excel spreadsheet model. Samples of the Excel Analyzer output products are provided in Appendix B.

For the three large lakes (ETO, TOH and KCH), the methodology described in the documentation is consistent with common modeling practices. The smaller, upstream lakes were used appropriately as boundary conditions for the larger lakes.

Thus, the inflows, plus rainfall, plus intervening watershed flows (both surface and groundwater), minus large-lake evapotranspiration (E.T.), and minus large lake outflows, constitutes the bulk of a large-lake water budget.

Some of the difficult terms to quantify are intervening watershed flows, groundwater contributions, past withdrawals, non-uniform rainfall, and surface water inflows from minor tributaries (not gauged or measured). For water budget models, a common practice is to use lumped, calculated values. The UK-OPS model uses the Watershed Net Inflow (WNI), together with lake rainfall (RF), for this purpose. For ETO, TOH, and KCH, the daily values of WNI+RF was calculated by accounting for the known (measured or calculated) lake outflows, inflows, changes in lake storage, and ET losses. The equation used in the UK-OPS model is a rearranged form of the continuity equation (a.k.a. the mass balance equation). In water budget models, the conservation of water in a system can be evaluated at every timestep or other intervals. The conservation of water in a modeled system over time is a strong indicator that the modeling of alternatives is reliable.

As with *any* numerical modeling, some sources of error are: calculation of flows through a structure; applying rainfall measured at point (or points) over a region; the unavailability of historic records; quantifying local groundwater and/or surface water withdrawals amounts over years; the application of ET losses (which can seasonally vary with watershed land-cover changes and local winds); soil moisture changes; estimates of lake storage and stage relationships; and the effect of wind across a lake surface that can cause water levels to be temporarily “tilted” resulting in a seiche (where the lake sloshes between opposing shores) that may last for days. The seiche effect of several feet has been measured on Lake Okeechobee. Additionally, river flow velocities change over time due to many factors including the magnitude of the flow.

To the unaccustomed model user, the daily WNI+RF values may be larger and more variable than expected. This is primarily because the distance between lakes vary and flow routing times vary. This is similar to comparing a check book balance to a bank balance on a daily basis. There are time variations between making a deposit or withdrawal and seeing the actual increase or decrease register at the bank. Similarly, a release from one lake may take longer or shorter than a day to reach the next gauged site. Ultimately, the timing issues do not change the actual accounting of the balance. The WNI+RF term corrects for the changes in timing (as well as the non-level lake issues) and when used with the simulated water balance, correctly conserves water. On an annual average basis, the WNI+RF values given in the UK-OPS workbook were fairly consistent and reasonable (as reviewed in the WatBuds tab).

The strength of the water budget approach is that when most inputs are held constant, the effect of operational strategies alone can be observed as changes in flow and stage in the modeled system. With the period of record values of WNI+RF held constant through each model run, the effect of alternative operations can be more readily observed. As long as there are not great changes in stages and flows over the run, the effect of operations can be reliably evaluated. As discussed later, a review of

the numerous output graphics and tables, with emphasis on the Water Budget analysis, also provides a degree of confidence in the spreadsheet application and modeling approach.

In the Documentation Report, the verification model run output was given which demonstrated that the simulated outflows replicated the stages of the historic outflows (used to calculate the WNI+RF values). Absolute consistency with the routing calculations with the historic stages shows that the model conserved mass. This agreement was seen in the graphics and tables provided.

As presented in the Documentation Report, water budget approach was correctly applied for ETO, TOH and KCH. The use of the WNI+RF term appropriately accounts for the hydrometeorological gains and losses of the many variables that were not explicitly modeled. The water budget approach has proven to be successful in many South Florida modeling efforts as well as in other hydrologic models across the nation.

Section 3. *Does the draft technical documentation adequately describe the model's fundamental features, basic capabilities and limitations, and the algorithms used to simulate lake releases and water levels? Are there any specific suggestions to improve the description of the model?*

Response:

Since the UK-OPS model was specifically designed and developed to evaluate operational alternatives and the associated system changes, being able to define current and alternative lake operational criteria are critical. For each of the large lakes, the Documentation Report clearly presents the current regulation schedules along with a future KCH regulation schedule (RS9D) to be implemented upon completion of the Kissimmee Headwaters Revitalization Project. Operational zones for determining discharges were presented along with zones established for fish and wildlife protection. Users can modify the break points established for the various zones. The spreadsheet will calculate the values needed for a daily timestep from the break points.

The weir equation is used to calculate the outflow from ETO, TOH and KCH in the model runs. However, some limitations were set on the maximum allowed outflows. For ETO, the spillway capacity is 1300 cubic feet per second (cfs) even though the highest peak flow over the period of record was 2160 cfs. As noted in the Documentation Report, if an analysis of flood peaks is desired, then the model would need refinement. Also, ETO has a maximum allowable gate opening and a maximum permissible head difference across the structure that are not explicitly modeled in the spreadsheet. If a user desires to raise the spillway capacity to more than 1300 cfs, the user should contact the model developers for more guidance. Because the 1300 cfs limit is consistent with the 99th percentile value of the period of record flows (1965 to 2005), this is a reasonable limit for the kinds of operational alternatives envisioned in the Documentation Report. By viewing the graphic provided on the FlowpercsS59 tab of

the UK-OPS workbook, the rarity of the 1300 cfs limitation can be seen for alternatives.

Similar to the maximum flow capacity and rationale at ETO, TOH outflow capacities were limited to 2300 cfs (the 98th percentile value): the maximum flow over the period of record was 3750 cfs. Also, ETO has a maximum allowable gate opening and a maximum permissible head difference across the structure that are not modeled in the spreadsheet. If a user desires to enter a maximum outflow capacity greater than 2300 cfs, the user should contact the model developers for more guidance. The 99th percentile flow value was 2600 cfs; the 2300 cfs limitation is a reasonable limit for the kinds of operational alternatives envisioned in the Documentation Report. By viewing the graphic provided on the FlowpercS61 tab of the UK-OPS workbook, the rarity of the 2300 cfs limitation can be seen for alternatives.

KCH outflow capacity is set at 11,000 cfs which is the spillway design capacity at S65. The model does not simulate stages downstream of S65, so normal weir calculations are not made and releases are determined using a stage rate-of-change relationship with outflow as described in the Documentation Report. In reviewing the historic data at S65, using the spillway design capacity is reasonable. Additionally, the model developers determined the Kissimmee River stages would not reduce full capacity of 11,000 cfs.

The historic flow and stage data are given in the DATAforUKOPS tab of the UK-OPS workbook. A user can review the data, make plots, and locate high flow periods to evaluate the maximum flow limits of historic data, if desired. The effect of slightly lowering the maximum releases may cause a slight increase in the duration of a rare and extreme event, but would not alter the mass balance. A slight increase in the event duration would not be a significant issue. During extreme high-flow periods, the likelihood of concerns over a water supply withdrawal would be minimal. Content descriptions of the other worksheets are provided in the Documentation Report. Additionally, the sources of data are provided.

If flow increases greater than normal gravity flows over a spillway are desired, the UK-OPS model includes an additional pumping capacity for the outflows of ETO and TOH. This pumping capacity could be used to augment spillway flows if they are not sufficient to achieve a desired outflow. Because the additional pumping may reduce the spillway flows by raising the tailwater conditions, a user-defined percentage reduction of the spillway flows is optional.

For each timestep, the amount of storage in each of the large lakes is calculated. From the amount of lake storage, a stage-storage relationship is used to calculate the resulting lake stage. This is a common and acceptable practice in the water budget modeling of lakes.

The documentation provides ample information to understand the basic capabilities, features, use of algorithms and model limitations. Additionally, there are over 2000 comments included in the UK-OPS workbook.

SUGGESTIONS:

- A. A sample paper work sheet (i.e. a handout) could be developed to help users identify what specific changes (and which tabs) are required for an alternative. The paper work sheet would also help identify alternative changes that could be evaluated by a reviewer other than the user. The sheet could be attached as an Appendix to the Documentation Report.
- B. Improve the description of the option to reduce spillway flow when using additional pumping. Perhaps a nomograph could be constructed that would help a user to quickly estimate a reduction percentage. If this option is not anticipated to be widely used, then a case-by-case evaluation may be sufficient. It is also recommended to add a figure to the UK-OPS model documentation report to clarify this hydraulic condition. The figure could show a profile view of headwater and tailwater stages, the gated spillway, and adjacent pumps.
- C. The continuity equations for ETO and TOH should explicitly show the water supply withdrawal term.
- D. Future versions of the model should consider the explicit simulation of the continuity equation and operations for the small lakes, HMJ, MPJ, GEN and ALC. This would allow for withdrawal investigations of the Eastern branch of the Kissimmee Chain-of-Lakes. Alternatively, a separate analysis could be conducted to determine the benefits (if any) of adding this explicit simulation of the small lakes.

Section 4. *Is the model suitable for simulating alternative operating criteria for East Lake Tohopekaliga, Lake Tohopekaliga, and Lakes Kissimmee, Cypress, and Hatchineha?*

Response:

The UK-OPS model was constructed to be able to change the important variables associated with the purpose of running an alternative. The user-friendly construction of the UK-OPS is both rare and impressive. Typically, a user has to be familiar enough with the model construction to go to a certain area of a model and change certain variables. Clearly, the UK-OPS model was developed with the intention of building alternative operations and making the evaluations easy and rapid. The GUI on the first worksheet gives the new user an excellent starting point to build and compare alternatives. A new user can select a button from the GUI page to change the type of model run (position analysis or continuous), start a model run, identify up to four runs for comparisons, or go directly to a number of input and output graphics/tables. The Documentation Report discusses the contents of the various worksheets so users

will know where to go in the workbook to view/change variables. Regardless of the user experience, the UK-OPS model provides ample options for making alternative operation evaluations.

Some of the UK-OPS modeling options provided for creating alternatives should be used by experience users. These include: significant changes in the breakpoints of operational zones, significant changes in the discharge curves and increases to maximum outflow release criteria. An experienced user can chose to input a new set of outflow operating rules for an alternative (Outflow option 4 for ETO and TOH, for example). Those types of changes require a higher degree of output evaluation than normally required.

Options for creating alternatives that would be more commonly used for evaluating water supply withdrawals would be: making minor changes in the breakpoints of operational zones and/or water reservation lines, selecting different of outflow operations for the large lakes, selecting different pump sizes to augment gravity flows over a spillway, selecting different withdrawal rates, and selecting different lakes for making withdrawals.

Without sufficient output products and information, an alternative evaluation is difficult. The UK-OPS includes many hydrologic graphics, performance indicators, and tables to facilitate alternative evaluations. A description of the graphics, tables and performance indicators was provided in the Documentation Report. Users should always evaluate the stage and flow output of the model from the standpoint of ensuring the results are consistent with the modeling intent on a daily basis. The daily stage and flow data can be used to determine if any unusual changes occur. The stage (or flow) duration curve can be considered the equivalent of an executive summary of changes to determine if changes in stage or flow tend to occur during high or low events. Other performance indicators included in the model output can be used to evaluate the viability/suitability of a model run.

The UK-OPS model is currently used in a position analysis mode for real-time water management decisions. The example given in the Documentation Report shows the model can be used to simulate flows from ETO, TOH and KCH. Lake stages are presented in terms of stage percentiles for different events. The model will predict flows from S65A which are then routed through a Kissimmee River model for use as a major input source for Lake Okeechobee simulation models. The fact that the UK-OPS model is currently being used for position analyses is a testament to the modeling staff's faith in the model.

From the continuous run example in the Documentation Report, the model can be used for simulation of operational alternatives at TOH and KCH. Although not specifically shown, the spreadsheet construction and documentation leave little doubt that ETO operational alternatives can also be correctly simulated.

Regardless of the user experience, the UK-OPS model provides ample options for creating, simulating and evaluating alternative operations for ETO, TOH and KCH; users can also make position analysis runs if current condition data are known. Because UK-OPS was developed as an Excel workbook, users have the ability to create new performance measures or new statistics to help evaluate parameter sensitivities and to identify favorable alternatives. These abilities make the UK-OPS model particularly suitable for evaluating operations for the three large lakes.

Section 5. Is the model suitable for evaluating: (1) individual and cumulative water supply withdrawals, (2) the associated Kissimmee Basin Water Reservation criteria limitations on those withdrawals, and (3) the effects of water supply withdrawals on the 5% maximum reduction criteria at S65?

Response:

The options available for creating and simulating different operational alternatives are sufficient for the intended use of the UK-OPS model which is to quickly test alternative operating strategies. The evaluation of alternatives is relatively easy and the prediction of changes in flow at S65 were shown to be sensitive to water supply withdrawals from TOH.

Withdrawals from the smaller upstream lakes would ultimately reduce the flow into ETO, TOH and KCH. Therefore, the cumulative effect of making water supply releases from ETO, TOH and the small lakes can be quantified at S65. Since the smaller lakes are not explicitly modeled for the purpose of making water supply withdrawals, the spatial distribution of water supply withdrawals from HMJ, MPJ, ALC and GEN cannot be determined with UK-OPS. Instead, the UK-OPS Model determines the timing of the allowable withdrawals from the small lakes, but approximates the withdrawal by making it from the next downstream large lake. In the UK-OPS model, it is assumed water supply withdrawals are made directly from the large lake, or its tributary inflow, and would not be achieved by using the upstream water control structure.

The large lakes in the UK-OPS model represent 86% of the total storage in all the managed lakes upstream of S65. The simulation of the water supply withdrawals from the three large lakes ETO, TOH and KCH is sufficient to determine the potential cumulative flow reductions at S65 over the period of record used.

MODEL SUITABILITY

The determination of model suitability is not only an evaluation of the equations, construction and available options for creating alternatives, but also whether or not the use is appropriate. To fully appreciate the water budget approach (UK-OPS) when a more detailed model is available (Mike11/MikeSHE), the following points were considered:

1. What are the some of the specific question that need to be answered? Two questions were considered:

First, using the KBWR Rule criteria, what is the maximum withdrawal capacity needed that would achieve water supply deliveries so that there is no more than a 5% reduction at S65? Essentially, this is a water budget evaluation since the flow reduction criterion is set at a specific point. Although there are system wide constraints (WRLs), system wide impacts need not be considered unless significant large withdrawals are made. The continuous run example given in the Documentation Report identifies a hypothetical max withdrawal rate of 64mgd, or less, from Lake TOH. Since the WRL constraints were all included and TOH met the withdrawal demand, system wide impacts are not likely.

Second, what use does the position analysis provide? Position analysis allows evaluation of shorter-term operating plans, which are to be implemented seasonally (about 6-months). Rapid assessment of alternative operations is needed to help the interagency scientists test and evaluate many ideas. This could only be done with UK-OPS because more-detailed models like the Mike SHE/Mike 11 model takes more than 10 days to perform a 50-year simulation. A run time of four minutes is valuable whereas a run time of 10 days would not be useful.

2. Is there a specific target or are wide-spread impacts being evaluated?

If wide spread system targets and impacts require evaluation, this could only be done by the Mike11/MikeSHE model. Since the specific target given by the KBWR Rule criterion is a flow reduction set at a point, S65, UK-OPS can simulate flow changes at that point. Specific evaluation of impacts to wetlands, groundwater resources, flooding, etc., cannot be performed with the UK-OPS Model.

3. Is the alternative modeling of ETO, TOH and KCH sensitive to operational alternatives?

Sensitivity to upstream operational changes would be expected in either model. The continuous run example in the Documentation Report demonstrates the usefulness of UK-OPS. If the *best* estimate of flow at S65 was required, there would be debate. However, because the question involves a flow difference due to operational changes and/or water supply withdrawals, the UK-OPS model certainly would be sufficient.

4. Is there a direct modeling solution or are iterations required?

In the continuous run example in the Documentation Report, it was stated that an iterative solution was used. If a specific operational target is required, a "one run and done" is unlikely with any model.

While iterations are possible with time and multiple computers using Mike11/MikeSHE, the four-minute run time of UK-OPS is favorable for a quick and easy resolution.

5. Is an understanding of the sensitivity to operational parameters desired?

When the effect of changing any modeling parameter is unknown, there must be some sensitivity runs. These runs will not only help in planning iteration runs toward meeting a target, but also highlights which parameters are more sensitive than others. If a parameter is particularly sensitive, additional evaluation of the parameter may be needed. Again, the need for multiple runs favors the use of UK-OPS.

6. Are multiple base assumptions to be considered?

In the case of a system where three lakes (or more) can be considered for operation changes, base assumptions change. A hypothetical example would be: which lake, or combination of lakes, should have a modified operation that best meets the target flow? Where there are multiple lakes that can be operated differently, there can be multiple iteration runs for each lake or lakes combination. This complexity can be easily handled by UK-OPS.

7. Who are the potential users?

Within the SFWMD, there are requirements for both models. The specific need would be a determining factor. However, if the model is to be used outside the SFWMD, only the Excel-based UK-OPS model would have universal applicability whereas few stakeholders have the ability to make and evaluate Mike11/MikeSHE model runs.

8. What operational lessons can be learned from the information given on the continuous run example in the Documentation Report?

In the continuous run example in the Documentation Report, several germane points can be made: (a) the UK-OPS model can be used to determine the total capacity of the combined water supply withdrawal facilities (64mgd) from Lake TOH, assuming no withdrawals from the other lakes; (b) the S65 maximum flow reduction target is sensitive to water supply withdrawal alternatives with the UK-OPS model; (c) the Lake Okeechobee non-flood release criterion (aka Lake O constraint) can be severely restrictive compared to the KBWR Rule criteria flow reduction target; (d) withdrawals from TOH alone could meet or exceed the KBWR Rule criterion of not more than a 5% maximum reduction at S65, (e) water supply reliability is highest during the March to June timeframe which is associated with the drawdown prior to the wet season, (f) the average annual withdrawal was 39 kaf/yr (or 19 kaf/yr with the Lake Okeechobee restriction), and (g) water supply withdrawals become much less reliable with the Lake Okeechobee restriction in all but the very wet periods.

LIMITATION

When modeling extreme changes system parameters, a water budget approach would not be as appropriate as a more detailed modeling. For example, if significant increases or decreases in downstream river stages or flows occur, then other hydrologic effects, not modeled in a water budget model, might become significant. A user should always evaluate the daily stage and flow data output for unusual or extreme changes.

OVERALL FINDINGS AND RECOMMENDATIONS

The model development expertise of the SFWMD modeling staff is apparent in the design and construction of the UK-OPS Excel-based model. The model was developed to specifically address evaluations associated with the operation of the large lakes in the Upper Kissimmee Basin and the Kissimmee River Water Reservation Rule criteria. The evaluation of the KBWR Rule criteria primarily involves predicting flow reductions at S65 which ultimately is a water budget question. This kind of modeling analyses may also involve an iterative process which also favors a water budget approach. The UK-OPS model can be used in a position analysis mode which enables the rapid design and evaluation of seasonal operating plans.

The author of this report whole-heartedly agrees with this statement from the Documentation Report, Summaries and Conclusions: “Strengths of the UK-OPS Model include the ability to rapidly test alternative operating ideas (runtime of 4 minutes versus days or even weeks for the more-detailed models), ease of use in a readily-available environment (Excel), broad range of options for specifying alternative operations, immediate updating of the outputs and performance metrics, and flexibility to modify the Excel worksheets and chart sheets to add additional features and/or performance summary graphics.”

The Documentation Report provides the detail necessary to understand the equations, rules and processes involved in the model. Standard water budget modeling procedures and practices were employed. By reviewing the Documentation Report and the UK-OPS model together, a potential user can get a clear understanding of the modeling input, processes and outputs. The UK-OPS model internally generates a series of hydrologic outputs and performance indicators. With little training, new users of the model can make meaningful operational alternatives within the Kissimmee River Basin by simulating and evaluating the operations of the three largest lakes.

It is recommended that a separate Excel-base model be developed for the purpose of testing *or characterizing* the effect of water supply withdrawals on lakes HMJ, MPJ, ALC and GEN. The new workbook could link to the output from UK-OPS to retrieve data specific to a modeled alternative. Such an effort would help to determine the sensitivity of water supply withdrawals from the small lakes on the 5% KBWR Rule criterion and the validity of the current assumption that makes the small lake water supply withdrawals from the next-downstream large lake

It is also recommended that a one-day workshop be scheduled for potential UK-OPS users. The workshop could supply the knowledge and skills necessary to understand and start using the UK-OPS model. If a recording of the workshop was made, future users could reference the on-line recording and benefit from the same workshop. Further, development of an accompanying handout which provides the blank spaces for selection of a modeling options and spreadsheet location of pertinent variables would be immediately helpful.

The key finding and recommendation from this report is that the UK-OPS model can be used for the intended purposes. The model does not require any significant changes. While improvements are possible, the current status is usable by model developers and other interested users.

APPENDIX A

Excerpts from the Peer Review Statement of Work

**H&H Bureau
Statement of Work (SOW)
for Expert Scientific Peer Review of the
Upper Kissimmee - Operations Simulation (UK-OPS) Model**

Project Manager:	Danielle Morancy
Project Technical Lead:	Calvin Neidrauer
Project Name:	Independent Scientific Peer Review of the Upper Kissimmee - Operations Simulation (UK-OPS) Model
Date:	September 30, 2019

Statement of Work Summary

This Statement of Work (SOW) defines services to perform a scientific peer review of the Upper Kissimmee - Operations Simulation (UK-OPS) Model.

The UK-OPS Model has been created and is maintained by the South Florida Water Management District (SFWMD or District) in West Palm Beach, Florida. This model is a computational tool that can be used to evaluate various water management operations and surface water withdrawal scenarios for both continuous (period-of-record) simulations and position analysis. As part of the development life cycle of this model, two experts in hydrologic modeling will be chosen to examine and evaluate the model's conceptual formulation, and review how the model has been applied to address project objectives for various projects in south Florida. The purpose of this work is to improve the overall quality of the UK-OPS Model by identifying the strengths, weaknesses, and limitations in the model theory, conceptual formulation, and typical applications.

The experts' scope of work shall consist of the tasks specified in section 3. These tasks include:

1. Reading supporting UK-OPS Model documentation and preparing initial comments.
2. Participating in a one-day teleconference in October 2019. The teleconference is to demonstrate the model utility and provide opportunity for Q&A with model developer and reviewers.
3. Preparing a report on the model's suitability.

1.0 Introduction

In 2014-15 the SFWMD completed initial development of the Upper Kissimmee - Operations Simulation (UK-OPS) Model. The model was initially developed to enable rapid testing of alternative operations for the following lakes in the Upper Kissimmee Basin (UKB) (Figure 1): (1) East Lake Tohopekaliga (East Lake); (2) Lake Tohopekaliga (Lake Toho); and (3) Lakes Kissimmee, Cypress, and Hatchineha (Lake KCH). The model was initially used to evaluate alternative operations for seasonal planning of these lakes and inflows to the Kissimmee River.

In 2016 the UK-OPS Model was modified to include proposed water reservation lines associated with the development of the Kissimmee Basin Water Reservation Rule and to enable testing of potential water withdrawal scenarios. The aim was to enable the UK-OPS Model to be used as a regulatory tool by future permittees, consultants, and District permit reviewers for evaluating the potential impacts of accumulative surface water withdrawals on proposed Kissimmee River and Chain of Lakes water reservation criteria. The model will help prevent over-allocation of withdrawals to ensure the protection of fish and wildlife located in the Upper Chain of Lakes, Headwater Revitalization Lakes and the Kissimmee River Restoration project.

Throughout the period 2014-2019 the UK-OPS Model was refined to increase its utility. The current version and associated documentation is for UK-OPS(v3.12). The peer review will evaluate the conceptual framework of the model and assess its suitability for specific applications.

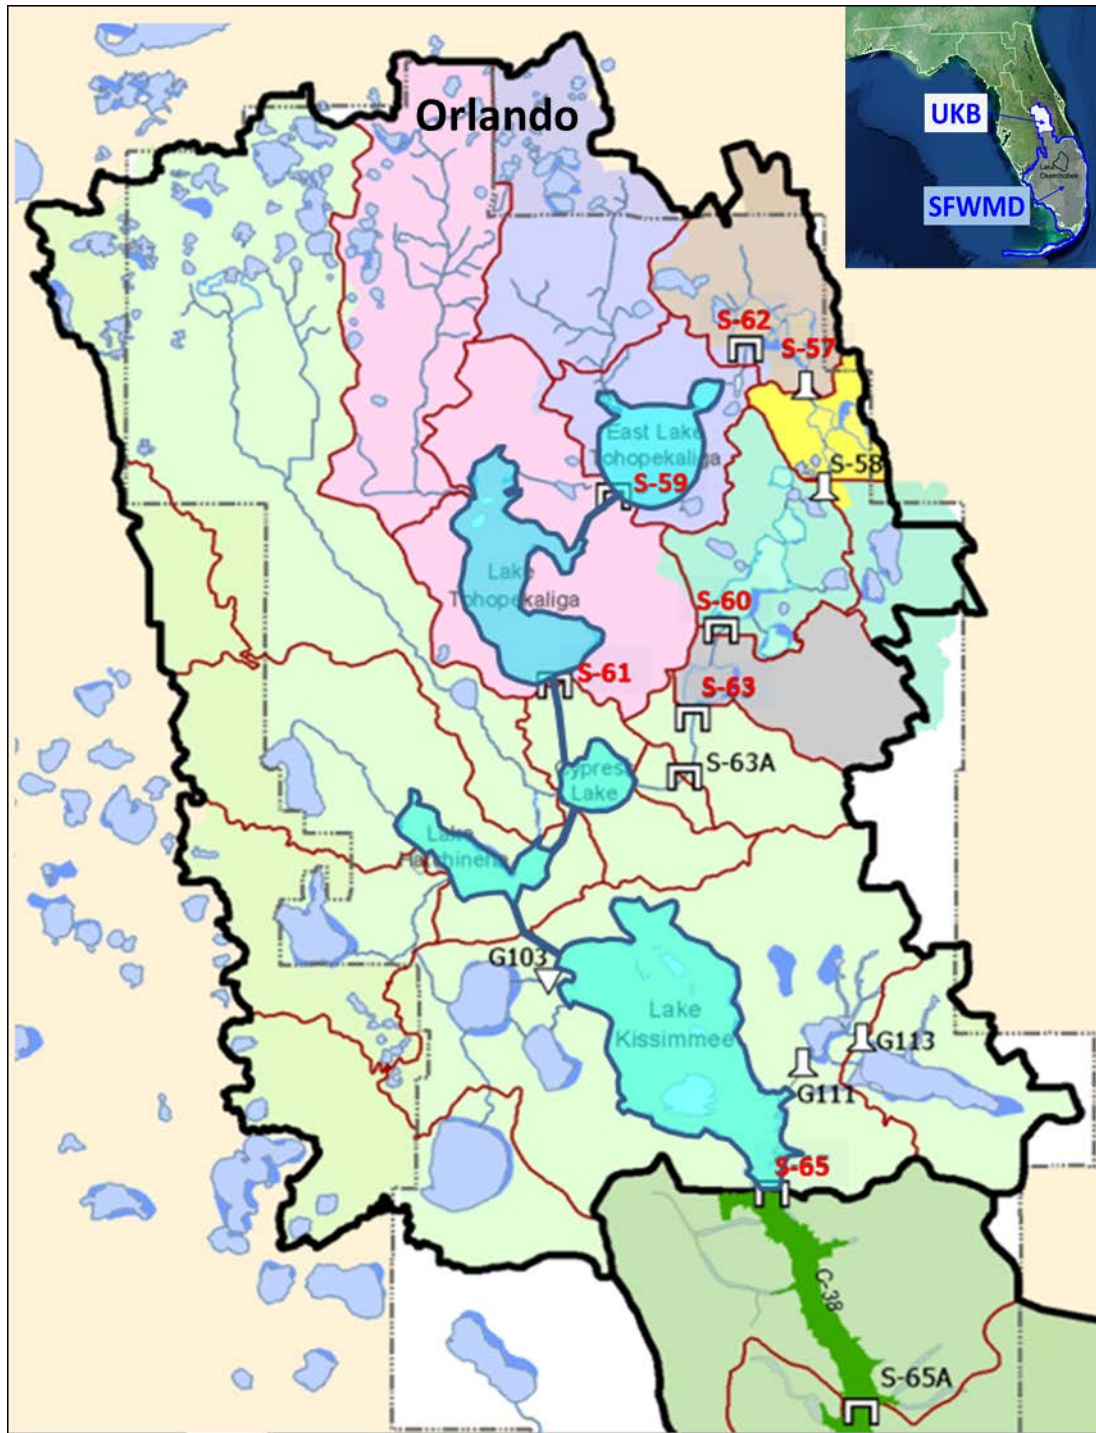


Figure 1. Map of the Upper Kissimmee Basin highlighting the Larger Lake Systems: East Lake Toho (ETO), Lake Toho (TOH), and Lakes Kissimmee, Cypress, and Hatchineha (KCH).

1.1 UK-OPS Model Scope

The UK-OPS Model is a spreadsheet-based hydrologic simulation model of the larger lake systems in the Upper Kissimmee Basin (Figure 1). The model can be used to test alternative operating criteria for seasonal operations planning. The UK-OPS Model can also be used to simulate the effects of surface water withdrawals subject to criteria proposed by the Kissimmee Basin Water Reservation Rule. Model users include experienced analysts, scientists/modelers involved with seasonal operations planning, consultants involved with analysis of proposed surface water withdrawals from UKB lakes, and SFWMD regulatory staff who evaluate such proposed withdrawals and issue water-use permits.

Considering the application of the UK-OPS Model for assisting with the development of the Kissimmee River and Chain of Lakes water reservation rule criteria and future water-use permit applications, it is prudent to have the model peer reviewed to establish its credibility and to reduce the chances of technical challenges and associated delays in rule development.

1.2 UK-OPS Model Features

The UK-OPS Model is a lumped-parameter hydrologic and planning-scale model of the larger lakes in the Upper Kissimmee Basin. The model does not simulate the rainfall-runoff process. Rather it uses watershed inflows from the historical record or from a distributed parameter model like Mike11/MikeSHE. The UK-OPS Model uses a daily timestep and currently simulates lake stages and releases for the 48-yr period 1965-2012.

The model can operate in continuous simulation mode for typical planning analysis, or in position analysis mode for shorter-term operations planning purposes. The continuous simulation mode produces one simulation for the period of record (one 48-yr simulation). The position analysis mode sets initial lake stage conditions and produces one simulation for each year of the period of record (48 1-yr simulations). The model automatically generates a wide variety of hydrologic performance metrics (hydrographs, duration curves, and assorted statistical summaries) to facilitate rapid analysis and comparisons of alternative plans. Details are contained within the Final Draft Documentation Report for the Upper Kissimmee - Operations Simulation (UK-OPS) Model (September, 2019).

To verify the appropriateness of the model, it requires peer-review by subject matter experts. The peer reviewers will try to identify the strengths, weaknesses, and necessary enhancements in the model conceptualization/formulation and in the software implementation.

2.0 Peer Review Expectations and Guidelines

The overall objective of this work is to perform a peer review on the conceptualization, implementation, and application of the UK-OPS Model to improve its overall quality and acceptability. This will be accomplished by review of the model by subject matter and scientific experts who will consider the conceptual and mathematical framework of the model and the appropriateness of the model for specific applications. It is expected that review will be accomplished by two experts, each providing their own report and independently contracted with

the SFWMD.

A final draft model documentation report will be provided to each peer review expert for review. The UK-OPS Model Excel file will also be provided. If the peer-review panel's report identifies meaningful flaws in the model, the model will be revised, and the final documentation report will be modified as necessary.

As shown in Table 1, the experts will be expected to attend a one-day workshop/teleconference in October 2019. This session will help the experts gain a better understanding of the UK-OPS Model, its capabilities, and its past applications.

Table 1: Peer Review Project Schedule and Responsibilities

Task	Date Range
Examine or Study UK-OPS Model Documentation and submit preliminary comments and questions.	From date of execution until the workshop September 30, 2019 – October 14, 2019
Participate in a 1-day workshop/teleconference	October 21, 2019
Submit final report	3 weeks after workshop

During the workshop/teleconference, a presentation & model demonstration will be made to familiarize the experts with the model. The presentation will be conducted by the UK-OPS Model developer so that the experts can interview the staff most familiar with the tool.

This SOW will serve as the task instructions for the experts until the workshop/teleconference. Any questions need to be submitted in writing to the SFWMD to allow communications to be conducted in accordance with Florida's public records statutes. The public can be informed by reviewing information and links to be provided on the SFWMD web-site. Public comments will be accepted during the three-week period after the workshop/teleconference.

2.1 Peer Reviewer Areas of Expertise

Qualifications of desired peer review experts include:

1. A recognized expert on hydrologic model development and model applications to multiple lake/reservoir systems.
2. Familiarity with central Florida hydrology and experience with modeling and/or operation of the Upper Kissimmee Basin.

2.2 Peer Review Goals

The peer review experts are asked to examine the theoretical underpinnings of the UK-OPS Model and to assess the appropriateness of the model for recent applications. The final draft model documentation report will contain this information and will be the primary focus of the peer review. The peer-review expert's reports will identify model strengths, limitations, any flaws in the model conceptualization, and the appropriateness of applications. Recommendations from the

peer-review expert's reports will be strongly considered for incorporation in the final model documentation report. Any meaningful flaws in the model will be corrected prior to future use.

The peer review experts will be provided both the UK-OPS Model Excel workbook and the final draft report documenting the technical aspects of the model. The reviewers should analyze and evaluate the model as documented. The specific questions that the reviewers need to answer are listed below:

1. Is the water budget approach technically sound for its intended purpose, which is to enable simulation of alternative release strategies and potential water supply withdrawals?
2. Is the water budget approach applied correctly for the three large lake systems that use the hydrologic routing computations, namely Lakes KCH, Tohopekaliga, and East Tohopekaliga?
3. Does the draft technical documentation adequately describe the model's fundamental features, basic capabilities and limitations, and the algorithms used to simulate lake releases and water levels? Are there any specific suggestions to improve the description of the model?
4. Is the model suitable for simulating alternative operating criteria for East Lake Tohopekaliga, Lake Tohopekaliga, and Lakes Kissimmee, Cypress, and Hatchineha?
5. Is the model suitable for evaluating: (1) individual and cumulative water supply withdrawals, (2) the associated Kissimmee Basin Water Reservation criteria limitations on those withdrawals, and (3) the effects of water supply withdrawals on the 5% maximum reduction criteria at S65?

2.2 Anticipated Benefits

The recommendations from the peer review reports will guide the SFWMD to make any necessary modifications to the UK-OPS Model and associated documentation report. The peer review will help the SFWMD to achieve a higher quality model that is scientifically defensible and more reliable.

3.0 Scope of Work (Duties and Tasks of Experts)

During this project, the peer review experts will be asked to conduct the following work:

- 1. Examine or Study the Final Draft UK-OPS Model Documentation Report sent to you by the Peer Review Project Manager.**
- 2. Prepare questions or editorial comments on all information prior to the workshop.** Experts should come to the workshop/teleconference prepared to discuss strengths and weaknesses of the model conceptualization and its applications. Written submittal of questions and comments at least one week prior to the workshop/teleconference will help SFWMD staff to prepare and better address the reviewers questions and comments.
- 3. Participate in a one-day workshop/teleconference during October 2019.** Peer review experts will participate in the workshop/teleconference to learn more about the model and

to ask questions about it. It is expected that experts will have reviewed the draft model documentation report prior to the workshop/teleconference.

- 4. Write an Expert Report.** Experts will each prepare a report which addresses the goals of this peer review. A draft report shall be submitted two weeks following the workshop. Panelists will consider SFWMD comments on the draft deliverable and submit a final report three weeks following the workshop.

APPENDIX B

Samples from the Excel Analyzer Output

for the

**UK-OPS Model
V3.12**

**Developed by
Spreadsheetsoftware**

The following snapshots were made (as a sampling) from the output products of the Excel Analyzer by Spreadsheetsoftware (<https://www.spreadsheetsoftware.com>). A new evaluation tab is generated by the Excel Analyzer for each tab in the model. Colored variable names often indicate linkages to the spreadsheet location(s). Not all Excel Analyzer products are presented in this appendix.

1 Formulas		Info		11 Formula Filter Options			
Report generated: 16 days, 4 hours and 28 min ago		0 #REF! Error		3,729	Absolute Formula		
✓ This report is up-to-date		382 Hardcoded Formulas		0	Array Formula		
		0 External Links		0	Table Formula		
		3,646 Formula Intersheet Links		0	User Defined Function		
		575 Formula with Function		317	Formulas with Name		
		114 Formula with "Text"					
Sheet No.	Sheet Name (link)	Unique Formulas		Unique Formulas		Formulas (link)	Formulas with Name
		Total	Once on Sheet				
		4,201	3,680			423,492	317
1	GUI	12	12			12	12
2	KCHops	27	3			10,350	14
3	TOHops	14	4			3,689	6
4	ETOops	15	3			3,692	6
5	HMJops	7	1			2,938	3
6	MPJops	7	1			2,938	3
7	ALCops	8	1			2,948	3
8	GENops	9	3			2,941	4
9	KCHsim	115	34			873	30
10	TOHsim	97	27			36,517	30
11	ETOsims	102	28			18,664	30
12	HMJws	23	10			18,039	10
13	MPJws	25	11			18,047	11
14	ALCws	22	9			18,031	9
15	GENws	20	8			18,023	8
16	TSplots	5	4			52	
17	Events	58	36			4,101	27
18	MaxStages	29	14			266	8
23	Data4BWplots	3,383	3,366			4,766	12
24	Data4TSplots	43	27			143,247	41
25	StagePercsKCH	2	2			2	1
26	StagePercsTOH	0	0	This sheet contains no formulas		0	
27	StagePercsETO	0	0	This sheet contains no formulas		0	
28	FlowPercsS65	0	0	This sheet contains no formulas		0	
29	FlowPercsS61	0	0	This sheet contains no formulas		0	
30	FlowPercsS59	0	0	This sheet contains no formulas		0	
31	WatBuds	16	9			2,256	5
32	WS_Table	27	9			999	5
33	S65VolComp	32	12			361	4
34	OverlayKCH	7	1			32	
35	OverlayTOH	7	1			29	
36	OverlayETO	7	1			29	

2

Detailed

Report

16 days, 16 hours and 15 min ago

✓

This report is up-to-date

A

Comments (2.000)

Limit of 2000 reported comments reached

B

Objects (252)

C

Hidden Columns (114) & Narrow Columns (0) / Hidden Rows (114) & Narrow Rows (0)

D

Hyperlinks (3)

E

VBA Code (207 procedures) & (6.792 lines of code)

F

Tables (0)

G

Pivot Tables (0)

H

Charts (61)

No Errors in Chart formulas

29 Chart intersheet formula links

I

Conditional Formats (2)

No Errors in Conditional Format formulas

No Conditional Format intersheet formula links

J

Validation Cells (21)

No Errors in Validation Cell formulas

No Vailidation Cells intersheet formula links

K

Names (1.221)

No Errors in Name formulas

199 Name intersheet formula links

4 General		A General Sheet Information				
Report generated: 16 days, 15 hours and 49 min ago						
Sheet No.	Sheet Name (link)	Sheet type	Sheet visibility	Sheet protection	Sheet is empty	Sheet calculation
✓ This report is up-to-date						
1	GUI	Worksheet	Visible	No	No	On
2	KCHops	Worksheet	Visible	No	No	On
3	TOHops	Worksheet	Visible	No	No	On
4	ETOOps	Worksheet	Visible	No	No	On
5	HMJops	Worksheet	Visible	No	No	On
6	MPJops	Worksheet	Visible	No	No	On
7	ALCops	Worksheet	Visible	No	No	On
8	GENops	Worksheet	Visible	No	No	On
9	KCHsim	Worksheet	Visible	No	No	On
10	TOHsim	Worksheet	Visible	No	No	On
11	ETOsims	Worksheet	Visible	No	No	On
12	HMJws	Worksheet	Visible	No	No	On
13	MPJws	Worksheet	Visible	No	No	On
14	ALCws	Worksheet	Visible	No	No	On
15	GENws	Worksheet	Visible	No	No	On
16	TSplots	Worksheet	Visible	No	No	On
17	Events	Worksheet	Visible	No	No	On
18	MaxStages	Worksheet	Visible	No	No	On
19	StageDur	Chart	Visible	No		
20	FlowDur	Chart	Visible	No		
21	BoxWhiskerStage	Chart	Visible	No		
22	BoxWhiskerFlow	Chart	Visible	No		
23	Data4BWplots	Worksheet	Visible	No	No	On
24	Data4TSplots	Worksheet	Visible	No	No	On
25	StagePercsKCH	Worksheet	Visible	No	No	On
26	StagePercsTOH	Worksheet	Visible	No	No	On
27	StagePercsETO	Worksheet	Visible	No	No	On
28	FlowPercsS65	Worksheet	Visible	No	No	On
29	FlowPercsS61	Worksheet	Visible	No	No	On
30	FlowPercsS59	Worksheet	Visible	No	No	On
31	WatBuds	Worksheet	Visible	No	No	On
32	WS_Table	Worksheet	Visible	No	No	On
33	S65VolComp	Worksheet	Visible	No	No	On
34	OverlayKCH	Worksheet	Visible	No	No	On
35	OverlayTOH	Worksheet	Visible	No	No	On
36	OverlayETO	Worksheet	Visible	No	No	On
37	ALT0	Worksheet	Visible	No	No	On
38	ALT1	Worksheet	Visible	No	No	On
39	ALT2	Worksheet	Visible	No	No	On
40	ALT3	Worksheet	Visible	No	No	On
41	S65targetQseries	Worksheet	Visible	No	No	On
42	StageStoArea	Worksheet	Visible	No	No	On
43	DATAforUKOPS	Worksheet	Visible	No	No	On
44	UKISSforUKOPS	Worksheet	Visible	No	No	On
45	AFETforUKOPS	Worksheet	Visible	No	No	On
46	Notes	Worksheet	Visible	No	No	On

4 General		B Formula Statistics					
Report generated: 16 days, 15 hours and 49 min ago		Unique formulas		Total formulas	Total Constant cells	Total Text cells	
Sheet No.	Sheet Name (link)	Total	Once on sheet				
✓	This report is up-to-date	4,201	3,680	423,492	9,196,437	991,878	
1	GUI	12	12	12	35	71	
2	KCHops	27	3	10,350	2,273	240	
3	TOHops	14	4	3,689	1,738	190	
4	ETOOps	15	3	3,692	1,719	193	
5	HMJops	7	1	2,938	707	56	
6	MPJops	7	1	2,938	691	58	
7	ALCops	8	1	2,948	715	54	
8	GENops	9	3	2,941	721	52	
9	KCHsim	115	34	873	1,069,920	18,188	
10	TOHsim	97	27	36,517	815,650	89,684	
11	ETOsims	102	28	18,664	869,308	107,580	
12	HMJws	23	10	18,039	251,172	107,390	
13	MPJws	25	11	18,047	251,172	125,282	
14	ALCws	22	9	18,031	251,172	89,500	
15	GENws	20	8	18,023	251,172	71,609	
16	TSplots	5	4	52	98	58	
17	Events	58	36	4,101	713,842	133	
18	MaxStages	29	14	266	161,325	38	
19	StageDur						
20	FlowDur						
21	BoxWhiskerStage						
22	BoxWhiskerFlow						
23	Data4BWplots	3,383	3,366	4,766	106	352	
24	Data4TSplots	43	27	143,247	930,683	71,696	
25	StagePercsKCH	2	2	2	16	38	
26	StagePercsTOH	0	0	0	0	24	
27	StagePercsETO	0	0	0	0	24	
28	FlowPercsS65	0	0	0	0	0	
29	FlowPercsS61	0	0	0	0	0	
30	FlowPercsS59	0	0	0	0	0	
31	WatBuds	16	9	2,256	5	50	
32	WS_Table	27	9	999	53	56	
33	S65VolComp	32	12	361	116	18	
34	OverlayKCH	7	1	32	43	63	
35	OverlayTOH	7	1	29	40	61	
36	OverlayETO	7	1	29	40	61	
37	ALT0	5	1	40	737,496	72,613	
38	ALT1	5	1	40	737,496	72,609	
39	ALT2	7	1	48	737,475	72,629	
40	ALT3	9	3	501	737,516	72,590	
41	S65targetQseries	19	4	108,593	55,557	29	
42	StageStoArea	27	23	418	535	50	
43	DATAforUKOPS	4	4	4	257,883	18,331	
44	UKISSforUKOPS	3	3	3	178,973	26	
45	AFETforUKOPS	3	3	3	178,973	27	
46	Notes	0	0	0	1	155	

Appendix D: Peer-Review Reports for the UK-OPS Model

4 General		C Minimum & Maximum Value on sheet			
Report generated: 16 days, 15 hours and 49 min ago					
Sheet No.	Sheet Name (link)	Minimum		Maximum	
		Address (link)	Value	Value	Address (link)
✓ This report is up-to-date					
1	GUI	AP2; AP3; AG7; AD8; P10;	1	329,327.55	AP4
2	KCHops	D51; D52; D53; D54	-2000	414,033.33	N59; N60; N61; N62; N63; N64
3	TOHops	A20; A21	-41639	145,327.31	J59; J60; J61; J62; J63; J64
4	ETOps	A20; A21	-41639	125,794.22	J59; J60; J61; J62; J63; J64
5	HMJops	G25	0	42005	Probably a date value
6	MPJops	G25	0	42005	Probably a date value
7	ALCops	G25	0	42005	Probably a date value
8	GENops	G25; K29; L29	0	42005	Probably a date value
9	KCHsim	AZ6073	-41,118.83	540,083.59	I17096
10	TOHsim	AQ1547	-7,920.37	201,804.28	AR14531; P14532
11	ETOsims	J3145	-6,870.83	145,475.86	I17929
12	HMJws	R8; X10; S11; X11; AA11;	0	41639	Probably a date value
13	MPJws	S8; X10; T11; X11; AA11;	0	41639	Probably a date value
14	ALCws	Q8; X10; R11; X11; AA11;	0	41639	Probably a date value
15	GENws	P8; X10; Q11; X11; AA11;	0	41639	Probably a date value
16	TSplots	BW24; AB26; AD26; AB27;	1	29952	Probably a date value
17	Events	N14555	-509.18	42094	Probably a date value
18	MaxStages	V33; V58	-0.31	41639	Probably a date value
19	StageDur				
20	FlowDur				
21	BoxWhiskerStage				
22	BoxWhiskerFlow				
23	Data4BWplots	P3; Q3; R3; S3; T3; B7; BW	0	12000	P2; S2; T2
24	Data4TSplots	AH12; AH13; AH14; AH15;	0	41639	Probably a date value
25	StagePercsKCH	X26; Y26; X27; Y27; X28; Y	9	24351	Probably a date value
26	StagePercsTOH		Sheet contains no values	Sheet contains no values	
27	StagePercsETO		Sheet contains no values	Sheet contains no values	
28	FlowPercsS65		Sheet contains no values	Sheet contains no values	
29	FlowPercsS61		Sheet contains no values	Sheet contains no values	
30	FlowPercsS59		Sheet contains no values	Sheet contains no values	
31	WatBuds	K50	-2,263.70	23988	Probably a date value
32	WS_Table	B5; C5; D5; E5; F5; G5; H5;	0	2013	A53
33	S65VolComp	K67; K93	0.03	23988	Probably a date value
34	OverlayKCH	AD2; Z4; AC7; AF7; Z12; A	1	1170	AC7; AF7; AC27; AF27
35	OverlayTOH	AD2; Z4; AC5; AD5; AE5; Z	1	1170	AF27
36	OverlayETO	AD2; Z4; AC5; AD5; AE5; Z	1	1170	AF27
37	ALT0	JM43	-2,273.18	43830	Probably a date value
38	ALT1	JM43	-2,263.70	43830	Probably a date value
39	ALT2	JM43	-2,373.70	43830	Probably a date value
40	ALT3	JM44	-2,004.99	43830	Probably a date value
41	S65targetQseries	AA16; AB16; AC16; AD16;	0	41639	Probably a date value
42	StageStoArea	C11; E11; G11; I11; J11; K	0	4,126,219.75	H59
43	DATAforUKOPS	D10; D11; D12; D13; D14;	0	41639	Probably a date value
44	UKISSforUKOPS	C11; G11; I11; C12; G12; I	0	41639	Probably a date value
45	AFETforUKOPS	C11; D11; F11; G11; I11; J	0	41639	Probably a date value
46	Notes	A73	1	1	A73

Appendix D: Peer-Review Reports for the UK-OPS Model

4 General		D Wasted Space					
Report generated: 16 days, 15 hours and 49 min ago							
Sheet No.	Sheet Name (link)	Columns used	Rows used	Last cell with data on sheet (link)	Last cell on sheet (CTRL + END) (link)	Wasted Space	
						Column waste	Row waste
✓ This report is up-to-date						93	483
1	GUI	43	37	AQ37	AQ47	0	10
2	KCHops	118	423	DN423	DN446	0	23
3	TOHops	106	423	DB423	Same as last cell with data	0	0
4	ETOps	106	423	DB423	Same as last cell with data	0	0
5	HMJops	51	423	AY423	Same as last cell with data	0	0
6	MPJops	51	423	AY423	Same as last cell with data	0	0
7	ALCops	51	423	AY423	Same as last cell with data	0	0
8	GENops	51	423	AY423	Same as last cell with data	0	0
9	KCHsim	139	17956	EI17956	FF17956	23	0
10	TOHsim	155	17960	EY17960	Same as last cell with data	0	0
11	ETOsims	155	17956	EY17956	EY17957	0	1
12	HMJws	39	17907	AM17907	Same as last cell with data	0	0
13	MPJws	39	17907	AM17907	Same as last cell with data	0	0
14	ALCws	39	17907	AM17907	Same as last cell with data	0	0
15	GENws	39	17907	AM17907	Same as last cell with data	0	0
16	TSplots	81	77	CC77	Same as last cell with data	0	0
17	Events	63	18117	BK18117	Same as last cell with data	0	0
18	MaxStages	24	17902	X17902	X17905	0	3
19	StageDur						
20	FlowDur						
21	BoxWhiskerStage						
22	BoxWhiskerFlow						
23	Data4BWplots	92	125	CN125	CT125	6	0
24	Data4TSplots	83	17907	CE17907	DA17911	22	4
25	StagePercsKCH	25	40	Y40	Same as last cell with data	0	0
26	StagePercsTOH	25	15	Y15	Y40	0	25
27	StagePercsETO	25	15	Y15	Y40	0	25
28	FlowPercsS65	1	1	A1	Same as last cell with data	0	0
29	FlowPercsS61	1	1	A1	Same as last cell with data	0	0
30	FlowPercsS59	1	1	A1	Same as last cell with data	0	0
31	WatBuds	51	61	AY61	AY68	0	7
32	WS_Table	31	64	AE64	Same as last cell with data	0	0
33	S65VolComp	15	97	O97	Q97	2	0
34	OverlayKCH	33	35	AG35	Same as last cell with data	0	0
35	OverlayTOH	33	35	AG35	Same as last cell with data	0	0
36	OverlayETO	33	35	AG35	Same as last cell with data	0	0
37	ALT0	413	17904	OW17904	Same as last cell with data	0	0
38	ALT1	413	17904	OW17904	Same as last cell with data	0	0
39	ALT2	413	17904	OW17904	OW17927	0	23
40	ALT3	413	17937	OW17937	Same as last cell with data	0	0
41	S65targetQseries	31	17917	AE17917	Same as last cell with data	0	0
42	StageStoArea	19	59	S59	Same as last cell with data	0	0
43	DATAforUKOPS	23	17911	W17911	W18273	0	362
44	UKISSforUKOPS	10	17911	J17911	T17911	10	0
45	AFETforUKOPS	10	17911	J17911	O17911	5	0
46	Notes	2	116	B116	AA116	25	0

4303

4304

4305

APPENDIX E: 2009 PEER-REVIEW REPORT

DRAFT

**Scientific Peer Review of the Draft Technical Document
to Support Water Reservations for the Kissimmee River
and Chain of Lakes**

By:

Derek Aday, Ph.D.
Department of Biology
North Carolina State University
Raleigh, North Carolina

J. David Allan, Ph.D.
School of Natural resources and Environment
University of Michigan
Ann Arbor Michigan

Barbara L. Bedford, Ph.D.
Department of Natural Resources
Cornell University
Ithaca, New York

Michael W. Collopy, Ph.D.
Academy for the Environment
University of Nevada, Reno
Reno, Nevada

Robert Prucha, Ph.D., P.E.
Integrated Hydro Systems, LLC
Boulder, Colorado

To:

South Florida Water Management District
3301 Gun Club Road
PO Box 24680
West Palm Beach, FL 33416-4680

Date:

April 17, 2009

TABLE OF CONTENTS

EXECUTIVE SUMMARY	3
INTRODUCTION	5
PEER REVIEW COMMENTS	5
OVERALL FINDINGS AND RECOMMENDATIONS	19
APPENDICES	21
a. Peer Panel Statement of Work	
b. Restoration Expectations for the Kissimmee River Restoration Project	

EXECUTIVE SUMMARY

The South Florida Water Management District (SFWMD) is undertaking the reservation of water for the Kissimmee River and the Kissimmee Chain of Lakes. A water reservation is a legal mechanism to set aside water for the protection of fish and wildlife or the public health and safety from consumptive water use. The reservation is composed of a quantification of the water to be protected, which includes both seasonal and location components for the protection of fish and wildlife in the Kissimmee River and the Kissimmee Chain of Lakes. Eight specific water bodies are the subject of the proposed water reservations, including the Kissimmee River and its floodplain (treated as a single reservation water body), and seven Chain of Lakes Reservation Water Bodies (Myrtle-Preston-Joel, Hart-Mary Jane, East Tohopekaliga, Tohopekaliga, Alligator Chain of Lakes, Gentry, and Kissimmee-Cypress-Hatchineha).

The “*Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes*”, which the Peer Panel reviewed, describes the technical information used by SFWMD to establish the relationship between lake and river hydrology and its associated effects on fish and wildlife. The peer review was conducted in support of the SFWMD rule development process for establishing eight water reservations in the Kissimmee basin. The Peer Review Panel was charged with determining if the technical information contained within the technical document and other supporting documents, can be used as a scientific basis for quantifying water needed for the protection of fish and wildlife.

The Peer Review Panel determined that the supporting data and information used to develop the draft *Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes* are technically sound and the inferences and assumptions made regarding the linkages between hydrology and the protection of fish and wildlife are based upon sound scientific information. Hydrologic models and analyses are well developed and documented, and the AFET-W model appears to reproduce observed surface and groundwater flow conditions satisfactorily for their intended application in developing performance measure hydrographs, which represent the annual pattern of water levels to protect fish and wildlife. The document uses appropriate hydrologic performance measures and supports their use with a thorough understanding of current scientific knowledge of wetland hydrology as related to fish and wildlife requirements, and with appropriate empirical observations and data where available.

The relationship between water levels and the condition of the broadleaf marsh, for the Kissimmee River and floodplain, and the pattern and extent of littoral zone inundation, for the Kissimmee Chain of Lakes, are well developed and these aquatic plant communities serve as suitable indicators for the protection of fish and wildlife. The Panel noted that considerable data are available on other taxa, especially fish and birds, facilitating the use of performance measures in hydrograph development and setting expectations for fish and wildlife responses. However, less information is available for the Chain of Lakes than for the Kissimmee River and its floodplain.

The Panel finds that the range in acceptability associated with reducing the seasonal low from the 90th to the 50th percentile would provide equivalent protection of fish and wildlife in the majority of water reservations, with the exception of the Kissimmee-Cyprus-Hatchineha, where reduction to the 50th percentile would result in an excessive decline in littoral zone inundation and thus reduction in protection of fish and wildlife.

The Peer Review Panel recommends that future efforts be directed at explicitly quantifying the link between hydrologic performance measures and fish and wildlife protection. These data can be used to provide direct support for the assertion that broadleaf marsh is a reasonable surrogate for the link between hydrology and fish and wildlife protection. In addition, more attention to the wet prairie may be of value as an indicator of hydroperiod restoration at the upper extent of the floodplain. Further development of environmental indicators as well as greater monitoring would be helpful for the Kissimmee Chain of Lakes. Continuing to monitor the littoral zone, as well as wading birds and species of conservation concern, is appropriate, and, if feasible, monitoring of the fish species assemblage as an indicator should receive greater effort. The Peer Review Panel believes that the margin of error associated with the estimation of flow and stage can be combined with the range of acceptability associated with the biologic performance measures to show that the hydrologic uncertainty is small compared to the range of acceptability associated with biologic performance measures. The Panel recommends that SFWMD undertakes this exercise, but cautions that the results should be interpreted as relative rather than absolute measures of uncertainty. Finally, the Panel suggests expanding the conclusions section on page 7-51 to more explicitly summarize findings with respect to water needed for protection of fish and wildlife.

INTRODUCTION

Regulatory Overview

The South Florida Water Management District (SFWMD)'s Governing Board authorized the development of rules for the reservation of water to protect fish and wildlife in the Kissimmee River, its floodplain, and the Kissimmee Chain of Lakes in June 2008. A water reservation is a legal mechanism (Section 373.223(4), Florida Statutes) to set aside water for the protection of fish and wildlife or the public health and safety from consumptive water use. The reservation is composed of a quantification of the water to be protected, which includes a seasonal and a location component. Eight specific water bodies are the subject of the proposed water reservations, including the Kissimmee River and its floodplain (treated as a single reservation water body), and seven Chain of Lakes Reservation Water Bodies (Myrtle-Preston-Joel, Hart-Mary Jane, East Tohopekaliga, Tohopekaliga, Alligator Chain of Lakes, Gentry, and Kissimmee-Cypress-Hatchineha).

In response, the SFWMD has produced a draft *Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes*. The technical information and recommendations in this document serve as the basis for the quantification of water, as well as its seasonal distribution and location, for the protection of fish and wildlife that will be adopted through the rulemaking process.

The SFWMD's Governing Board has determined that peer review of proposed reservations is, as a matter of policy, a preferred step in developing water reservation rules. Accordingly, this peer review report summarized the panel's evaluation of the scientific and technical adequacy of the *Technical Document*.

Project Background

The Reservation Water Bodies in the Kissimmee Basin are located in central Florida just south of Orlando and extending to the Kissimmee River's confluence with Lake Okeechobee. The Upper Basin consists of the Kissimmee Chain of Lakes (KCOL) including Lake Kissimmee, all interconnected today by canals with nine water control structures that regulate flow. The Kissimmee River and its floodplain extend from Lake Kissimmee to Lake Okeechobee and, like the Upper Basin, have been highly altered since 1954 by the Central and South Florida Flood Control Project authorized by Congress in 1949. Between 1962 and 1972 the entire river was channelized, greatly increasing its depth and width and reducing its length from 103 to 56 miles. These changes essentially eliminated the historic flooding patterns that had created and maintained the fish and wildlife habitat of its floodplain. Restoration began in the early 1990s, and by 2001 Phase 1 was completed with the backfill of 7.5 miles of canal. In association with this restoration activity, extensive data on 25 ecological performance measures have been collected by the District under the Kissimmee River Restoration Evaluation Program (KRREP), including data on hydrology, vegetation, other biological variables, and various physical and chemical factors.

Purpose

The purpose of this peer review is to determine if the technical information contained in the draft report (*Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes*) is based on the best available information and can be used as a scientific basis for quantifying water needed for the protection of fish and wildlife within the eight water reservation water bodies. For the purposes of this peer review, water for protection of fish and wildlife means water for “ensuring a healthy and sustainable, native fish and wildlife community; one that can remain healthy and viable through natural cycles of drought, flood, and population variation” (Association of Florida Developers v. Department of Environmental Protection, Case No. 04-0880RP, Final Order at 17). The fish and wildlife for which a water reservation may be established are existing native communities of fish and wildlife that would use the habitat in its restored state.

The *Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes*, which this Peer Review Panel reviewed, summarizes the technical and scientific data, assumptions, models, and methodology used to support rule development to reserve water for the protection of fish and wildlife for specific water bodies located in the Kissimmee Basin. The information contained in this document includes: 1) an introduction to its purpose; 2) an explanation of water reservations; 3) identification and description of the reservation water bodies; 4) fish and wildlife resources, hydrologic requirements, and performance measures for the Kissimmee River and its floodplain; 5) fish and wildlife resources, hydrologic requirements, and performance measures for the Kissimmee Chain of Lakes; 6) hydrologic modeling for the Kissimmee Basin; and 7) quantification of water for the protection of fish and wildlife. In sum, this document describes the quantification of water, as well as its seasonality and location, to be reserved under state law in the Kissimmee Basin.

The Statement of Work is attached as Appendix A.

Peer Review Panel

The Peer Review Panel was composed of five scientists with backgrounds that complemented the scientific and technical subject areas and analyses that were relevant to rule development to reserve water for the protection of fish and wildlife in specific water bodies located in the Kissimmee Basin. The panel members were: J. David Allan, Ph.D. panel chair, (aquatic ecologist with expertise in ecological assessment and restoration); D. Derek Aday, Ph.D. (aquatic ecologist with expertise in fish ecology and fisheries biology); Barbara L. Bedford, Ph.D. (wetland ecologist with expertise in plant ecology, hydrology, and biogeochemistry), Michael W. Collopy, Ph.D. (wildlife biologist with expertise in avian ecology); and Robert Prucha Ph.D., P.E., (water resources engineer and hydrogeologist with expertise in integrated hydrologic modeling).

The Peer Review Panel conducted all of its work according to the terms of the Florida sunshine law. All meetings and communications among panelists were held at a noticed

open meeting or through the SFWMD WebBoard, which is available for public viewing at <http://webboard.sfwmd.gov>. The Panel participated in aerial and ground tours of the Kissimmee River and Chain of Lakes. Public deliberations among panel members and District scientists encompassed one and a half days, which was followed by the preparation of this peer review report.

This peer review was conducted in support of the SFWMD rule development process for establishing eight specific water reservations for the Kissimmee River and Kissimmee Chain of Lakes. The Peer Review Panel was charged with determining if the technical information contained within the *Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes* and other supporting documents can be used as a scientific basis for quantifying water needed for the protection of fish and wildlife.

The Panel focused its review on the information contained in the draft *Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes* prepared by the SFWMD, which describes the methods used to support the water reservation rules for the eight water bodies. The Panel was also provided supplemental technical documents (viewable on the WebBoard) to facilitate making an assessment of whether best currently available technical information supports the relationship between the recommended water reservations and the anticipated fish and wildlife response. The Panel also requested that additional information, which was met by the SFWMD in a timely manner, be provided in response to the Panel's concerns.

PEER REVIEW COMMENTS

Panel Response to SFWMD Technical Questions

1. Do the environmental indicators selected provide the basis for protecting fish and wildlife in terms of ensuring sustainable native communities through natural cycles of drought, flood, and population variation?

Findings:

Kissimmee River and floodplain: For the Kissimmee River, the Technical Document summarizes extensive information for multiple components of the ecosystem, including vegetation and all vertebrate groups, indicating broad and thorough coverage of important environmental indicators. Three types of emergent herbaceous marsh (broadleaf marsh, wet prairie, and wetland shrub) are primary indicators of floodplain conditions, with particular emphasis on broadleaf marsh. Vegetation mapping over time and in combination with elevation and hydroperiod data provide a strong basis for monitoring vegetation. The Panel agreed that, given existing data, these are suitable indicators and also reasonable proxies for other fish and wildlife. However, the committee noted that a stronger empirical basis for tying fish to emergent vegetation should be acquired. Fish of the Kissimmee River also are a key environmental indicator both as an important biological assemblage and as a food supply for reptiles, birds, and mammals, and monitoring of the fish assemblage is extensive. Amphibians and reptiles appear less well known, as do mammals, whereas birds are better studied, particularly species of conservation concern and wading birds, both of which are appropriate. In the less well known groups, however, species lists and literature review adequately convey existing knowledge.

In response to reviewer questions, the District made available “Restoration Expectations for the Kissimmee River Restoration Project” (Appendix B). The specific expectations listed for plant communities, aquatic invertebrates, amphibians and reptiles, fish, and birds provide specific examples of indicators (e.g., wetland plant communities will cover > 80% of restored floodplain; fish targets at < 1% for bowfin, <3% for Florida gar, > 58% for centrarchids; long-legged wading birds > 30.6 km⁻² on the restored floodplain). These are excellent indicators as well as specific expectations of success.

Kissimmee Chain of Lakes: Less specific information is available on which to identify environmental indicators for the seven water bodies of the KCOL under consideration. In the case of these water bodies, given the control of lake levels under the existing USACOE regulation schedule, this committee understood the goal to be maintaining the current characteristics of the lakes without further degradation, at least until the new regulation schedule is released by the USACOE. These characteristics have developed since the 1960s when the current regulation schedule was put in place, and reflect the diminished lake level fluctuations relative to those that occurred prior to regulation. The littoral vegetation that has developed under regulation is the key environmental indicator being used in this rule development. Vegetation is classified into seven categories, which differ in their representation among the seven lakes as a function of each lake’s

bathymetry. Although the Technical Document does not provide a great deal of guidance on how to evaluate each vegetation category, the committee's sense is that maintaining the extent of submerged aquatic vegetation and total littoral zone area, and limiting the presence of the invasive species, *Hydrilla verticillata*, are of particular importance. Given that the regulation schedule is set by the USACOE and not by the District, this approach is reasonable until the new schedule is determined. The fish assemblage contains species that are valuable from a recreational fishery standpoint, and there is adequate information on species composition, including trophic and habitat categorization and spawning season for many species based on the literature. Species lists are available for amphibians, reptiles, and mammals. Birds are better known, including the wading bird assemblage and three species of conservation concern (Everglades Snail Kite, Florida Sandhill Crane, and American Bald Eagle).

In summary, the Panel finds that the Technical Document uses appropriate environmental indicators to provide the basis for protecting fish and wildlife. For both the River and the KCOL, multiple indicators are included, giving assurance that the broad needs of the ecosystem are met.

Recommendations:

It would be useful to have a table of indicators so that all are readily accessible. This would allow reviewers to offer more specific advice regarding development of potential metrics or additional indicators.

More attention to the wet prairie may be of value as an indicator of hydroperiod restoration at the upper extent of the floodplain.

A stronger empirical basis for tying fish to emergent vegetation should be acquired.

2: Are there any major environmental indicators not considered in our analysis that could significantly affect the quantity, timing, and distribution of water identified for protection of fish and wildlife?

Findings: The Panel agrees that the environmental indicators selected by District staff are entirely reasonable from a scientific perspective given current scientific understanding and data. As far as the panel could determine, no data exist that would indicate that any major additional indicators would affect the quantity, timing, and distribution of water identified for protection of fish and wildlife. The selected indicators are based on sound and extensive scientific knowledge of the systems at issue. However, an explicit list of the indicators in table format would make it easier for reviewers to determine if other indicators might be appropriate as more information about the systems becomes available.

Kissimmee River and floodplain: In the panel discussion with scientists from the SFWMD on day one, it was apparent that studies of the Kissimmee River associated with the restoration work provided a wealth of data, and that these studies were carried out in a highly professional manner. The Peer Review Panel did not find any significant

shortcomings in the selection of environmental indicators for the purpose of establishing water needed to protect fish and wildlife. There may be groups that should be monitored to develop additional baseline data and insight into system function, and there may be computational approaches using existing data that provide greater insight into the response of targets. These suggestions will appear under recommendations associated with other questions, especially Question 9.

Kissimmee Chain Of Lakes: Because the KCOL are less intensively monitored than the River, additional monitoring of fish and wildlife populations, which based on information presented to the Panel does not appear to be extensive, could be considered in future work.

Recommendations:

Further development of environmental indicators as well as greater monitoring would be helpful for the KCOL. Continuing to monitor the littoral zone, as well as wading birds and species of conservation concern is appropriate, and, if feasible, use of the fish assemblage as an indicator should receive greater effort (see Question 9). A detailed table of indicators would be useful for scientists and policy makers interested in monitoring the success of these water reservations.

3A. Do the performance measures adequately represent the hydrologic requirements of fish and wildlife identified for protection?

Findings: Insofar as the District used the best scientific information, empirical data, and modeling tools available, and was operating under three identified constraints on the water available for the system, this committee thinks that the performance measures selected do adequately represent the hydrologic requirements of fish and wildlife identified for protection. Those three constraints (p. 1-8) are: (1) the existing Kissimmee Chain of Lakes (KCOL) regulations schedule set by the USACOE, which narrowed the range of water level fluctuations in the lakes and thereby reduced the quantity and quality of habitat for fish and wildlife; (2) the Headwaters Revitalization Regulation schedule for Lakes Kissimmee, Cypress, and Hatchineha; and (3) fully restoring the Kissimmee River and floodplain. These constraints impose limitations on restoring historic water flows, water level fluctuations, and seasonal and inter-annual variation to the KCOL. In addition, until more of the Kissimmee River restoration is completed, the USACOE cannot fully implement the Headwaters Revitalization schedule or restore historic hydrologic patterns to the Kissimmee River and its floodplain. The document clearly is based on understanding those three constraints and on sound conceptual understanding of the systems of concern, as well as on an impressive amount of empirical observations and data.

The document shows a sophisticated understanding of wetland hydrology in explicitly recognizing the various components of wetland hydrology – magnitude of flow, rates of change of flow and water levels, timing (seasonality) of flows and levels with respect to

biota of concern, and duration and frequency of flows and levels. The document also recognizes that all of these components must be addressed in order to maintain, in the case of the KCOL, and restore, in the case of the Kissimmee River and its floodplain, the natural dynamic (spatially and temporally) mosaic of wetland communities in these systems and the fish and wildlife they support. District staff have used the best available scientific understanding and data on the linkages between hydrologic characteristics and specific organisms or groups of organisms (e.g., plant communities, fish communities, species of special concern). Their emphasis on flows, timing, and recession rates is appropriate.

3B. Do the ‘range of acceptability’ values proposed provide equivalent levels of protection for fish and wildlife?

Findings: There was considerable discussion among panel members about use of the word ‘equivalent’, particularly within the context of the headwater lakes portion of the Kissimmee Chain of Lakes (KCOL). There was strong general agreement that the range of acceptability values proposed in the technical document would, indeed, provide equivalent and adequate protection for fish and wildlife in the Kissimmee River (KR). In this case, performance measures included KR Flow (R-01), KR Stage Hydrograph/Floodplain Hydroperiod (R-02), and KR Stage Recession/Ascension (R-03). The target values and boundaries presented for these performance measures are clearly based upon sound scientific information and reasonable hydrologic assumptions. The link between hydrology and broadleaf marsh is particularly well supported; the link between broadleaf marsh and fish and wildlife protection is intuitive and conceptually sound, if somewhat lacking in empirical support. District biologists have a strong dataset on the Kissimmee River resulting from the restoration project and evaluation program, and the performance measures for quantification of fish and wildlife needs have already been externally reviewed. As such, the Panel is in full agreement that the range of acceptability values for the Kissimmee River provide equivalent levels of protection for fish and wildlife.

Panel members also agreed that the range of acceptability values in the Kissimmee Chain of Lakes provide equivalent levels of protection for fish and wildlife, with one caveat. The focus of KCOL analyses was ‘performance measure hydrographs’ for the seven reservation water bodies. The range of acceptability values come from sensitivity analyses associated with lowering the seasonal low of the performance measure hydrograph from the 90th to the 50th percentile of water levels on May 31 (based on historical data). To this end, the analyses considered important metrics such as recession and ascension rate, reduction in lake area and volume, and littoral zone inundation. Remarkably, reducing the seasonal low from the 90th to the 50th percentile resulted in little change in these systems, and the Panel expressed broad agreement that the range in acceptability values would provide equivalent protection of fish and wildlife. The notable exception was associated with Kissimmee-Cyprus-Hatchineha, where dropping the seasonal lows would result in a 1.7-foot decrease in water level. Of particular concern among panel members was the resulting drop in littoral zone inundation; at the 90th

percentile, 90% of the littoral zone would remain inundated, whereas only 41% would remain inundated if the seasonal low was dropped to the 50th percentile. This is a significant change in littoral habitat for a system that already has the lowest percent littoral area (22%) of the reservation lakes (Table 5-10). Given the importance of littoral habitat to fish and wildlife (fish and vegetation, in particular), in the case of Kishimnee-Cyprus-Hatcheniha the Panel disagrees with the assertion that the range of acceptability values provides equivalent protection of fish and wildlife. With that caveat in mind, the Panel expressed agreement that the performance characteristics were based on sound science and reasonable assumptions, and that the range of acceptability values were reasonable and acceptable given the ecology and hydrology of the KCOL.

Recommendations:

Continued monitoring of the fish and wildlife communities in the KR and the KCOL is recommended. The Panel also recommends that data to better establish the link between fish and wildlife protection and hydrology be collected and evaluated. See also response to Question 9.

4. Are the hydrologic methodologies, models, analyses, and assumptions sufficiently supported by available scientific knowledge, research and data?

Findings: Hydrologic analyses conducted in this study relied largely on the use of a model developed using the fully integrated, physically-based hydrologic code referred to as MIKE SHE/MIKE 11. This code simulates all of the natural primary hydrologic processes that occur within the Kishimnee Basin using standard physically-based equations and allows flexible coupling between these processes, including fully-hydrodynamic channelized flow, two-dimensional overland flow, unsaturated zone flow, evapotranspiration and three-dimensional saturated zone flows. Model simulations are driven by external boundary conditions, such as rainfall and RET, and MIKE SHE allows significant flexibility in specifying input to the spatial and temporal input of this information. In fact, most parameters within the model can be specified as spatially variable. This code represents a valid tool for use in this analysis.

The AFET-W fully-integrated MIKE SHE/MIKE 11 model and the KRFHM floodplain hydraulic model (MIKE 11 model) as developed for this study are sufficiently supported by available scientific knowledge, research, and data. This report does not detail the considerable effort involved in preparing the earlier AFET model, but does provide appropriate references to this information. The AFET-W model represents a highly parameterized hydrologic flow model, which can increase the non-uniqueness of the solution. However, in most instances a physical basis for the parameter values and their distribution has been provided and thoroughly documented. In addition, the coupling of the various processes, such as channel or overland flow with unsaturated and saturated flows, provide considerable additional constraints on the parameterization compared to simulating flows using single-process codes.

The use of a spatially-variable RET time series in the AFET-W model and quantitative calibration to available groundwater data represent an improvement over the previous AFET model. Details of this calibration were somewhat limited in this report, but review of the AFET-W model calibration report (*Earth Tech, 2008. AFET-W Calibration Report KCOL Surface Water Supply Availability Study*) showed calibration of surface and groundwater improved over the AFET model. Limitations of the model, for example the limited number of groundwater wells in the southern model area, are well documented in this report.

5. Do the hydrologic methodologies, models, analyses and assumptions described in the report yield sufficiently accurate results to reasonably support their applications as described in the report?

Findings: The AFET-W model is used as the primary hydrologic tool for analysis in this study. It is used to simulate “with project” base condition surface water stages and flows, and lateral inflows. It is also used to generate upper- and lower-river target time series of stages and flows.

The degree to which the AFET-W model reproduces observed surface water flows and stages and groundwater levels throughout the basin provides an indication of the accuracy of simulated results for the “with project” base conditions. This model error appears to be small enough to reasonably support intended applications (Section 7). The AFET-W model meets most of the pre-defined calibration criteria for surface and groundwater (pages 6-9) as shown on Tables 6-1 to 6-3, though the model will never be able to exactly reproduce observed data due to error from a variety of sources. For example, some degree of error is expected in the measurement of input data such as rainfall or RET, in the conceptual or structural model framework (i.e., aquifer configuration, simplification of surface drainage, etc.), and in defining appropriate parameter values, most of which are spatially variable. Despite this inability to exactly reproduce observed system response, the AFET-W model appears to reproduce observed surface and groundwater flow conditions well enough for the intended application.

Uncertainty within the hydrologic modeling community is generally believed to be derived from three key areas; parameter, conceptual or structural, and data. Despite the increased uncertainty due to parameterization in the AFET-W model, most of the parameter values are physically based and carefully prepared and documented, and the benefit of using a model that incorporates all of the major hydrological processes is believed to greatly outweigh the inability to fully assess the model uncertainty. Plots showing the model margin of error (Figures 6-44 to 6-51) appear to be reasonable estimates of the predicted hydrologic modeling error associated with flow and stage.

Recommendations:

Revise the Draft Technical Document to discuss how the results of the margin of error, or model prediction uncertainty, will be used in Section 7.

6. Can/should the margin of error associated with the estimation of flow and stage as defined in this report be combined with the range of acceptability associated with the biologic performance measures, for the purpose of describing to policy makers boundaries within which they are equally sure (or unsure) that the desired protection of fish and wildlife will be achieved?

Findings: The margin of error associated with simulated flow and stages in the Kissimmee River and the Chain of Lakes can and should be used to assess the impact of modeling uncertainty on the estimated volume of water required for protection of fish and wildlife. This would provide greater confidence (and transparency) that the reported targets/thresholds will protect fish and wildlife, at least within the range of hydrologic model uncertainty. It would also be useful to show that conclusions reached in this report will not be significantly affected by results of hydrologic analysis. Finally, it would validate the use of the AFET-W model in this type of application.

Recommendations:

The Peer Review Panel believes that the calibrated AFET-W model margin of error can be incorporated into final target time series relatively easily and with the information already provided in the report. For example, the margin of error calculated as upper and lower bounds around predicted “with project” stages on the duration curves for various structures (i.e., Figures 6-44 through 6-51, on pages 6-78 to 6-81) could be translated onto the lake and river target time series plots prepared in either the Preliminary Analysis Section 7 (i.e., Figures 7-23 to 7-29 for lakes, and Figures 7-30 to 7-34 for river). Additional upper-lower bounds may have to be generated for some of these figures. Because the Detailed Analysis accounts for the timing of events and yields more water, an effort should also be made to show how tables like 7-10 would change. The margins of error were calculated on a monthly basis to avoid the short-term daily offsets in flow and stage. Either daily or monthly average errors could be used to revise the estimates given in Table 7-10.

7. Are the methodologies used to develop the Target Time Series for the river and for the lakes scientifically and technically valid, given the constraints of the initial reservation?

Findings: The methodologies used appear to be valid, given the constraints of the initial reservation (i.e., existing KCOL operating schedule in the upper basin, the Headwater Revitalization Project in the headwaters of the Kissimmee, and a fully-restored Kissimmee River).

The steps for developing the lake target time series are relatively straightforward, in that the seasonal high stage was related to the high pool regulatory stage for each reservation water body, thereby protecting all of the fish and wildlife habitat possible. A range of seasonal lows was also developed for each water body, using upper and lower threshold

values (90th and 50th percentile, respectively). Stage hydrographs were used to show the range of water required for the protection of fish and wildlife. In three of the reservation water bodies, species- or taxa-specific requirements were used to create a third stage in the hydrograph. These modifications were inserted to accommodate specific hydrologic needs during the nesting season of wading birds at Bird Island Rookery (at Lakes Hart and Mary Jane) and apple snails at Lakes Tohopekaliga and Kissimmee, Cypress and Hatchineha. These modifications appear to sufficiently adjust the recession rates to accommodate the life history requirements of these particular species.

In contrast, the steps for the Kissimmee River are more complex and somewhat difficult to follow. However, after reviewing two additional documents provided by SFWMD on how upper and lower targets for the Kissimmee River were determined, the Panel agreed that, while the methodology had many steps, it was well documented.

Given the importance of developing a reasonable target time series that meets performance measures R-1 to R-3, it seems unclear what sort of error is associated with the final set of Kissimmee River target time series. In other words, because the target time series are hypothetical and non-unique, if a starting point other than the “with project” base conditions time series was used with the “trial and error” methodology, how different would the resulting upper and lower target time series be from those estimated in this report, if at all? This could be clarified in the report. Part of this may be due to the difficulty following the series of steps.

It seems unclear why a preliminary and more detailed method is presented in Section 7, when the results of detailed analysis point out that the preliminary method doesn’t consider timing of events, and more water appears available if daily timing is considered.

Recommendations:

Given the “trial and error” methodology used to develop upper and lower target time series for the Kissimmee River, it would be helpful to clarify why using starting conditions other than the “with Project” base conditions would not produce significantly different results.

The report should clarify why upper and lower targets are defined using a different set of performance measure components.

The report should clearly indicate which set of results (preliminary or detailed analysis) decision-makers should rely on to define the water needed for protection of fish and wildlife. For example, in the case of the lakes, the detailed analysis (Table 7-10) shows considerably more water available than the preliminary analysis (Table 7-9). If results from the more detailed analysis are more realistic and accurate, the discussion of the preliminary analysis should be removed to avoid possible confusion.

8. Is the water identified for the protection of fish and wildlife technically supported for each of the eight reservation water bodies?

Findings: The document clearly distinguishes the water needs of the eight reservation water bodies and appropriately identifies them given the identified constraints (see 3A above). As discussed under Question 3A, the document uses appropriate hydrologic performance measures and supports their use with a thorough understanding of current scientific knowledge of wetland hydrology as related to fish and wildlife requirements, and with appropriate empirical observations and data where available. The modeling tools used appear to be at the cutting edge of current modeling practice and extend the available knowledge by integrating the hydrology of the several water bodies, where appropriate, to obtain a more thorough picture of the entire Kissimmee system. Furthermore, the modeling tools used have been developed in such a way that they can be adapted as the USACOE adopts new water regulation schedules and the Kissimmee restoration is completed.

9. What additional work, if any, should be considered to enhance the technical criteria for future updates of these water reservations?

Recommendations:

The Panel was impressed with the clarity and comprehensiveness of the technical document and there was broad agreement that the science linking hydrology to vegetation characteristics (especially broadleaf marsh) was particularly strong. Furthermore, current scientific understanding and data would support the assumption by District staff that vegetation is a strong surrogate for “habitat quality” for fish and wildlife. The Panel strongly suggested, however, that future effort be directed at explicitly quantifying the link between fish and wildlife and hydrology. These data can be used to provide direct support for the assertion (widespread in the technical document) that broadleaf marsh is a reasonable surrogate for the link between hydrology and fish and wildlife protection. To that end, there are many acceptable ways to collect and analyze relevant data. Among these, the Panel suggests the following: 1) continuous vegetation monitoring in the Kissimmee River; 2) continued data collection on the specific species (e.g., wading birds, apple snails) that were used to modify target time series in the KCOL; 3) selection and monitoring of specific fish and wildlife indicator species in the Kissimmee River and KCOL to ensure that project goals associated with protection of fish and wildlife are being met; and 4) continued monitoring of species composition for fish and wildlife in the Kissimmee River and KCOL. From these data collections, metrics that track populations (e.g., size, age structure, etc.) and communities (e.g., relative abundance, species evenness and richness, beta diversity, etc.) can be calculated through time to ensure ongoing protection of fish and wildlife in the Kissimmee River and KCOL. The Panel suggests that, if possible, additional data collections be focused specifically on amphibians. However, the Panel recognizes significant constraints associated with collecting those data.

The Panel also recommends that hydrologic uncertainty in the “with Project” base condition simulations be incorporated into the detailed target time series in Section 7. Doing so should demonstrate that even with the hydrologic uncertainty noted on Figures 6-44 to 6-51, conclusions related to the amount of water available above target time series will not change significantly.

10. Does the compiled information, including data, analyses, assumptions, and literature review, provide a reasonable basis for the conclusions reached about the water needed to protect fish and wildlife for each of the eight reservation water bodies?

The Panel is in unanimous agreement that the compiled information provides a reasonable basis regarding water needed to protect fish and wildlife for each of the eight reservation water bodies. The documentation is extremely comprehensive, well organized, intuitive, and conceptually sound. Ostensibly, the goal of this peer review panel is to identify data gaps or flaws in logic that prevent agreement with conclusions reached by SFWMD scientists. In all instances, however, questions regarding clarification of concept or methodology were readily addressed by District biologists and additional material was provided, when necessary, to support those responses (e.g., supplemental material available through the WebBoard). There was discussion among panel members and District biologists regarding the meaning of “protection of fish and wildlife”, and panelists’ questions were answered and concerns about how to quantify protection were resolved. Additional discussion focused on the use of broadleaf vegetation as a surrogate for the link between hydrology and fish and wildlife protection, and suggestions for strengthening that link are included in Question 9.

The presentation of the technical documentation was thorough and appropriate. However, the Panel does suggest expanding the conclusions section on page 7-51 related to water needed for protection of fish and wildlife. Given that this is the focus of the water reservation, additional detail in this section would be useful to bolster the case that these water reservations provide adequate protection of fish and wildlife, and would aid policymakers that might be less familiar with, or interested in, specific details.

The conclusion section should be very clear on the quantity of water required for protection of fish and wildlife. The discussion of results in Section 7 and the conclusions focus mostly on the amount of water available above that needed for protection of fish and wildlife. Conclusions could be improved by tabularizing the quantities of water needed for protection of fish and wildlife in each of the eight water bodies defined on pages 1-2 combined with estimates of hydrologic modeling uncertainty described in the response to Question 6. In addition, conclusions could also be improved by clarifying which set of analysis results decision-makers should rely on for assessing the amounts of water available above reservation needs. For example, results of the detailed analysis appear more realistic and indicate considerably more water is available than the preliminary analysis. To avoid potential confusion, the report should clearly show decision-makers how to use results of the preliminary and detailed analysis (i.e., tables 7-9 and 7-10). If results of the more detailed analysis are more realistic than results of the

preliminary analysis, the discussion and results of the preliminary analysis could be removed. Finally, Tables 7-9 and 7-10 and Figures 7-23 to 7-34 should also be modified to reflect the approximate range of uncertainty in the “with Project” base condition simulation.

In the technical document, reference is made to the wildlife response already observed along the partially-restored sections of the Kissimmee River. Given the reliance of the overall approach to reestablishing the linkages between hydrology, vegetation, and fish and wildlife, it would be helpful if documentation of these responses could be provided. A useful place to insert relevant data summaries and explanatory text to support these initial observations would be in Technical Report Appendix A (Kissimmee River Restoration Project Background). These preliminary findings would support the statement in the document and provide more detailed information to the reader regarding fish and wildlife responses to restoration that have been documented to date.

OVERALL FINDINGS AND RECOMMENDATIONS

The Peer Review Panel commends the District staff for preparing a report that summarizes a large quantity of data and analyses, produced from many studies, into a document that is coherent and logical in its flow. In addition, the Panel found the site visit invaluable, including the tour of Lake Toho and particularly the helicopter tour of the Kissimmee Chain of Lakes and Kissimmee River. Without this aerial tour it would have been difficult for the panelists to fully comprehend the spatial extent of the combined waterways, their interconnectedness, and the extensive floodplain area of the restored Kissimmee River. The establishment of water reservations for the eight water bodies of the Kissimmee basin is a challenging task due to the complexity of linking hydrology to fish and wildlife resources, as well as the legal, social, and economic constraints of recommending a water resource use strategy for such complex and coupled ecosystems.

The supporting data and information used to develop the draft technical report are technically sound, and the inferences and assumptions made regarding the linkages between hydrology and the protection of fish and wildlife are based upon sound scientific information. The premise of the draft technical report is that the hydrologic requirements of the existing fish and wildlife resources can be expressed as a performance annual hydrograph that represents the annual patterns of water levels needed to protect fish and wildlife for each reservation body. This is accomplished for the Chain of Lakes by specifying seasonal high and low stages, connecting these with ascension and recession events, and adjusting the resulting hydrograph in accord with the specific hydrologic requirements of fish and wildlife in individual lakes. In the case of the Kissimmee River and its floodplain, this is accomplished through the use of flow and stage duration curves at specific water control structures.

Regarding the sufficiency of literature and data supporting the draft technical report, the Panel noted that the data presented was scientifically sound but at times was insufficient to support the various linkages that are critical to establishing that fish and wildlife are adequately protected. The panel agreed that the District utilized the best available scientific knowledge and data to support the various linkages that are critical to establishing that fish and wildlife are protected. However, the panel also recognized that current understanding and data are insufficient for establishing these linkages more directly and for certain taxonomic groups. For example, while the hypotheses and assumptions linking hydrology to the protection of the broadleaf marsh are particularly strong, and a great deal of biological data are available for the Kissimmee River and floodplain, the Panel recommends that further effort be made to establish linkages between broadleaf marsh and fish and wildlife, or between hydrology and fish and wildlife, on an ongoing basis. This could include monitoring of vegetation in the Kissimmee River and its floodplain, of the extent of the littoral zone in the lakes, of specific species (e.g., wading birds, apple snails) that were used to modify target time series in the Chain of Lakes, of specific fish and wildlife indicator species in the Kissimmee River and Chain of Lakes, and of additional fish and wildlife in the

Kissimmee River and Chain of Lakes, including amphibians and reptiles for which information currently is sparse. Appropriate metrics that can be derived from such data include those that track populations (e.g., size, age structure, etc.) and communities (e.g., relative abundance, species evenness and richness, beta diversity, etc.)

Second, the Peer Review Panel believes that the margin of error associated with the estimation of flow and stage can be combined with the range of acceptability associated with the biologic performance measures to show that the hydrologic uncertainty is small compared to the range of acceptability associated with biologic performance measures. The Panel recommends that SFWMD undertakes this exercise, but cautions that the results should be interpreted as relative rather than absolute measures of uncertainty.

Third, the Panel suggests expanding the conclusions section on page 7-51 related to water needed for protection of fish and wildlife. Given that this is the focus of the water reservation, additional detail in this section would be useful to bolster the case that these water reservations provide adequate protection of fish and wildlife, and would aid policymakers that might be less familiar with, or interested in, specific details. The emphasis in the conclusions section should focus more on actual quantification of water needed for protection of fish and wildlife for the eight reservations, rather than on the amount available for other uses. The conclusions should also clearly describe why both preliminary and detailed analyses were conducted and how decision-makers should utilize this information. It was unclear why discussion of the preliminary analysis is needed if the more detailed analysis provides more realistic quantities.

APPENDICES

Peer Panel Statement of Work

Restoration Expectations for the Kissimmee River Restoration Project

APPENDIX A

STATEMENT OF WORK FOR PEER REVIEW OF TECHNICAL DOCUMENTATION TO SUPPORT DEVELOPMENT OF WATER RESERVATIONS FOR THE KISSIMMEE RIVER AND CHAIN OF LAKES

Date: January 29, 2009

Project Name: Kissimmee River Water Reservation

Peer Review Coordinators: Jason Godin and John Zahina, Water Supply Planning
Division Water Supply Department

Project Manager: Lawrence Glenn, Kissimmee Division, Watershed
Management Department

Requesting Offices: Watershed Management and Water Supply Departments

1 Introduction

This request for peer review pertains to the draft project technical report entitled “Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes.” This peer review is being conducted to support the rule development process for establishing a water reservation for the area encompassed by the Kissimmee Basin. The South Florida Water Management District (SFWMD) is a regional water resource protection and management agency with legal authorities identified by state law, specifically Chapter 373 Florida Statutes (F.S.). Pursuant to Section 373.223 F.S., the Governing Board of the SFWMD has directed staff to develop a reservation or allocation of water to protect water identified for the protection of fish and wildlife in the Kissimmee Basin.

The purpose of this peer review is to determine if the technical information contained within the draft technical report based on the best available information and other reference materials can be used as a scientific basis for quantifying water needed for the protection of fish and wildlife. For the purposes of this peer review, water for protection of fish and wildlife means water for “ensuring a healthy and sustainable, native fish and wildlife community; one that can remain healthy and viable through natural cycles of drought, flood, and population variation.” (Association of Florida Community Developers v. Department of Environmental Protection, Case No. 04-0880RP, Final Order at 17). The fish and wildlife for which a water reservation may be set are existing native communities of fish and wildlife that would use the habitat in its restored state.

1.1 Peer Review Overview

The peer review panel shall read the draft technical report and related background information identified in this statement of work, participate in the technical workshop, submit written comments on the draft project technical report, and work with the panel chairperson to develop a final peer review panel. The panel chairperson shall submit a

comprehensive final peer review report to the SFWMD that meets the objectives noted above.

This review will include a response to the SFWMD questions asked of the panel, a summarization as to whether the panel agrees or disagrees with staff's estimation of water needed for protection of fish and wildlife, and recommendation of action to resolve outstanding technical issues. The expert panel is requested to provide specific recommendations to address deficiencies in the information presented in the document. Florida's Government-in-the-Sunshine Law requires that all discussion and interactions related to the peer review are conducted in a publicly accessible format, such that they should only take place at the peer review workshop or through the SFWMD web-board. The panel members shall have no direct or potential conflicts of interest and will comply with Florida Sunshine Laws (see section 1.2).

1.2 Panelist Requirements and Expertise

It is required that each panelist shall have the following skills:

- Expertise in one or more of the following: (1) freshwater wetland / plant ecology, (2) avian ecology, (3) riverine fish ecology, (4) lacustrine fish ecology, (5) hydrologic modeling, or (6) hydrology and hydrogeology linking freshwater flow (surface and groundwater) to ecological resources.
- Effective communication and writing skills
- Availability to dedicate significant time resources during the peer review period
- Availability to participate in the technical workshop
- Ability to conduct an objective and independent scientific review

In addition to the above requirements, the chairperson must also have excellent communication, writing, and report organization skills. Experience chairing peer review panels and consolidating comments from multiple panelists is preferred. It is preferred, but not required, that each panelist have a demonstrated ability to understand the potential impacts to the hydrologic system in the South Florida region from simulated changes in hydrologic conditions, operational guidelines, and management objectives.

The SFWMD has organized the peer review process in accordance with accepted scientific review practices. Care will be taken in selecting the panelists to assure they are independent of the SFWMD. Panelists should have no substantial personal or professional relationship with the SFWMD or any other organization involved in environmental management in Central Florida. The panel can therefore be reasonably assumed to be objective in evaluating materials presented. Such objectivity is the cornerstone of any true independent peer review process. Each panelist shall submit a signed disclosure of potential conflicts of interest and current curriculum vitae.

1.3 Guidelines for Peer Review

All panelists will receive payment for their participation on the panel. The chairperson shall have additional duties and will receive payment accordingly based on an estimate of additional hours for aggregating and reporting panel findings. All panelists shall attend a

one day field trip and 2-day workshop in Orlando, Florida (see Table 1). Once individuals have accepted their position and their contract is executed, they shall begin to review the project technical report and supporting reference materials provided in preparation for their participation in the public workshop. All notes and questions about the technical document from each panelist shall be recorded using the web board following the format in section 4.1.2. The workshop is a venue for panelists to work face-to-face with each other and staff and to ask questions and clarify any items as needed.

The web board serves as a repository to allow panelists to submit their comments on the draft project technical report and to distribute documents such as the peer review report. It also allows the SFWMD to disseminate other relevant information about the review, and it allows the general public to closely follow the development of the review.

Discussions among panelists relating to this peer review shall occur only during the public workshops or through the web board.

Review of the technical documents by individual panel members shall be done independently prior to the public workshop. The panel will interact with one another to formulate a consensus of opinions at the public workshop. During the final workshop session the panel shall collaborate on recommendations and proposed changes to the technical document. The chairperson shall then write a final peer review report incorporating the SFWMD team responses and the panel's conclusions following the workshop.

The panel members will comply with s.286.011, F.S. (ATTACHMENT A) and therefore may not have discussions amongst each other outside the public forum. A publicly accessed web board provided by the SFWMD (Kissimmee River section of the Natural System Technical Document Peer Review Web Board:

<http://webboard.sfwmd.gov/default.asp?boardid=NSTDPR&action=0>) shall provide the only means of communication between panel members outside of a public workshop. The peer review panel web board shall be used by the panelists and the public to post questions to the SFWMD Project Team and to post their work in progress following the format in section 4.1.2. This web board will be conducted in accordance with Florida's 'government in the sunshine' statutes. Panelists are required to read the information on the sunshine laws contained in ATTACHMENT A. Panelists may post materials, but may not respond to, or have discussions with, other members of the panel or have discussions via a liaison. SFWMD staff will provide a set of instructions for using the web board to each panelist.

2 Summary of Time Line and Responsibilities

Table 1: Time Line and Responsibilities

Task/Action	Responsible Party	Deliverable & Due Date for 2009
Execution of Purchase Order	Procurement	
Send Materials to Panelists	SFWMD	March 20, 2009
Task 1a: Acknowledgement of Receipt of Materials	Chairperson and panelists	Within 48 hours of receiving materials
Task 1b: Review of Documentation and Questions for SFWMD	Chairperson and panelists	March 26, 2009
Task 2. Field Excursion and Workshop	Panelists, chairperson and SFWMD team	March 30-April 1, 2009 (3-days)
Task 3: Final Peer Review Report	Chairperson submits report to SFWMD	April 17, 2009

3 Scope of Work

3.1 Duties and Tasks of Panel and Chairperson

During this project, the panelists will complete all tasks listed below.

Duties for Panelists

1. Review and evaluate the technical documentation (e.g., explanation of methods and approach used, tools, data sources, and assumptions)
2. Review all scientific or technical data, methodologies, and models used.
3. Review all scientific and technical analyses. Identify strengths and weaknesses of the analyses.
4. Review and evaluate materials provided to the panel during the course of the peer review process. All materials (excluding reference/background materials) provided up to the final peer review workshop shall be included in the evaluation by the panel.
5. Actively participate in the technical workshop.
6. Respond to the SFWMD questions of the peer panel in ATTACHMENT D.
7. Contribute to the final peer review report.

In addition to the panelist duties described above, the chairperson shall also perform the following duties:

1. Submit a draft workshop agenda. SFWMD will be taking minutes during each day of the workshop.
2. Assign tasks to panelists for completion of various sections the draft peer review report and ensure that they fully understand the requirements for each task.
3. Organize materials from other panelists and submit a draft peer review report and final peer review report. Each panelist shall read and review the materials provided independently, and then the panelists shall collaborate with the chairperson to develop the peer review report during the public workshop and through the web board. The chairperson shall coordinate all the activities and products of the panel. The chairperson shall be the editor of the peer review report and shall compile and reconcile the contributions from the other panelists.
4. Panel concurrence on each topic is recommended but not required. In the event that differences of opinion cannot be reconciled by the chairperson, then they may be reported as such or as minority opinions.

4 Work Breakdown Structure

4.1 Tasks for Panel

4.1.1 Task 1. Receipt of Materials

The technical documentation will be delivered to the panel by March 20th, 2009. The panelists shall acknowledge that they have read the statement of work and agree to the terms therein along with receipt of the following:

1. Documentation entitled, “Technical Document to Support Water Reservations for the Kissimmee River and Chain of Lakes.”
2. Reference materials contained that accompany the draft technical document.

The panelist shall mail (electronic or post office) a signed and dated acknowledgment form (ATTACHMENT B) to the SFWMD once receiving a copy of the technical documentation.

The panelists shall read the statement of work and begin review of the project technical report and supporting reference materials that accompany the draft technical document. The reference materials are provided so the panelists may become familiar with tools, data, or other information that was synthesized in the technical document. The reference material is provided only as informative reference material; it is not under review and is not necessary that it be reviewed. Some of the reference material will be provided in the form of links to PDF files on the SFWMD’s web site, or ftp site, or links to other web sites.

Deliverable 1a: Acknowledge receipt of materials by emailing the SFWMD peer review facilitator

Due Date: 48 hours after receiving materials. A signed form (ATTACHMENT B) should be mailed to the SFWMD peer review facilitator.

4.1.2 Task 1: Questions for SFWMD

The panelists shall provide questions to be considered by the SFWMD team in preparation for the workshop using the classification listed in Table 2. The panelists will develop specific and general questions regarding items in the project technical report and post them on the web board 5 days prior to the public workshop (March 26, 2009).

Table 2: Format for Questions

Major issues for discussion	
Minor issues requiring further clarification	
Typos and editorial comments in documentation	To be provided on electronic copy of documentation
Major strengths	

The panel shall review the project technical report in regards to its approach and review the documentation itself. The panel shall provide comments and recommendations on, but not limited to, the following:

- Format and clarity of the documentation in explanation of technical approach, data sources and assumptions, overall structure, and readability of text, tables, and figures.
- Suitability of analyses for its intended application.
- Capabilities, limitations, and future improvements.
- In areas where the panel identifies deficiencies, specific recommendations to resolve the deficiencies are required to facilitate revision of the documentation.

It is recognized that each member of the panel shall comment most substantively on areas within their primary expertise, but comments are welcome on other appropriate aspects of the technical document. In addition to comments and recommendations, the peer review report shall include responses to the topic questions. The responses by the panel shall be stated in the most unambiguous manner possible. The peer review report shall address the questions that accompany the draft technical document.

Deliverable 1b: A list of initial questions and concerns from each panelist will be posted on the web board 5 days prior to the workshop. For the chairperson only – a categorized list of the single set of outstanding questions from the panel that require written response from the SFWMD team at the last day of the workshop. This list would contain questions that were not fully addressed at the workshop and needed to finalize the peer review report.

Due Date: April 1, 2009 the last day of the peer review workshop

4.1.3 Task 2: Peer Review Field Excursion and Workshop

The peer review workshop will last 2 days after the 1-day field trip. All portions of the 2-day workshop are open to the public. The field excursion will provide a driving and aerial tour of the project areas and is not a public forum. Therefore the panelists shall not discuss the project with each other aside from the public workshop. The workshop shall be held for panelists to discuss their individual findings in their reviews and to work together to reach a consensus on all sections of the peer review report. Up to a one half day portion of the workshop shall be dedicated to incorporating the SFWMD team's responses to the panel questions. The panel shall also consider other comments and clarifications made by the SFWMD team. Time will be allocated for public comments. The final part of the workshop will include an executive panel session. During this time, the chairperson will compile a list of any outstanding questions needed to complete the peer review report and give these questions to the SFWMD team prior to the conclusion of the workshop. At the conclusion of the workshop, a draft peer review report should be nearly completed. The chairperson is responsible for coordinating and delivering the final peer review report. The field excursion will be held prior to public workshops, and will consist of a helicopter flight and van tour of the Kissimmee River Floodplain and adjacent areas. All participating panelists will be required to sign a liability waiver (ATTACHMENT C). Panelists need to plan to be in Osceola County, Florida for a total of three 8-hour working days. The final peer review report is due two weeks after the peer review workshop (April 17, 2009).

The agenda for the workshop will be developed through consultation between the SFWMD and the chairperson. The SFWMD shall post a draft agenda on the web board one week prior to the start of the workshop. Final comments to the agenda shall be posted to the web board no later than two business days prior to the start of the workshop. The agenda will include, at a minimum, the following items:

1. SFWMD presentation including introductions, a brief overview, and meeting logistics
2. Question-and-answer session between the panel and SFWMD team.
3. Review of schedule and logistics for the final peer review report.

4. SFWMD responses to panel questions.
5. Public comment.
6. An executive work session for the panel to discuss and reach consensus on the peer review report. During this time the chairperson should compile a list of any outstanding questions needed to complete the peer review report and give to the SFWMD team prior to the end of the executive work session.

The peer review workshop will be conducted between the hours 8:30AM–5:00PM with up to a one-hour break for lunch each day. Lunch is not provided during the workshop.

Deliverable 2: Panelists will make their own travel arrangements to Orlando, Florida and actively participate in the workshop and field excursion. “Active participation” is defined as adhering to ground rules established by the workshop facilitator and the Florida Sunshine Law, attending all presentations, letting presenters know when any part of the presentation is not understood, be familiar with the SFWMD expectations for the peer review, and be ready to work within the schedule and through the logistics for the peer review. Personal appearance at the workshop is required. No panelist shall be allowed to attend via teleconference.

Due Date: The workshop will be March 31-April 1, 2009.

4.1.4 Task 3: Develop Peer Review Report

The peer review report is the final deliverable of this statement of work. The panel shall work collaboratively during the public workshop and through the web board to produce a report appropriate for a broad audience that includes scientists, stakeholders, and other interested parties. The chairperson shall seek consensus among the panelists. Each panelist is responsible for cooperating with the chairperson in the development of the peer review report.

The chairperson shall be the editor of this report and shall coordinate all the activities of the panel to this end. Panelists shall provide their products to the chairperson in a timely fashion closely following the review schedule provided in this statement of work.

Panelists shall be contributors to the peer review report.

The peer review report shall include an executive summary, which includes the panel’s recommendations. The SFWMD team’s responses to these recommendations shall be included in the peer review report as part of the executive summary. The peer review report shall include responses to topic questions that accompany the draft technical document. The questions posed by the panel in Task 2, at the workshop and from the web board will be answered by the SFWMD team in a question/answer format. All questions will be answered in writing on the web board. The peer review report shall include

minutes taken by the SFWMD from the public workshops as an appendix. The peer review report shall also summarize the key points made during the workshop. A video or audio tape of the meeting will also be made for SFWMD records.

The peer review report will at a minimum include the following sections (section names can be modified):

1. Executive Summary
2. Introduction
3. Panel responses to the questions that will accompany the draft technical document
4. Overall Findings and Recommendations

The peer review report shall use a Microsoft Word template for styles and formatting. Questions regarding the use of the template will be addressed by the peer review coordinators. The peer review report shall display line numbers for each page and display page numbers.

Deliverable 3: Completion and submission of a final report. The report shall be written in Microsoft Word and posted to the web board and emailed to the peer review facilitator.

Due Date: Chairperson shall post on the web-board the final report on or prior to April 17, 2009.

4.2 Duties and Tasks of SFWMD

The technical documentation and internet addresses to background materials will be provided to each panelist by SFWMD staff. SFWMD will perform the following duties, with the responsible person in parenthesis (see Section 8):

1. Prepare the technical documents to be distributed to the panel (technical lead)
2. Post background materials to panelists and provide the project technical report (peer review coordinators)
3. Finalize workshop agenda (peer review coordinators)
4. Handle logistics for the field trip and workshop (peer review coordinators)
5. Take minutes of the workshops and post on web board (peer review coordinators)
6. Respond to panelists' questions and comments at the workshop (technical lead)
7. Establish and monitor web board (peer review coordinators)

8. Review and approve all deliverables associated with this scope of work (all).
9. Staff will provide support to the panel during the workshop. The chairperson should inform SFWMD personnel what technical assistance they anticipate needing prior to the workshop.
10. The SFWMD will electronically record all workshop meetings (peer review coordinators).

The SFWMD agrees to perform its duties within the timeframes of this statement of work.

5 Evaluation Criteria for Acceptance of Deliverables

Task 1a Criteria for the acceptance of the Task 1a deliverable is acknowledgment of receipt of review materials and signing off on scope of work.

Task 1b Criteria for the acceptance of the Task 1b deliverable is the compilation of questions prior to March 20, 2009. The panel's questions, concerns, and information to the SFWMD should reflect thoughtful reading of the documents provided.

Task 2 Criteria for the acceptance of the Task 2 deliverable is active participation in the peer review workshop held March 30-April 1, 2009 (3 days) in Orlando, Florida.

Task 3 Criteria for the acceptance of the Task 3 deliverable will be the submittal of the final peer review report, representing a consensus view of the entire panel. The report shall include all of the sections outlined in this statement of work. The report shall summarize the key points made during the peer review workshop and include constructive steps to be taken to correct any deficiencies identified by the panel. The final peer review report shall respond to all the questions that accompany the draft technical document and to additional questions or issues raised in the workshop. It will also reflect a thoughtful and substantive evaluation of the technical document. The report should be objective in its evaluation and written so that it can be understood by a broad audience.

6 Payment for Services

A summary of deliverables and schedule by task associated with this project are set forth below in Table 3. Each panelist must provide a cost for each item in Table 3. Panelists are responsible for making and paying for their own travel and meal arrangements. Based on the hourly unit rate, the total task cost for each task in Table 3 should be completed. The unit rate shall include the costs incurred for travel, meals, phone calls, overhead, etc. All deliverables submitted hereunder are subject to review and approval by the SFWMD. Upon satisfactory completion of all services required, the panelists will be paid at the specified hourly unit rate that includes all labor and expenses.

The chairperson hereby agrees to provide the SFWMD all deliverables described in the statement of work in Microsoft Word format. Acceptability of all work will be based on the judgment of the SFWMD that the work is technically defensible, accurate, precise, and timely.

After issuance of the purchase orders, payment will be made following receipt and acceptance by the SFWMD of project deliverables in accordance with the schedule set forth below, and after receipt of an invoice. Payment by the SFWMD for all work completed herein will not exceed the TOTAL in the table below. The Panelist should submit invoices to the peer review coordinators for approval upon completion of all the indicated tasks in Table 3.

Table 3: Schedule of Deliverables and Rate Schedule

Task Number	Deliverables	Due Date	Estimated Hours	Unit cost	Task Cost	Payment
Task 1a	Acknowledgement of Materials	48 hours after receiving materials				
Task 1b	Review of Documentation and Questions for SFWMD	Post questions on SFWMD web-board by Thursday, February 26, 2009	24			
Task 2	Participation in Workshop and Field excursion in Kissimmee, FL	Monday, March 2, 2009 through Wednesday, March 4, 2009 (3 days)	24			
Task 3	Complete Peer Review Report	Friday, March 20, 2009	12			
		TOTAL	60			

7 Definitions

Key terms have been defined to aid in the readability of this statement of work. These terms are as follows:

Chairperson	Panelist who leads the peer review process and prepares the final report
SFWMD	South Florida Water Management District
SFWMD District HQ	Headquarters of the South Florida Water Management District: 3301 Gun Club Road, West Palm Beach, FL 33406
Email Addresses	Addresses to be used by chairperson to submit panel products to the SFWMD.
Mailing Address	Water Supply Department, Mail Code 4350, South Florida Water Management District, P.O. Box 24680, West Palm Beach, FL, 33416-4680
SFWMD Team	A team of scientists and planners from the SFWMD
Panel	The peer review panel, a group of six experts (five panelists and one chairperson) assembled to peer review the project technical report
Panelist	A member of the peer review panel
Peer Review Coordinator	Responsible for the development, oversight and implementation of this statement of work. Activities

	include being the point of contact for inquiries and mailings, scheduling and tracking of completed tasks, booking of meeting rooms and field trips, setting up and maintenance of the web board, procurement, and all other logistical considerations.
Project Technical Lead	Responsible for the completion of the project technical report and all support materials to be reviewed by the panel, the selection of the panel questions, concurrence of the panel and chairperson, and overseeing all technical elements of the peer review.
Reference Materials	This includes a set of important supporting reference documents that will accompany the draft technical document.
Peer Review Report	Peer review documentation prepared by the panel to be submitted to the SFWMD as the final product of the peer review.
Project Technical Report	Technical report summarizing the project for the panel, to be prepared by the project technical lead.
SFWMD	South Florida Water Management District
Web Board	An internet site implemented by the SFWMD and accessible to the public at: Kissimmee River section of the Natural System Technical Document Peer Review Web Board: http://webboard.sfwmd.gov/default.asp?boardid=NSTDPR&action=0 This site will be used as repository for all draft/final chapters and versions of peer review report and agendas for the workshop and teleconference. Under Florida's Sunshine Law, it is mandatory that all communications between two or more panelists occur in a forum open to the public. However no discussions, between panelists, can occur on the web board prior to the workshop to insure an independent review. Data may be posted and read by members of the board, SFWMD staff as well as the public. Anyone experiencing difficulty in accessing the web board should contact the web board administrator. Discussions on posted items shall occur during teleconferences and workshop.
Web Board Administrator	The peer review facilitator will assist anyone with difficulties posting or reading web board messages.
Workshop	A public meeting of the panel to be held in Osceola County, Florida. Personal attendance of panel members is required. Presentations will be given by

the SFWMD to answer questions from the panel and the public. The panel shall discuss and work on peer review and tasks for peer review reports.

ATTACHMENT A
Sunshine Rules

General links:

<http://myfloridalegal.com/pages.nsf/main/b2f05db987e9d14c85256cc7000b28f6!OpenDocument>

https://my.sfwmd.gov/portal/page?_pageid=2934,19738785,2934_19738944&_dad=portal&_schema=PORTAL

Statute link:

http://www.leg.state.fl.us/Statutes/index.cfm?App_mode=Display_Statute&Search_String=&URL=Ch0286/SEC011.HTM&Title=-%3e2007-%3eCh0286-%3eSection%20011

ATTACHMENT B

Task 1

Acknowledgement – Receipt of Draft Documentation and Background Materials

1. I have read the statement of work and I will complete my assigned tasks.

2. I received the draft documentation and background materials on _____
Date

Name

Signed

Please mail to:
Jason Godin
Senior Environmental Scientist
SFWMD
Water Supply Department
Mail Code 4350
West Palm Beach, FL 33416-4680

ATTACHMENT C

Liability Waiver

WHEREAS, _____ (“PARTICIPANT”) has
 [Print full name]
 voluntarily requested, from the South Florida Water Management District (“DISTRICT”), to
 participate in _____
 _____ on or about _____ which may involve the use
 (Types of activities) (Date)
 of DISTRICT transportation (automobiles, airboats, aircraft, and other transportation) and other
 equipment, as well as use of canals, property, and surrounding rights of way owned and operated
 by the DISTRICT; and

WHEREAS, DISTRICT is willing to allow use of its transportation, equipment, canals,
 property, and surrounding rights of way to facilitate the above identified activities upon the
 representations and conditions that PARTICIPANT agrees to abide by all safety procedures,
 agrees to obey all directions and demands of DISTRICT personnel, if any, and PARTICIPANT
 specifically acknowledges and assumes any and all risks associated with the above identified
 activities;

NOW THEREFORE, in consideration of the premises set forth above, I hereby release
 and agree to indemnify and hold harmless the District (including, but not limited to its Governing
 Board members, employees, agents, attorneys, legal representatives, and their successors and
 assigns) from all liability, personal injuries, claims, damages, attorneys fees, costs, judgments,
 claims bills, etc. (under the laws of the State of Florida, and of any other state of the United States
 of America and/or of the United States of America) arising, in whole or in part, from the acts,
 omissions, or negligence of the District or any third person that arises out of or is related to the
 above referenced use of District transportation, equipment, canals, right of ways, personal
 property and real property.

 PARTICIPANT’S SIGNATURE

 DATE

 PRINT PARTICIPANT’S NAME

 WITNESS SIGNATURE

 PRINT PARTICIPANT’S ADDRESS
 PHONE

 PRINT PARTICIPANT’S

 PRINT PARTICIPANT’S CITY & ZIP

ATTACHMENT D

Kissimmee Basin Water Reservations Peer Review Panel Technical Questions

Questions on Fish and Wildlife Indicators and Hydrologic Linkages for Each Reservation Waterbody

1. Do the environmental indicators selected provide the basis for protecting fish and wildlife
 in terms of ensuring sustainable native communities through natural cycles of drought,
 flood, and population variation?
2. Are there any major environmental indicators not considered in our analyses that could
 significantly affect the quantity, timing, and distribution of water identified for the
 protection of fish and wildlife?

3. Do the performance measures A) adequately represent the hydrologic requirements of fish and wildlife identified for protection and B) do the 'range of acceptability' values proposed provide equivalent levels of protection of fish and wildlife?

Questions on Analyses Including Modeling

4. Are the hydrologic methodologies, models, analyses and assumptions sufficiently supported by available scientific knowledge, research and data?
5. Do the hydrologic methodologies, models, analyses and assumptions described in the report yield sufficiently accurate results to reasonably support their applications as described in the report?
6. Can/Should the margin of error associated with the estimation of flow and stage as defined in this report be combined with the range of acceptability associated with the biologic performance measures, for the purpose of describing to policy makers, boundaries within which they are equally sure (or unsure) that the desired protection of fish and wildlife will be achieved.

Questions on Water Reservation Criteria

7. Are the methodologies used to develop the Target Time Series for the river and for the lakes scientifically and technically valid, given the constraints of the initial reservation?
8. Is the water identified for the protection of fish and wildlife technically supported for each of the eight reservation water bodies?
9. What additional work, if any, should be considered to enhance the technical criteria for future updates of these water reservations?

Question on the Overall Technical Document

10. Does the compiled information, including data, analyses, assumptions, and literature review, provide a reasonable basis for the conclusions reached about the water needed to protect fish and wildlife for each of the eight reservation water bodies?

APPENDIX B

**RESTORATION EXPECTATIONS FOR THE KISSIMMEE RIVER
RESTORATION PROJECT**

This document is available as a pdf on the Web Board.

APPENDIX F: ADDITIONAL FLORAL AND FAUNAL COMMUNITIES IN THE KISSIMMEE RIVER AND FLOODPLAIN

PLANT COMMUNITIES

A major component of fish and wildlife habitat is vegetation. Floodplain wetlands are crucial breeding and foraging areas for fish and wildlife (Scheaffer and Nickum 1986, Gladden and Smock 1990). Plants provide food (both directly and indirectly as habitat for prey species); nesting substrate and materials; and shelter for juvenile and adult fish, birds, invertebrates, reptiles, and amphibians. Use of the Kissimmee River and its floodplain by animals is strongly linked to hydrology via vegetation. Floodplain vegetation can serve as a surrogate for the relationships between hydrology and fish and wildlife. For these reasons, and because of its prominence in the fish and wildlife discussions that follow, major classes of floodplain vegetation and their hydrologic requirements are presented first in this appendix.

General categories of Kissimmee River floodplain vegetation are described in the Kissimmee River Vegetation Classification (Bousquin and Carnal 2005). Of primary interest are the Wet Prairie, Broadleaf Marsh, and Wetland Shrub groups. These three wetland types historically (pre-channelization) accounted for more than 80% of the total floodplain habitat. Contribution by wetland group included Broadleaf Marsh at 52%, Wet Prairie at 29%, and Wetland Shrub at 1% (Spencer and Bousquin 2014). Other vegetation groups include Wetland Forest, Miscellaneous Wetlands, and Aquatic Vegetation, which are presented in more detail in Carnal and Bousquin (2005) and Bousquin and Carnal (2005).

This appendix focuses on the three dominant vegetation groups because of their prominence on the floodplain, utility as indicators of floodplain hydrologic conditions, importance to fish and wildlife in the Kissimmee River and floodplain, and the use of the Broadleaf Marsh and Wet Prairie groups as performance measures in the Kissimmee River Restoration Evaluation Program.

Broadleaf Marsh Group

The Broadleaf Marsh group is similar to numerous vegetation types described elsewhere in literature under different regional names (**Table F-1**). The Broadleaf Marsh group in the Kissimmee River floodplain is dominated by one or two indicator species, pickerelweed (*Pontederia cordata*) and/or bulltongue arrowhead (*Sagittaria lancifolia*). Prominent associated species may include the shrub buttonbush (*Cephalanthus occidentalis*) and the grass maidencane (*Panicum hemitomon*). Under normal hydrologic conditions, this community occur in standing water for much of the year. This typically results in a low complement of understory species, which may include cutgrass (*Leersia hexandra*), cupscale (*Sacciolepis striata*), alligatorweed (*Alternanthera philoxeroides*), spatterdock (*Nuphar lutea*), smartweed (*Polygonum punctatum*), bacopa (*Bacopa caroliniana*), dollarweed (*Hydrocotyle umbellata*), and the invasive shrub primrose willow (*Ludwigia peruviana*).

The Broadleaf Marsh group requires extended periods of inundation, with estimates ranging from 190 to 270 days per year (**Table F-1, Figure F-1**). In a study of the Kissimmee River Demonstration Project, Toth (1991) estimated broadleaf marsh hydroperiods to range from 210 to 270 days per year. Kushlan (1990) estimated depth requirements of similar marshes ranging from 0.3 to 1.0 meters (m). Wetzel (2001) estimated 0.2 to 0.4 m as the minimum depth for optimal growth rates for numerous marsh types, including several types of wet prairie. Seasonal or periodic water level reduction is also important in these communities (Kushlan 1990, United States National Vegetation Classification System 2008) to avoid exceeding the upper tolerance of the dominant species, which can uproot and die (Kushlan 1990). In general, floodplain marshes may require fires at least once per decade to inhibit woody plant invasion

(Duever 1990, Florida Natural Areas Inventory 1990, Kushlan 1990). However, the role of fire on the pre-channelization floodplain has been disputed (Toth et al. 1995).


In the pre-channelization system, communities in the Broadleaf Marsh group occurred in a broad swath that dominated the central floodplain where hydroperiods were longest and water was deepest (**Figure F-2**). Broadleaf marsh communities in 1954 (pre-channelization) accounted for approximately 52% of floodplain vegetation within the Kissimmee River Restoration Project (KRRP) Phase I construction area (most of Pool C and a portion of Pool B) (Spencer and Bousquin 2014). A few years after completion of the C-38 Canal in 1971, the Broadleaf Marsh group coverage declined to only 3.1% of the vegetation in the Phase I area. Although coverage of the Broadleaf Marsh group increased over the next 25 years to 15% in 1996, it occurred mostly in impounded wetlands (Spencer and Bousquin 2014) and its coverage remained much lower than the pre-channelized condition. This decline of long hydroperiod floodplain vegetation coincided with reductions in fish and wildlife populations over the same periods, as described elsewhere in this appendix and in Toth (1993) and Bousquin et al. (2005). The most recent KRRP Phase I floodplain vegetation map at this writing was completed in 2011, 10 years after completion of restoration construction and implementation of an interim water regulation schedule. While sporadic inundation re-established various kinds of wetland vegetation over much of the floodplain, the Broadleaf Marsh group accounted for only 21% of the Phase I area (L. Spencer, South Florida Water Management District [SFWMD], unpublished data), with most of its former distribution occupied by communities in the Wet Prairie group. Thus, while intermittent inundation has been achieved since completion of Phase I, annual durations of inundation have proved inadequate for recovery of the Broadleaf Marsh group. Expansion to its former floodplain distribution is expected when extended hydroperiods are re-established under the Headwaters Revitalization Water Regulation Schedule (United States Army Corps of Engineers 1996), currently projected for implementation in 2020.

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

4372 Table F-1. Duration and depth of inundation for wetland plant communities similar to the Broadleaf Marsh and Wet Prairie groups on the
4373 Kissimmee River.

Community	Source Nomenclature	Dominant Species	Source	Duration (days)	Depth
Pickerelweed marsh	Pickerelweed Tropical Herbaceous Vegetation, Unique ID CEGl004261	Pickerelweed	USNVC (2008)	Most of year, with little variation in hydroperiod	
Floodplain marsh	Floodplain marsh, river marsh	Maidencane, buttonbush, and sawgrass; other typical plants include arrowheads and pickerelweed	FNAI (1990)	>250	
Broadleaf marsh	Broadleaf marsh	Pickerelweed and arrowhead	Toth et al. (1998)	210 to 270	
Maidencane-dominated marsh	Maidencane – Pickerelweed Herbaceous Vegetation, Unique ID CEGl004461 (Maidencane is dominant)	Maidencane	USNVC (2008)	>200	0.3-1 m
Flag marsh	Flag marshes	Includes marshes dominated by maidencane, pickerelweed, arrowhead, bulrush, beakrush, and spikerush	Kushlan (1990)	>200	0.3-1 m
Maidencane (species estimate)	Species estimate	Maidencane	Lowe (1986, Figure 5)	270 to 350	
Maidencane marsh	Maidencane Tropical Herbaceous Vegetation, Unique ID CEGl003980	Maidencane	USNVC (2008)	180 to 330	
Northern Everglades wet prairie; maidencane can be dominant	Wet prairie (northern Everglades)	Maidencane, spikerush, or beakrush	Richardson (2000)	180 to 300	Standing water
Maidencane marsh	Maidencane marsh	Maidencane	Wetzel (2001) citing Schomer and Drew (1982, page 117)	180 to 270	
Marsh	Marsh	Not specified	Duever (1990), Figure 2	114 to 264	
Southern Everglades wet prairie	Wet prairie (southern Everglades)	Not specified	Richardson (2000) citing Davis (1943)	90 to 210	Less than sloughs but deeper than sawgrass
Wet prairie	Wet prairie	Not specified	Duever et al. (1978) (wet prairie)	111 to 155	
Wet prairie	Wet prairie	Not specified	Duever (1990, Figure 2)	64 to 114	
Flatwoods wet prairie	Wet prairie (flatwoods)	Grasses, sedges, and forbs, including maidencane, cordgrass, beakrush, and muhly	Kushlan (1990)	50 to 100	
Flatwoods wet prairie	Wet prairie (flatwoods)	Grasses and herbs, including maidencane, spikerush, and beakrush	FNAI (1990)	50 to 100	

4374 FNAI = Florida Natural Areas Inventory; m – meter; USNVC = United States National Vegetation Classification System.

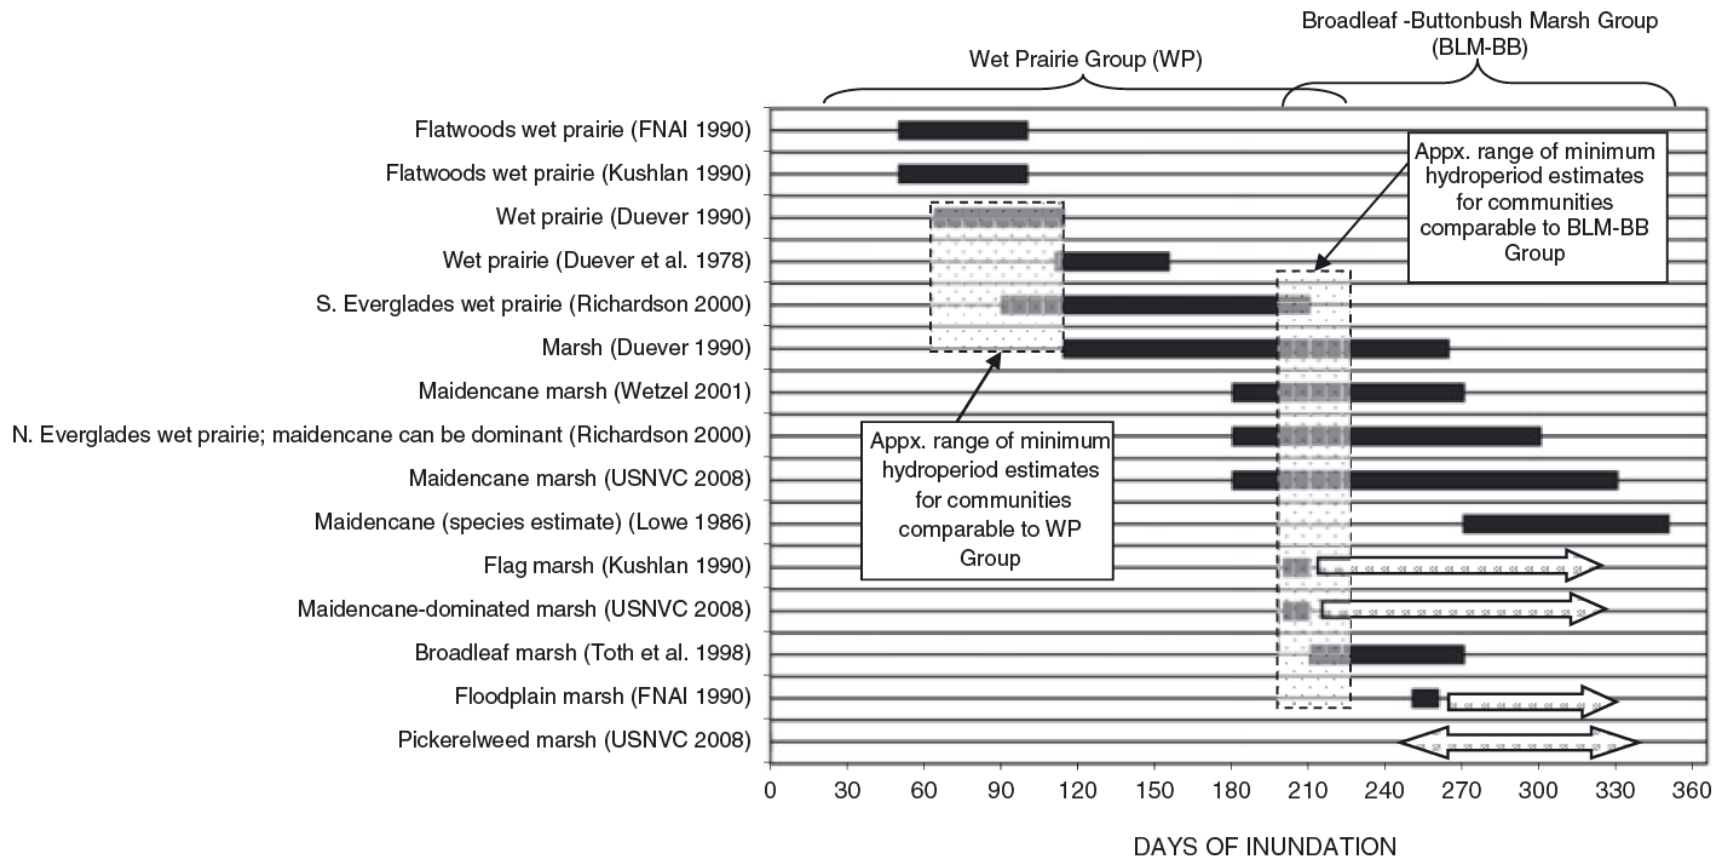

4375
4376 Figure F-1. Published estimates of Florida marsh plant community inundation durations.

4377 Gray arrows indicate estimates for which only a minimum inundation duration was described or no numerical estimate was provided (e.g., the duration given for
4378 pickerelweed marsh was "most of year with little variation in hydroperiod" in United States National Vegetation Classification System [USNVC 2008]). See
4379 **Table F-1** for additional details. Note: FNAI = Florida Natural Areas Inventory.

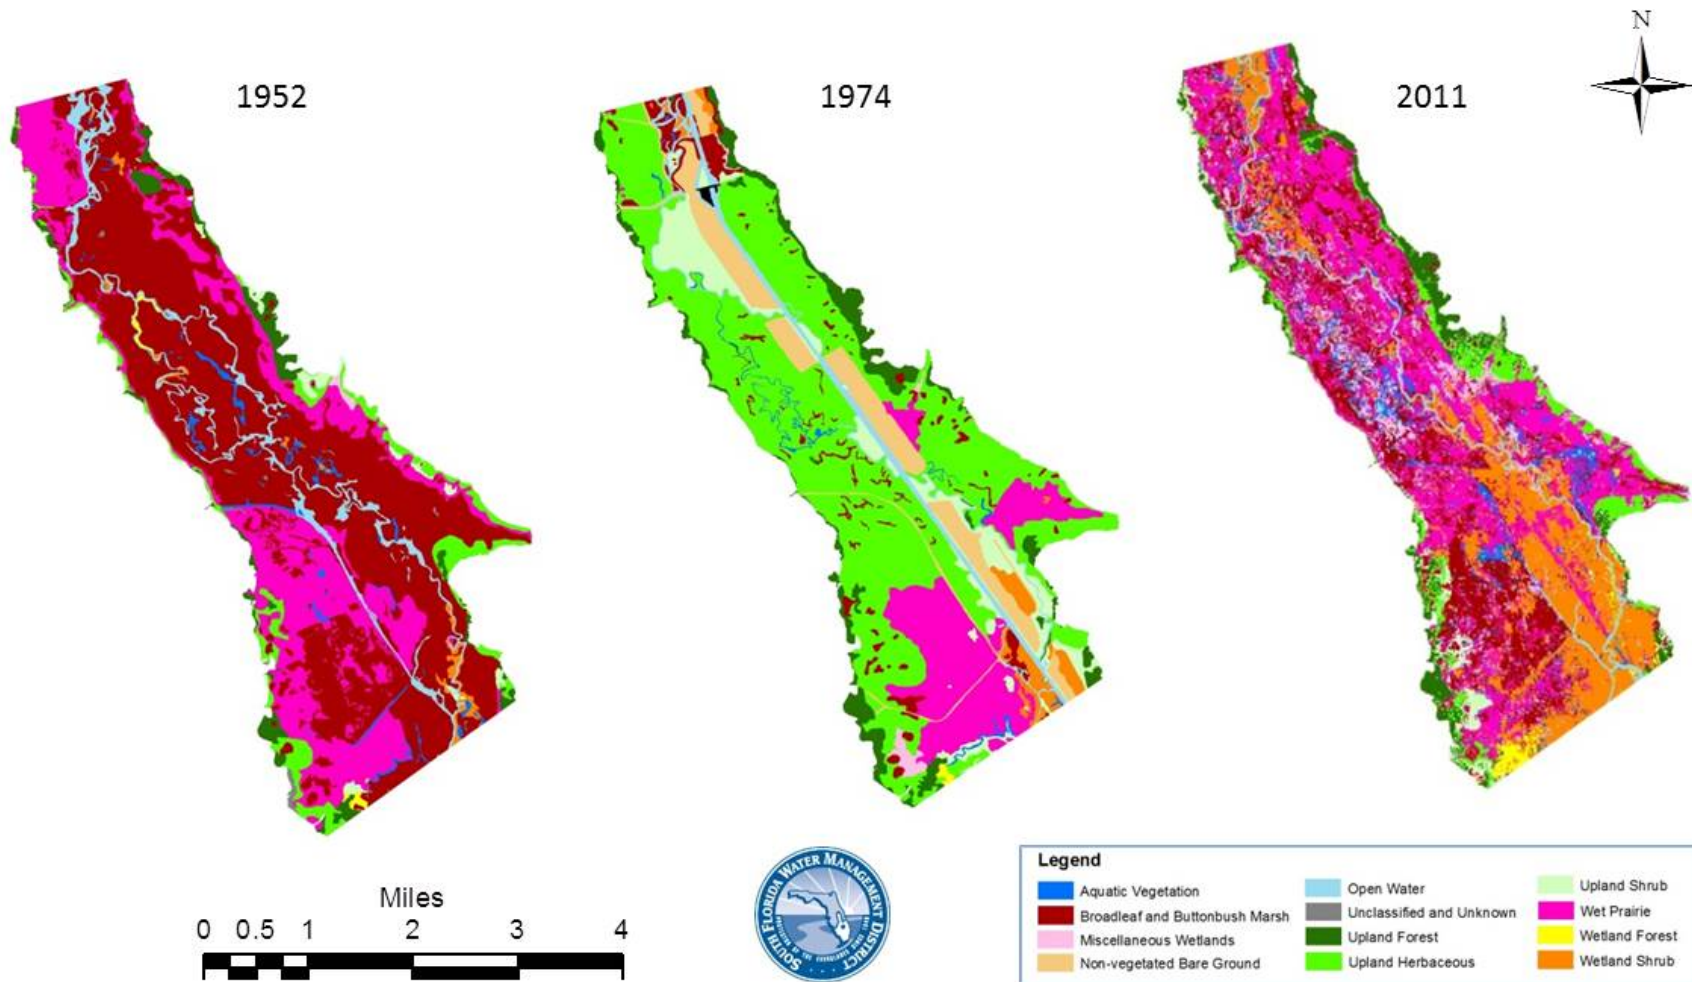


Figure F-2. Floodplain vegetation in the Phase I area of the Kissimmee River Restoration Project before channelization (left), 3 years after channelization was completed in 1971 (center), and 10 years after re-establishment of flow (right).

The Phase I construction area includes most of Pool C and portions of Pool B where flow and partial floodplain inundation were re-established in 2001. Red, pink, purple, and orange coloring denotes major wetland classes. Bright and light greens are upland classes. (Based on data from: Milleson et al. 1980, Pierce et al. 1982, Spencer and Bousquin 2014).

4386 **Wet Prairie Group**

4387 Communities included in the Wet Prairie group are variable in species composition. The group includes
 4388 several herbaceous, emergent plant communities that have shorter hydroperiod requirements than the
 4389 Broadleaf Marsh group. Almost all emergent marsh communities not classified as in the Broadleaf Marsh
 4390 group are in the Wet Prairie group.

4391 The Wet Prairie group comprises communities dominated by grasses and sedges, including maidencane,
 4392 beakrushes (*Rhynchospora* spp.), soft rush (*Juncus effusus*), bushy broomgrass (*Andropogon glomeratus*),
 4393 flatsedges (*Cyperus* spp.), spikerushes (*Eleocharis* spp.), Virginia iris (*Iris virginica*), cutgrass (*Leersia*
 4394 *hexandra*), and watergrass (*Luziola fluitans*), as well as a few associations dominated by forbs, such as
 4395 dotted smartweed (*Polygonum punctatum*). Additional details on the composition of Wet Prairie group
 4396 community types can be found in the appendices to Bousquin and Carnal (2005).

4397 The term “wet prairie” is used to classify a variety of emergent marsh communities occurring across a range
 4398 of hydrologic situations (**Figure F-1**). The term often describes herbaceous graminoid-dominated
 4399 communities in areas between longer hydroperiod wetlands and surrounding uplands, or in wet inclusions
 4400 within uplands. Literature estimates of inundation duration for vegetation comparable in species
 4401 composition to the Wet Prairie group range from 60 to 180 days per year (**Table F-1, Figure F-1**). The Wet
 4402 Prairie group requires periodic drying (Goodrick and Milleson 1984, Barbour and Billings 2000) for
 4403 germination and growth of seedlings. Wet Prairie group communities are believed to be adapted to fire and
 4404 may depend on periodic burning to inhibit invasion by shrubs (Wade et al. 1980).

4405 On the Kissimmee River floodplain, Wet Prairie group communities occur between the upper elevations of
 4406 the Broadleaf Marsh group and surrounding uplands. Before channelization, Wet Prairie group
 4407 communities occurred in an irregular, relatively narrow strip around much of the floodplain’s periphery,
 4408 and in depressions at higher elevations covering approximately 29% of the floodplain (**Figure F-2**) (Pierce
 4409 et al. 1982, Spencer and Bousquin 2014). Following completion of the C-38 Canal in 1971, much of the
 4410 Wet Prairie group distribution rapidly converted to various upland herbaceous communities and declined
 4411 to 15% coverage (**Figure F-2**). Where these communities were used as pasture, shrub invasion was
 4412 inhibited by grazing or mechanical maintenance; in less accessible places, large areas of upland shrub stands
 4413 developed. By 1996, where conditions remained intermittently wet following channelization, the Wet
 4414 Prairie and Wetland Shrub groups occupied areas that had been in the Broadleaf Marsh group, but at similar
 4415 coverage (13%) as in 1971. Where backfilling was completed in 2001 for KRRP Phase I, a rapid conversion
 4416 to wetland vegetation occurred by 2003, increasing Wet Prairie group coverage to 33%, with equivalent
 4417 coverage (30%) being maintained to 2011 (**Figure F-2**). Much of this coverage is expected to convert to
 4418 the Broadleaf Marsh group following completion of the project in 2020 following implementation of the
 4419 Headwaters Revitalization Water Regulation Schedule (United States Army Corps of Engineers 1996) and
 4420 re-establishment of longer floodplain hydroperiods.

4421 **Wetland Shrub Group**

4422 Several communities dominated by the following wetland-dependent shrub taxa fall into the Wetland Shrub
 4423 group: buttonbush (*Cephalanthus occidentalis*), Carolina willow (*Salix caroliniana*), primrose willow
 4424 (*Ludwigia peruviana* and/or *L. leptocarpa*), and St. John’s wort (*Hypericum fasciculatum*). The last two
 4425 species are not major components of the Kissimmee River floodplain.

4426 Buttonbush is a native component of the Broadleaf Marsh group that comprises understories
 4427 indistinguishable from the Broadleaf Marsh group but is classified as shrub stands due to areal cover of
 4428 buttonbush that exceeds 30%. Therefore, hydrologic requirements of buttonbush communities are within
 4429 the same range as the Broadleaf Marsh group. Carolina willow communities occur along abandoned channel

4430 oxbows and other slight rises in elevation on the floodplain, sometimes over large areas, and are an
 4431 important source of cover and nesting substrate for wading birds (M. Cheek, SFWMD, personal
 4432 observation) as in the southern Everglades (Frederick and Spalding 1994). Primrose willow, an exotic and
 4433 invasive shrub, often occurs as an undesirable but persistent element of the Broadleaf Marsh group,
 4434 particularly under the deep, stabilized water regimes that occur at water control structures in the lower
 4435 regions of pools in the channelized condition. Primrose willow may brown and drop leaves when plants are
 4436 flooded to approximately 50% to 70% of their height (B. Anderson and S. Bousquin, SFWMD, personal
 4437 observation), but may rapidly re-sprout when water levels recede before death of the plants.

4438 The Wetland Shrub group represented approximately 1% of the KRRP Phase I area floodplain vegetation
 4439 prior to channelization of the Kissimmee River, remained low (3%) within 3 years of channelization (1974),
 4440 and increased to 19% by the most recent complete vegetation map (2011, 10 years after completion of
 4441 KRRP Phase I construction in 2001) (**Figure F-2**). Woody species respond more slowly than herbaceous
 4442 vegetation; the 2011 increase likely began during the channelized period. Wetland Shrub group
 4443 distributions may continue to be influenced by the current inability to fully re-establish pre-channelization
 4444 hydroperiods. This situation is expected to be resolved by the revised water regulation schedule slated for
 4445 implementation in 2020 (United States Army Corps of Engineers 1996).

4446 FISH

4447 Fish assemblages and hydrologic requirements are described in Chapter 4 of the main document. **Table F-2**
 4448 provides a species list and life history characteristics.

4449 Table F-2. Species of fish recorded from the Kissimmee River and their guild, spawning season, and
 4450 mode of spawning.

Common Name	Scientific Name	Guild ¹	Spawning Season	Spawning Mode ²
Bowfin	<i>Amia calva</i>	OS	April to July	N
Redfin pickerel	<i>Esox americanus</i>	OS	Spring and fall	SD
Chain pickerel	<i>Esox niger</i>	OS	Spring and fall	SD
Yellow bullhead	<i>Ameiurus natalis</i>	OS	April to May	N
Brown bullhead	<i>Ameiurus nebulosus</i>	OS	May	N
Tadpole madtom	<i>Noturus gyrinus</i>	OS	June to July	N
Pirate perch	<i>Aphredoderus sayanus</i>	OS	December to May	N/M
Flagfish	<i>Jordanella floridae</i>	OS	March to September	N, AVD
Bluefin killifish	<i>Lucania goodei</i>	OS	Spring to summer	SA
Mosquitofish	<i>Gambusia holbrooki</i>	OS	Late spring to summer	L
Least killifish	<i>Heterandria formosa</i>	OS	Most of the year	L
Sailfin molly	<i>Poecilia latipinna</i>	OS	Late spring/late summer	L
Everglades pygmy sunfish	<i>Elassoma evergladei</i>	OS		AVD
Okefenokee pygmy sunfish	<i>Elassoma okefenokee</i>	OS		AVD
Bluespotted sunfish	<i>Enneacanthus gloriosus</i>	OS	April to September	N
Longnose gar	<i>Lepisosteus osseus</i>	OD – R	March to September	SV
Florida gar	<i>Lepisosteus platyrhincus</i>	OD – R	April to October	SV
Gizzard shad	<i>Dorosoma cepedianum</i>	OD – R	April to June	SD
Threadfin shad	<i>Dorosoma petenense</i>	OD – L	May to July	SD

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

Common Name	Scientific Name	Guild ¹	Spawning Season	Spawning Mode ²
Common carp – EXOTIC	<i>Cyprinus carpio</i>	OD – J	Spring	SF
Grass carp – EXOTIC	<i>Ctenopharyngodon idella</i>	OD – R	Spring	SA
Golden shiner	<i>Notemigonus crysoleucas</i>	OD – R	April to July	SD
Taillight shiner	<i>Notropis maculatus</i>	OD – L	March to August	SD
Coastal shiner	<i>Notropis petersoni</i>	OD – R, L, J	March to October	SD
Pugnose minnow	<i>Opsopoedus emiliae</i>	OD – J	March to September	SD
Lake chubsucker	<i>Erimyzon sucetta</i>	OD – J	May to July	SD
White catfish	<i>Ameiurus catus</i>	OD – J	April to July	N
Channel catfish	<i>Ictalurus punctatus</i>	OD – R	March to June	N
Walking catfish – EXOTIC	<i>Clarius batrachus</i>	OD – R	June to November	N
Brown hoplo – EXOTIC	<i>Hoplosternum littorale</i>	OD – R	June to November	NF
Seminole killifish	<i>Fundulus seminolis</i>	OD – R, L, J	April to summer	SA
Brook silverside	<i>Labidesthes sicculus</i>	OD – J	June to August	SA
Redbreast sunfish	<i>Lepomis auritus</i>	OD – L	March to September	N
Warmouth	<i>Lepomis gulosus</i>	OD – R, L, J	April to October	N
Bluegill	<i>Lepomis machrochirus</i>	OD – R, L, J	February to October	N
Dollar sunfish	<i>Lepomis marginatus</i>	OD – R, L, J	April to September	N
Redear sunfish	<i>Lepomis microlophus</i>	OD – R, L, J	February to October	N
Spotted sunfish	<i>Lepomis punctatus</i>	OD – R, L, J	May to November	N
Largemouth bass	<i>Micropterus salmoides</i>	OD – R, L, J	December to May	N
Black crappie	<i>Pomoxis nigromaculatus</i>	OD – R, L, J	April to May	N
Oscar – EXOTIC	<i>Astronotus ocellatus</i>	OD – R, L, J		N
Blue tilapia – EXOTIC	<i>Oreochromis aureus</i>	OD – J		N/M
Golden topminnow	<i>Fundulus chrysostus</i>	OD – R	Late spring to summer	SA
Lined topminnow	<i>Fundulus lineatus</i>	HG		SA
Redface topminnow	<i>Fundulus rubifrons</i>	HG		SA
Tidewater silverside	<i>Menidia beryllina</i>	HG	June to August	SD
Swamp darter	<i>Etheostoma fusiforme</i>	HG	December to May	AVD
American eel	<i>Anguilla rostrata</i>	FS		SF
Atlantic needlefish	<i>Strongylura marina</i>	FS	Summer	AVD
Blackbanded darter	<i>Percina nigrofasciata</i>	FS		?
Stripped mullet	<i>Mugil cephalus</i>	FS		SD
Sailfin catfish – EXOTIC	<i>Pterygoplichthys disjunctivus</i>			N

¹ FS = fluvial specialist; HG = habitat generalist; J = juvenile; L = larval; OS = off channel specialist; OD = off channel dependent; R = reproduction. Habitat guild follows Glenn and Arrington (2005).

² AVD = demersal eggs attached to vegetation; L = livebearer; constructs floating nest; N = nest builder; N/M = nest builder/mouthbrooder; SA = scatters adhesive eggs; SD = scatters demersal eggs; SF = scatters floating eggs; SV = scatters eggs in vegetation. Spawning modes are from Trexler (1995).

AMPHIBIANS AND REPTILES

Amphibians and reptiles (herpetofauna) are abundant and often conspicuous inhabitants of freshwater broadleaf marshes. Amphibians are of particular ecological interest because of their complex life cycle, which includes an obligate association of larvae with water. As such, adult and larval amphibians, as well as reptiles, are particularly vulnerable to shifts in wetland hydrology (Pechmann et al. 1989).

Before 1960 and channelization of the Kissimmee River, the Broadleaf Marsh group was one of the dominant vegetation communities, covering approximately half of the floodplain within the KRRP area. Although detailed records of amphibian and reptile use of floodplain wetlands adjacent to the Kissimmee River are not available prior to channelization, Carr (1940) lists characteristic and frequently occurring amphibian and reptile taxa of Central Florida freshwater (broadleaf-like) marshes. These taxa likely accounted for most herpetofaunal species inhabiting floodplain marshes along the pre-channelized Kissimmee River.

Channelization of the river and conversion of wetlands to uplands, combined with shortened and unpredictable hydroperiods in remnant wetlands likely altered herpetofaunal communities (Koebel et al. 2005). Of the 24 species that likely occurred in pre-channelization Broadleaf Marsh group wetlands, only 3 were collected in the drained floodplain adjacent to the Kissimmee River (**Table F-3**): the green tree frog (*Hyla cinera*), the southern leopard frog (*Rana sphenoccephala*), and the eastern cottonmouth (*Agkistrodon piscivorus*). The taxa that appear most affected are those that require long periods of inundation for reproduction (many anurans) and those that are entirely aquatic (salamanders). This reduction is a strong indicator that degraded Broadleaf Marsh group communities no longer adequately function to support the necessary refuge, foraging, and reproductive needs of amphibians and reptiles of the river-floodplain system.

Restoration of pre-channelization hydrology, including long-term floodplain inundation, is expected to re-establish historical floodplain wetland plant communities (Carnal 2005a,b) within the KRRP area. Hydrologic and wetland habitat restoration will be the impetus for recolonization of amphibians and reptiles characteristic of the pre-channelized Kissimmee River floodplain ecosystem. During extreme rainfall events, events that produce standing water on the unrestored Kissimmee River floodplain, all seven native anuran taxa and several species of reptiles likely to exist in natural wetlands of Central Florida were found in limited numbers on the floodplain (B. Anderson, SFWMD, unpublished data). Recruitment from remnant isolated wetlands and unaltered wetlands adjacent to and upstream of the restored river should contribute to rapid recolonization of the restored floodplain. For example, all 24 taxa likely to colonize restored wetlands (**Table F-3**) have been documented in wetlands of the Avon Park Air Force Range, adjacent to the floodplain (Franz et al. 2000). Other studies have shown that amphibians can colonize and reproduce in restored (Lehtinen and Galatowitsch 2001, Stevens et al. 2002, Petranka et al. 2003, Brodman et al. 2006) and constructed wetlands (Knutson et al. 2004).

4491 Table F-3. Characteristic and frequently occurring aquatic amphibian and reptile taxa of Central
4492 Florida freshwater (broadleaf) marshes (From: Carr 1940).

Common Name	Scientific Name	Obligate Association with Water
Amphibians		
Amphiumidae		
Two-toed siren	<i>Amphiuma means</i>	A
Plethodontidae		
Dwarf salamander	<i>Eurycea quadridigitata</i>	A
Sirenidae		
Greater siren	<i>Siren lacertina</i>	A
Hylidae		
Florida chorus frog	<i>Pseudacris nigrata verrucosa</i>	L
Florida cricket frog	<i>Acris gryllus dorsalis</i>	L
Green tree frog*	<i>Hyla cinerea</i>	L
Little grass frog	<i>Pseudacris ocularis</i>	L
Squirrel tree frog	<i>Hyla squirella</i>	L
Ranidae		
Pig frog	<i>Rana grylio</i>	L
Southern leopard frog*	<i>Rana sphenoccephala</i>	L
Reptiles		
Alligatoridae		
American alligator	<i>Alligator mississippiensis</i>	
Chelydridae		
Florida snapping turtle	<i>Chelydra serpentina osceola</i>	
Colobridae		
Eastern mud snake	<i>Farancia abacura</i>	
Florida green water snake	<i>Nerodia floridana</i>	
Florida water snake	<i>Nerodia fasciata pictiventris</i>	
South Florida swamp snake	<i>Seminatrix pygaea</i>	
Striped crayfish snake	<i>Regina alleni</i>	
Emydidae		
Florida chicken turtle	<i>Deirochelys reticularia</i>	
Peninsula red-bellied turtle	<i>Pseudemys nelsoni</i>	
Peninsular cooter	<i>Pseudemys floridana</i>	
Kinosternidae		
Common musk turtle	<i>Sternotherus odoratus</i>	
Florida mud turtle	<i>Kinosternon subrubrum steindachneri</i>	
Trionychidae		
Florida softshell turtle	<i>Trionyx ferox</i>	
Viperidae		
Eastern cottonmouth*	<i>Agkistrodon piscivorus</i>	

A = adult; L = larvae.

* Denotes taxa observed in degraded Broadleaf Marsh group (currently pasture) adjacent to the Kissimmee River.

4495 **BIRDS**

4496 Bird assemblages, hydrologic requirements, and life history characteristics are described in Chapter 4 of
 4497 the main document and in **Tables F-4** and **F-5**.

4498 Table F-4. Birds of the Kissimmee River floodplain, including seasonality and protective status.

Common Name	Scientific Name	Seasonality ¹	Status ²
American bittern	<i>Botaurus lentiginosus</i>	V	
American coot	<i>Fulica americana</i>	R	
American crow	<i>Corvus brachyrhynchos</i>	R	
American redstart	<i>Setophaga ruticilla</i>	M	
American robin	<i>Turdus migratorius</i>	V	
American swallow-tailed kite	<i>Elanoides forficatus</i>	R	
American white pelican	<i>Pelecanus erythrorhynchos</i>	V	
American wigeon	<i>Anas americana</i>	V	
American woodcock	<i>Scolopax minor</i>	V	
Anhinga	<i>Anhinga anhinga</i>	R	
Bald eagle	<i>Haliaeetus leucocephalus</i>	R	
Baltimore oriole	<i>Icterus galbula</i>	V	
Barn owl	<i>Tyto alba</i>	R	
Barn swallow	<i>Hirundo rustica</i>	M	
Barred owl	<i>Strix varia</i>	R	
Belted kingfisher	<i>Megasceryle alcyon</i>	V	
Black skimmer	<i>Rynchops niger</i>	S	ST
Black tern	<i>Chlidonias niger</i>	M	
Black vulture	<i>Coragyps atratus</i>	R	
Black-bellied whistling duck	<i>Dendrocygna autumnalis</i>	R	
Black-crowned night heron	<i>Nycticorax nycticorax</i>	R	
Black-necked stilt	<i>Himantopus mexicanus</i>	R	
Blue-gray gnatcatcher	<i>Polioptila caerulea</i>	R	
Bluejay	<i>Cyanocitta cristata</i>	R	
Blue-winged teal	<i>Anas discors</i>	V	
Blue-winged warbler	<i>Vermivora pinus</i>	M	
Boat-tailed grackle	<i>Quiscalus major</i>	R	
Bobolink	<i>Dolichonyx oryzivorus</i>	M	
Bonapart's gull	<i>Chroicocephalus philadelphia</i>	S	
Brewer's blackbird	<i>Euphagus cyanocephalus</i>	S	
Brown pelican	<i>Pelecanus occidentalis</i>	S	
Brown thrasher	<i>Toxostoma rufum</i>	R	
Brown-headed cowbird	<i>Molothrus ater</i>	R	
Carolina wren	<i>Thryothorus ludovicianus</i>	R	
Caspian tern	<i>Hydroprogne caspia</i>	S	
Cattle egret	<i>Bubulcus ibis</i>	R	
Chimney swift	<i>Chaetura pelagica</i>	R	
Chuck-will's widow	<i>Caprimulgus carolinensis</i>	R	
Common grackle	<i>Quiscalus quiscula</i>	R	
Common ground dove	<i>Columbina passerina</i>	R	
Common moorhen	<i>Gallinula chloropus</i>	R	
Common nighthawk	<i>Chordeiles minor</i>	R	
Common yellowthroat	<i>Geothlypis trichas</i>	R	
Cooper's hawk	<i>Accipiter cooperii</i>	R	
Crested caracara	<i>Caracara cheriway</i>	R	FT
Double-crested cormorant	<i>Phalacrocorax auritus</i>	R	
Downy woodpecker	<i>Picoides pubescens</i>	R	
Eastern bluebird	<i>Sialia sialis</i>	R	
Eastern kingbird	<i>Tyrannus tyrannus</i>	R	
Eastern meadowlark	<i>Sturnella magna</i>	R	

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

Common Name	Scientific Name	Seasonality ¹	Status ²
Eastern phoebe	<i>Sayornis phoebe</i>	V	
Eastern screech owl	<i>Megascops asio</i>	R	
Eastern towhee	<i>Pipilo erythrophthalmus</i>	R	
Eastern wood-peewee	<i>Contopus virens</i>	M	
Fish crow	<i>Corvus ossifragus</i>	R	
Florida burrowing owl	<i>Athene cunicularia floridana</i>	R	ST
Florida grasshopper sparrow	<i>Ammodramus savannarum floridanus</i>	R	FE
Florida sandhill crane	<i>Grus canadensis pratensis</i>	R	ST
Forster's tern	<i>Sterna forsteri</i>	V	
Fulvous whistling duck	<i>Dendrocygna bicolor</i>	R	
Glossy ibis	<i>Plegadis falcinellus</i>	R	
Golden-crowned kinglet	<i>Regulus satrapa</i>	S	
Gray catbird	<i>Dumetella carolinensis</i>	R	
Great blue heron	<i>Ardea herodias</i>	R	
Great egret	<i>Ardea alba</i>	R	
Great-crowned flycatcher	<i>Myiarchus crinitus</i>	R	
Greater yellowlegs	<i>Tringa melanoleuca</i>	V	
Great horned owl	<i>Bubo virginianus</i>	R	
Green heron	<i>Butorides virescens</i>	R	
Green-winged teal	<i>Anas crecca</i>	V	
Gull-billed tern	<i>Gelochelidon nilotica</i>	S	
Hermit thrush	<i>Catharus guttatus</i>	V	
Herring gull	<i>Larus argentatus</i>	V	
Hooded merganser	<i>Lophodytes cucullatus</i>	V	
House wren	<i>Troglodytes aedon</i>	V	
Killdeer	<i>Charadrius vociferus</i>	R	
King rail	<i>Rallus elegans</i>	R	
Least bittern	<i>Ixobrychus exilis</i>	R	
Least sandpiper	<i>Calidris minutilla</i>	V	
Least tern	<i>Sternula antillarum</i>	S	ST
Lesser scaup	<i>Aythya affinis</i>	V	
Lesser yellowlegs	<i>Tringa flavipes</i>	V	
Limpkin	<i>Aramus guarauna</i>	R	
Lincoln's sparrow	<i>Melospiza lincolni</i>	S	
Little blue heron	<i>Egretta caerulea</i>	R	ST
Loggerhead shrike	<i>Lanius ludovicianus</i>	R	
Long-billed dowitcher	<i>Limnodromus scolopaceus</i>	V	
Mallard	<i>Anas platyrhynchos</i>	R	
Marsh wren	<i>Cistothorus palustris</i>	V	
Merlin	<i>Falco columbarius</i>	V	
Mottled duck	<i>Anas fulvigula</i>	R	
Mourning dove	<i>Zenaida macroura</i>	R	
Northern bobwhite	<i>Colinus virginianus</i>	R	
Northern cardinal	<i>Cardinalis cardinalis</i>	R	
Northern flicker	<i>Colaptes auratus</i>	R	
Northern harrier	<i>Circus cyaneus</i>	V	
Northern mockingbird	<i>Mimus polyglottos</i>	R	
Northern parula	<i>Parula americana</i>	R	
Northern pintail	<i>Anas acuta</i>	V	
Northern rough-winged swallow	<i>Stelgidopteryx serripennis</i>	R	
Northern shoveler	<i>Anas clypeata</i>	V	
Northern waterthrush	<i>Seiurus noveboracensis</i>	M	
Osprey	<i>Pandion haliaetus</i>	R	
Ovenbird	<i>Seiurus aurocapilla</i>	V	
Painted bunting	<i>Passerina ciris</i>	V	
Palm warbler	<i>Dendroica palmarum</i>	V	
Peregrine falcon	<i>Falco peregrinus</i>	V	
Pied-billed grebe	<i>Podilymbus podiceps</i>	R	

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

Common Name	Scientific Name	Seasonality ¹	Status ²
Pileated woodpecker	<i>Dryocopus pileatus</i>	R	
Pine warbler	<i>Dendroica pinus</i>	R	
Prairie warbler	<i>Dendroica discolor</i>	V	
Purple gallinule	<i>Porphyrio martinica</i>	R	
Purple martin	<i>Progne subis</i>	R	
Red-bellied woodpecker	<i>Melanerpes carolinus</i>	R	
Red-headed woodpecker	<i>Melanerpes erythrocephalus</i>	R	
Red-shouldered hawk	<i>Buteo lineatus</i>	R	
Red-tailed hawk	<i>Buteo jamaicensis</i>	R	
Red-winged blackbird	<i>Agelaius phoeniceus</i>	R	
Ring-necked duck	<i>Aythya collaris</i>	V	
Roseate spoonbill	<i>Platalea ajaja</i>	R	ST
Ruby-crowned kinglet	<i>Regulus calendula</i>	V	
Ruby-throated hummingbird	<i>Archilochus colubris</i>	R	
Ruddy duck	<i>Oxyura jamaicensis</i>	V	
Savannah sparrow	<i>Passerculus sandwichensis</i>	V	
Sedge wren	<i>Cistothorus platensis</i>	V	
Sharp-shinned hawk	<i>Accipiter striatus</i>	V	
Short-billed dowitcher	<i>Limnodromus griseus</i>	V	
Short-tailed hawk	<i>Buteo brachyurus</i>	R	
Snail kite	<i>Rostrhamus sociabilis</i>	R	FE
Snowy egret	<i>Egretta thula</i>	R	
Solitary sandpiper	<i>Tringa solitaria</i>	M	
Song sparrow	<i>Melospiza melodia</i>	V	
Sora	<i>Porzana carolina</i>	V	
Southeast American kestrel	<i>Falco sparverius paulus</i>	R, V	ST
Spotted sandpiper	<i>Actitis macularius</i>	V	
Summer tanager	<i>Piranga rubra</i>	R	
Swamp sparrow	<i>Melospiza georgiana</i>	V	
Tree swallow	<i>Tachycineta bicolor</i>	V	
Tricolored heron	<i>Egretta tricolor</i>	R	ST
Turkey vulture	<i>Cathartes aura</i>	R	
Vesper sparrow	<i>Poocetes gramineus</i>	V	
Whip-poor-will	<i>Caprimulgus vociferus</i>	V	
White ibis	<i>Eudocimus albus</i>	R	
White-eyed vireo	<i>Vireo griseus</i>	R	
White-tailed kite	<i>Elanus leucurus</i>	S	
White-throated sparrow	<i>Zonotrichia albicollis</i>	V	
White-winged dove	<i>Zenaida asiatica</i>	R	
Wild turkey	<i>Meleagris gallopavo</i>	R	
Wilson's snipe	<i>Gallinago delicata</i>	V	
Wood duck	<i>Aix sponsa</i>	R	
Wood stork	<i>Mycteria americana</i>	R	FT
Yellow warbler	<i>Dendroica petechia</i>	M	
Yellow-bellied sapsucker	<i>Sphyrapicus varius</i>	V	
Yellow-billed cuckoo	<i>Coccyzus americanus</i>	R	
Yellow-breasted chat	<i>Icteria virens</i>	M	
Yellow-crowned night heron	<i>Nyctanassa violacea</i>	R	
Yellow-headed blackbird	<i>Xanthocephalus xanthocephalus</i>	S	
Yellow-rumped warbler	<i>Dendroica coronata</i>	V	
Yellow-throated warbler	<i>Dendroica dominica</i>	R	

¹ M = transient migrant (non-breeding); R = breeding resident; S = uncommon straggler (non-breeding); V = seasonal visitor (non-breeding).

² FT = threatened (federal), and FE = endangered (federal); ST = threatened (state). From: Florida Fish and Wildlife Conservation Commission. *Florida's Endangered and Threatened Species*. Updated December 2018.

4503 Table F-5. Foraging and breeding habitat hydrologic requirements of wetland-obligate bird species of the Kissimmee River floodplain,
4504 including preferred foraging and breeding habitats.

Common Name	Scientific Name	Foraging Habitat Type	Foraging Hydrologic Requirements	Breeding Habitat Type	Breeding Hydrologic Requirements (Water Depth)
Ducks, Geese, and Swans (Anseriformes, Anatidae)					
American wigeon	<i>Anas americana</i>	All	0 to 20 cm	--	--
Black-bellied whistling duck	<i>Dendrocygna autumnalis</i>	All, OW	0 to ≤6.6 cm	WF (BLM, WS, WP)	Near water
Blue-winged teal	<i>Anas discors</i>	BLM, WP	13 to 88 cm (mean 30 cm)	--	--
Fulvous whistling-duck	<i>Dendrocygna bicolor</i>	All, OW	<0.5 m	BLM, WS, WP	<0.5 m
Green-winged teal	<i>Anas crecca</i>	All	0 to 25 cm (mean <12 cm)	--	--
Hooded merganser	<i>Lophodytes cucullatus</i>	All and OW	<1.5 m	--	--
Lesser scaup	<i>Aythya affinis</i>	OW, BLM	<3 m	--	--
Mallard	<i>Anas platyrhynchos</i>	All, OW	0-39 (mean 31 to 39 cm)	--	--
Mottled duck	<i>Anas fulvigula</i>	BLM, WP, WS, OW	<30 cm	WS, WP (obligatory nester near wetlands)	Within 15 to 219 m of water (mean 119 m)
Northern pintail	<i>Anas acuta</i>	BLM, WP, OW	0 to 30 cm	--	--
Northern shoveler	<i>Anas clypeata</i>	OW, BLM, WP	<40 cm	--	--
Ring-necked duck	<i>Aythya collaris</i>	All, OW	<1.5 m	--	--
Ruddy duck	<i>Oxyura jamaicensis</i>	OW, BLM, WP	1 to 3 m	--	--
Wood duck	<i>Aix sponsa</i>	WF, WS	18 to 40 cm (up to 1 m)	WF	Over or near water; <2 km from water maximum
Grebes (Podicipediformes, Podicipedidae)					
Pied-billed grebe	<i>Podilymbus podiceps</i>	All, OW	<6 m	BLM, WP, WS	>25 cm
Pelicans (Pelecaniformes, Pelecanidae)					
American white pelican	<i>Pelecanus erythrorhynchos</i>	BLM, WP	0.3 to 2.5 m	--	--
Brown pelican	<i>Pelecanus occidentalis</i>	BLM, WP, OW	Permanently flooded <150 m	--	--
Cormorants (Phalacrocoracidae)					
Double-crested cormorant	<i>Phalacrocorax auritus</i>	WS, WF, OW	<8 m	WF, WS	<10 km from water
Darters (Anhingidae)					
Anhinga	<i>Anhinga anhinga</i>	WS, WF, OW	<0.5 m	WF, WS	1 to 4.6 m above water

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

Common Name	Scientific Name	Foraging Habitat Type	Foraging Hydrologic Requirements	Breeding Habitat Type	Breeding Hydrologic Requirements (Water Depth)
Herons, Bitterns, and Allies (Ciconiiformes, Ardeidae)					
American bittern	<i>Botaurus lentiginosus</i>	BLM, WP	Mean 10 cm	--	--
Black-crowned night heron	<i>Nycticorax nycticorax</i>	All, OW	<20 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Great blue heron	<i>Ardea herodias</i>	All, OW	<40 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Great egret	<i>Ardea alba</i>	All, OW	<28 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Green heron	<i>Butorides virescens</i>	All, OW	<10 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Least bittern	<i>Ixobrychus exilis</i>	BLM, WS, WP	1 to 60 cm; usually at surface	BLM, WS, WP	Over water >0.5 m March to August; recession <18.3 cm/week
Little blue heron	<i>Egretta caerulea</i>	All, OW	<17 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Snowy egret	<i>Egretta thula</i>	All, OW	<17 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Tricolored heron	<i>Egretta tricolor</i>	All, OW	<18 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Yellow-crowned night heron	<i>Nyctanassa violacea</i>	All, OW	<10 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Ibises and Spoonbills (Threskiornithidae)					
Glossy ibis	<i>Plegadis falcinellus</i>	All, OW	<10 cm	All	Over water >0.5 m March to August; recession <18.3 cm/week
Roseate spoonbill	<i>Platalea ajaja</i>	All, OW	<20 cm (mean ≤12 cm)	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
White ibis	<i>Eudocimus albus</i>	All, OW	<20 cm (mean 5 to 10 cm)	WF, WS (BLM, WP)	Over water >0.5 m March to August; recession <18.3 cm/week
Storks (Ciconiidae)					
Wood stork	<i>Mycteria americana</i>	All, OW	<50 cm	WF, WS	Over water >0.5 m March to August; recession <18.3 cm/week
Hawks, Kites, Eagles, and Allies (Falconiformes, Accipitridae)					
Bald eagle	<i>Haliaeetus leucocephalus</i>	BLM, WP, OW	0 to 2 m	WF (<2 km water)	<2 km from open water
Osprey	<i>Pandion haliaetus</i>	All, OW	0.5 to 2 m	WF (obligatory nester near water)	<1 to 20 km from open water
Snail kite	<i>Rostrhamus sociabilis</i>	BLM, WP, WS, OW	0.2 to 1.3 m	WS, WF	36 to 93 cm

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

Common Name	Scientific Name	Foraging Habitat Type	Foraging Hydrologic Requirements	Breeding Habitat Type	Breeding Hydrologic Requirements (Water Depth)
Rails, Gallinules, and Coots (Gruiformes, Rallidae)					
American coot	<i>Fulica americana</i>	All, OW	<6 m	All	Over permanent water <1.2 m from open water
Common moorhen	<i>Gallinula chloropus</i>	All, OW	15 to 120 cm	WS, BLM, WP	0 to 60 cm
King rail	<i>Rallus elegans</i>	BLM, WS, WP	<10 cm	BLM, WS, WP	10 to 46 cm
Purple gallinule	<i>Porphyrio martinica</i>	All, OW	0.25 to 1 m	BLM, WF, WS	14.7 cm (6 to 26 cm)
Sora	<i>Porzana carolina</i>	BLM, WP, WS	<15 cm (0 to 46 cm)	--	--
Limpkins (Aramidae)					
Limpkin	<i>Aramus guarauna</i>	BLM, WS, WF, OW	<30 cm	All	61.2 cm (41 to 122 cm)
Cranes (Gruidae)					
Florida sandhill crane	<i>Grus canadensis pratensis</i>	BLM, WEP	0 to 30 cm	BLM, WEP, WS	13.5 to 32.6 cm
Stilts and Avocets (Charadriiformes, Recurvirostridae)					
Black-necked stilt	<i>Himantopus mexicanus</i>	BLM, WS, WP, OW	<13 cm	BLM, WP	Usually over water or <50 m from open water
Sandpipers and Allies (Scolopacidae)					
Greater yellowlegs	<i>Tringa melanoleuca</i>	BLM, WP, OW	5 to 7.4 cm	--	--
Least sandpiper	<i>Calidris minutilla</i>	BLM, WP, WS, OW	<4 cm	--	--
Lesser yellowlegs	<i>Tringa flavipes</i>	BLM, WP, WS, OW	2.6 cm (4 to 16 cm)	--	--
Long-billed dowitcher	<i>Limnodromus scolopaceus</i>	BLM, WS, WP, OW	0 to 16 cm	--	--
Short-billed dowitcher	<i>Limnodromus griseus</i>	BLM, WS, WP, OW	<8 cm	--	--
Solitary sandpiper	<i>Tringa solitaria</i>	BLM, WP, WS, OW	<5 cm	--	--
Spotted sandpiper	<i>Actitis macularius</i>	BLM, WP, OW	<4 cm	--	--
Wilson's snipe	<i>Gallinago delicata</i>	All	<8 cm	--	--
Skuas, Gulls, Terns, and Skimmers (Laridae)					
Black skimmer	<i>Rynchops niger</i>	BLM, WP, OW	<2.5 to 20 cm	--	--
Black tern	<i>Chlidonias niger</i>	BLM, WP, OW	>0.5 m	--	--
Bonapart's gull	<i>Chroicocephalus philadelphia</i>	BLM, WP, OW	>0.5 m	--	--
Caspian tern	<i>Hydroprogne caspia</i>	BLM, WP, OW	0.5 to 5 m	--	--
Forster's tern	<i>Sterna forsteri</i>	OW, BLM, WP	<1 m	--	--
Gull-billed tern	<i>Gelochelidon nilotica</i>	BLM, WP, OW	0 to 5 m	--	--
Herring gull	<i>Larus argentatus</i>	WP, BLM, OW	<1-2 m	--	--
Least tern	<i>Sternula antillarum</i>	BLM, WP, WS, OW	0 to 5 m	--	--

Appendix F: Additional Floral and Faunal Communities in the Kissimmee River

Common Name	Scientific Name	Foraging Habitat Type	Foraging Hydrologic Requirements	Breeding Habitat Type	Breeding Hydrologic Requirements (Water Depth)
Kingfishers (Coraciiformes, Alcedinidae)					
Belted kingfisher	<i>Megasceryle alcyon</i>	All, OW	<60 cm	--	--
Swallows (Passeriformes, Hirundinidae)					
Tree swallow	<i>Tachycineta bicolor</i>	All	Any	--	--
Wrens (Troglodytidae)					
Marsh wren	<i>Cistothorus palustris</i>	WS, WF, WP, BLM	<1 m	--	--
Emberizids (Emberizidae)					
Swamp sparrow	<i>Melospiza georgiana</i>	All	<4 cm	--	--
Blackbirds (Icteridae)					
Boat-tailed grackle	<i>Quiscalus major</i>	All, OW	<8 cm	WF, WS (BLM, WP) (obligatory nester near water)	93.1 cm
Red-winged blackbird	<i>Agelaius phoeniceus</i>	All	<1 m	WS, BLM, WP	<1 m

All = all habitats, except open water; BLM = Broadleaf Marsh; OW = Open Water; WF = Wet Forest; WP = Wet Prairie; WS = Wet Shrub.

-- Breeding range occurs outside of the Kissimmee River floodplain.

Foraging and breeding habitat information and hydrologic requirements were obtained from point count surveys along the river and from Willard (1977), Powell (1987), Stys (1997), Guillemain et al. (2000), Poole (2008), and Florida Fish and Wildlife Conservation Commission (2003).

4510 **MAMMALS**

4511 Currently, 26 species of mammals use the Kissimmee River and floodplain, including 4 resident breeders
 4512 and 2 federally listed species, the Florida panther (*Puma concolor coryi*) and the Florida bonneted bat
 4513 (*Eumops floridanus*) (**Table F-6**). Although mammals are not monitored as part of the Kissimmee River
 4514 Restoration Evaluation Program, populations likely were negatively impacted by losses of wetland habitat
 4515 and alteration of hydrology caused by channelization.

4516 Mammals using the Kissimmee River and floodplain include 4 obligate wetland species (**Table F-7**),
 4517 18 facultative breeders, and 4 opportunistic foragers. Brief summaries of the aquatic life history
 4518 requirements of several species of mammals are described below. Foraging and breeding habitat hydrologic
 4519 requirements of wetland-dependent species are summarized in **Table F-7**.

4520 The marsh rabbit (*Sylvilagus palustris*), marsh rice rat (*Oryzomys palustris*), and round-tailed muskrat
 4521 (*Neofiber alleni*) depend on dense emergent aquatic vegetation for cover and to construct their houses
 4522 and/or nests near water (Birkenholz 1972, Chapman and Willner 1981, Wolfe 1982). The largely vegetarian
 4523 diet of all three species comprises the roots, stems, leaves, and seeds of herbaceous wetland plants occurring
 4524 in Broadleaf Marsh and Wet Prairie group habitats.

4525 River otters (*Lontra canadensis*) nest in hollow trees or logs, undercut riverbanks, backwater sloughs, flood
 4526 debris, or burrows excavated by other animals, such as the gray fox (*Urocyon cinereoargenteus*) (Lariviere
 4527 and Walton 1998). They depend entirely on aquatic habitats for their main prey, including fish, amphibians,
 4528 crayfish (*Procambarus* spp.), and other aquatic invertebrates.

4529 The 22 facultative and opportunistic wetland mammals include 2 federally endangered species, the Florida
 4530 panther and the Florida bonneted bat (Florida Fish and Wildlife Conservation Commission 2018). The
 4531 Florida panther has been documented on several occasions within the 100-year floodline. The Florida
 4532 bonneted bat was observed foraging over the Kissimmee River floodplain in Pool A, well outside of its
 4533 reported range south and west of Lake Okeechobee (Belwood 1992, Marks and Marks 2008). However,
 4534 these species are considered opportunistic users of the Kissimmee River floodplain.

4535 Table F-6. Mammals of the Kissimmee River and floodplain.

Common Name	Scientific Name
Armadillo	<i>Dasypus novemcinctus</i>
Bobcat	<i>Lynx rufus</i>
Brazilian freetail bat	<i>Tadarida b. cynocephala</i>
Coyote	<i>Canis latrans</i>
Eastern cottontail	<i>Sylvilagus floridanus</i>
Eastern gray squirrel	<i>Sciurus carolinensis</i>
Eastern mole	<i>Scalopus aquaticus</i>
Eastern pipistrel bat	<i>Pipistrellus subflavus</i>
Eastern woodrat	<i>Neotoma floridana</i>
Evening bat	<i>Nycticeius humeralis</i>
Feral hog	<i>Sus scrofa</i>
Florida black bear	<i>Ursus americanus floridanus</i>
Florida bonneted bat*	<i>Eumops floridanus</i>
Florida panther*	<i>Puma concolor coryi</i>
Gray fox	<i>Urocyon cinereoargenteus</i>
Marsh rabbit	<i>Sylvilagus palustris</i>
Marsh rice rat	<i>Oryzomys palustris</i>
Northern yellow bat	<i>Lasiurus i. floridanus</i>
Opossum	<i>Didelphis marsupialis</i>
Raccoon	<i>Procyon lotor</i>
River otter	<i>Lontra Canadensis</i>
Round-tailed muskrat	<i>Neofiber alleni</i>
Seminole bat	<i>Lasiurus seminolus</i>
Sherman's fox squirrel	<i>Sciurus niger shermani</i>
Striped skunk	<i>Mephitis mephitis</i>
Whitetail deer	<i>Odocoileus virginianus</i>

4536 * Endangered (federal).

4537 Table F-7. Status and hydrologic requirements of foraging and breeding wetland-obligate mammals
4538 of the Kissimmee River.

Common Name	Scientific Name	Status	Foraging Habitat Type	Foraging Hydrologic Requirements	Breeding Habitat Type	Breeding Hydrologic Requirements
Carnivora, Mustelidae						
River otter	<i>Lutra canadensis</i>	R	All, OW	0-10 m near permanent water	All (burrows, hollows)	Adjacent to permanent water
Rodentia, Cricetidae						
Marsh rice rat	<i>Oryzomys palustris</i>	R	BLM, WP, WS	<1 m	BLM, WP, WS	>30 cm above high water
Round-tailed muskrat	<i>Neofiber alleni</i>	R	BLM, WP, WS	15-46 cm	BLM, WP, WS	15-46 cm
Lagomorpha, Leporidae						
Marsh rabbit	<i>Sylvilagus palustris</i>	R	All	<1 m	All	Adjacent to water

4539 BLM = Broadleaf Marsh; OW = Open Water; R = breeding resident; WP = Wet Prairie; WS = Wet Shrub.

4540 Foraging and breeding habitat hydrologic requirements obtained from Birkenholz (1972), Chapman and Willner (1981), Wolfe
4541 (1982), and Lariviere and Walton (1998).

LITERATURE CITED

- Barbour, M.G. and W.D. Billings. 2000. *North American Terrestrial Vegetation*, Second Edition. Cambridge University Press, Cambridge, United Kingdom and New York, NY.
- Belwood, J. 1992. *Florida Mastiff Bat*, *Eumops glaucinus floridanus*, pp. 216-223. In: S.R. Humphrey (ed.), *Rare and Endangered Biota of Florida*, Volume I, Mammals. University Press of Florida, Gainesville, FL.
- Birkenholz, D.E. 1972. *Neofiber alleni*. *The American Society of Mammalogists* 15:4.
- Bousquin, S.G. and L.L. Carnal. 2005. *Chapter 9: Classification of the Vegetation of the Kissimmee River and Floodplain*. In: S.G. Bousquin, D.H. Anderson, G.E. Williams, and D.J. Colangelo (eds.), *Kissimmee River Restoration Studies, Volume I, Establishing a Baseline: Pre-Restoration Studies of the Channelized Kissimmee River*. Technical Publication ERA 432. South Florida Water Management District, West Palm Beach, FL.
- Bousquin, S.G., D.H. Anderson, D.J. Colangelo, and G.E. Williams. 2005. *Introduction to Baseline Studies of the Channelized Kissimmee River*. In: S.G. Bousquin, D.H. Anderson, G.E. Williams and D.J. Colangelo (eds.), *Kissimmee River Restoration Studies, Volume I, Establishing a Baseline: Pre-Restoration Studies of the Channelized Kissimmee River*. Technical Publication ERA 432. South Florida Water Management District, West Palm Beach, FL.
- Brodman, R., M. Parrish, H. Kraus, and S. Cortwright. 2006. *Amphibian biodiversity recovery in a large-scale ecosystem restoration*. *Herpetological Conservation and Biology* 1:101-108.
- Carnal, L.L. 2005a. *Expectation 12: Areal Coverage of Floodplain Wetlands*. In: D.H. Anderson, S.G. Bousquin, G.E. Williams, and D.J. Colangelo (eds.), *Kissimmee River Restoration Studies, Volume II, Defining Success: Expectations for the Kissimmee River Restoration*. Technical Publication ERA 433. South Florida Water Management District, West Palm Beach, FL.
- Carnal, L.L. 2005b. *Expectation 13: Areal Coverage of Broadleaf Marsh*. In: D.H. Anderson, S.G. Bousquin, G.E. Williams, and D.J. Colangelo (eds.), *Kissimmee River Restoration Studies, Volume II, Defining Success: Expectations for the Kissimmee River Restoration*. Technical Publication ERA 433. South Florida Water Management District, West Palm Beach, FL.
- Carnal, L.L. and S.G. Bousquin. 2005. *Chapter 10: Areal Coverage of Floodplain Plant Communities in Pool C of the channelized Kissimmee River*. In: S.G. Bousquin, D.H. Anderson, G.E. Williams, and D.J. Colangelo (eds.), *Kissimmee River Restoration Studies, Volume I, Establishing a Baseline: Pre-Restoration Studies of the Channelized Kissimmee River*. Technical Publication ERA 432. South Florida Water Management District, West Palm Beach, FL.
- Carr, A.F. 1940. *A Contribution to the Herpetology of Florida*. Biological Science Series 3(1). University of Florida, Gainesville, FL.
- Chapman, J.A. and G.R. Willner. 1981. *Sylvilagus palustris*. *The American Society of Mammalogists* 153:3.
- Davis, J.H. 1943. *The Natural Features of Southern Florida, Especially the Vegetation, and the Everglades*. Geological Bulletin Number 25. Florida Geological Survey, State of Florida Department of Conservation, Tallahassee, FL.

- 4581 Duever, M.J. 1990. *The long-term variability of restored wetlands*, pp. 279-289. In: M.K. Loftin, L.A. Toth,
4582 and J.T.B. Obeysekera (eds.), *Proceedings Kissimmee River Restoration Symposium*. South
4583 Florida Water Management District, West Palm Beach, FL.
- 4584 Duever, M.J., J.E. Carlson, L.A. Riopelle, and L.C. Duever. 1978. *Ecosystem Analyses at Corkscrew*
4585 *Swamp*, pp. 534-565. In: H.T. Odum and K.C. Ewel (eds.), *Cypress Wetlands for Water*
4586 *Management, Recycling and Conservation*. Fourth annual report to National Science Foundation
4587 Program of Research Applied to National Needs and the Rockefeller Foundation, Center for
4588 Wetlands, University of Florida, Gainesville, FL.
- 4589 Florida Fish and Wildlife Conservation Commission. 2003. *Florida's Breeding Bird Atlas: A Collaborative*
4590 *Study of Florida's Birdlife*. Florida Fish and Wildlife Conservation Commission.
- 4591 Florida Fish and Wildlife Conservation Commission. 2018. *Florida's Endangered Species, Threatened*
4592 *Species and Species of Special Concern*. Florida Fish and Wildlife Conservation Commission.
- 4593 Florida Natural Areas Inventory. 1990. *Guide to the Natural Communities of Florida*. Florida Natural Areas
4594 Inventory, Florida Department of Natural Resources, Tallahassee, FL.
- 4595 Franz, R., D. Maehr, A. Kinlaw, C. O'Brien, and R.D. Owen. 2000. *Amphibians and Reptiles of the*
4596 *Bombing Range Ridge, Avon Park Air Force Range, Highlands and Polk Counties, Florida*. Florida
4597 Museum of Natural History, Gainesville, FL.
- 4598 Frederick, P.C. and M.G. Spalding. 1994. *Factors affecting reproductive success of wading birds*
4599 *(Ciconiiformes) in the Everglades ecosystem*, pp. 659-691. In: S. Davis and J.C. Ogden (eds.),
4600 *Everglades: The Ecosystem and its Restoration*. St. Lucie Press, Delray Beach, FL.
- 4601 Gladden, J.E. and L.A. Smock. 1990. *Macroinvertebrate distribution and production on the floodplains of*
4602 *two lowland headwater streams*. *Freshwater Biology* 24:533-545.
- 4603 Glenn, J.L., III and D.A. Arrington. 2005. *Chapter 13. Status of Fish Assemblages of the Kissimmee River*
4604 *Prior to Restoration: Baseline Conditions and Expectations for Restoration*. In: S.G. Bousquin,
4605 D.H. Anderson, G.E. Williams, and D.J. Colangelo (eds.), *Kissimmee River Restoration Studies*,
4606 Volume I, *Establishing a Baseline: Pre-Restoration Studies of the Channelized Kissimmee River*.
4607 Technical Publication ERA 432. South Florida Water Management District, West Palm Beach, FL.
- 4608 Goodrick, R.L. and J.F. Milleson. 1984. *Studies of the Floodplain Vegetation and Water Level Fluctuation*
4609 *in the Kissimmee River Valley*. Technical Publication 74-2 (DRE-40). South Florida Water
4610 Management District, West Palm Beach, FL.
- 4611 Guillemain, M., H. Fritz, and N. Guillon. 2000. *Foraging behavior and habitat choice of wintering northern*
4612 *shoveler in a major wintering quarter in France*. *Waterbirds* 23(3):353-363.
- 4613 Knutson, M.G., W.B. Richardson, D.M. Reineke, B.R. Gray, J.R. Parmelee, and S.E. Weick. 2004.
4614 *Agricultural ponds support amphibian populations*. *Ecological Applications* 14(3):669-684.

- 4615 Koebel, J.W., Jr., J.L. Glenn III, and R.H. Carroll IV. 2005. *Chapter 12: Amphibian and Reptile*
4616 *Communities of the Lower Kissimmee River Basin Prior to Restoration: Baseline and Reference*
4617 *Conditions and Expectations for Restoration*. In: S.G. Bousquin, D.H. Anderson, G.E. Williams,
4618 and D.J. Colangelo (eds.), Kissimmee River Restoration Studies, Volume I, Establishing a
4619 Baseline: Pre-Restoration Studies of the Channelized Kissimmee River. Technical Publication
4620 ERA 432. South Florida Water Management District, West Palm Beach, FL.
- 4621 Kushlan, J.A. 1990. *Freshwater Marshes*, pp. 324-263. In: R.L. Myers and J.J. Ewel (eds.), *Ecosystems of*
4622 *Florida*. University of Central Florida Press, Orlando, FL.
- 4623 Lariviere, S. and L. Walton. 1998. *Lontra canadensis*. Mammalian Species No. 587:8. The American
4624 Society of Mammalogists.
- 4625 Lehtinen, R. and S.M. Galatowitsch. 2001. *Colonization of restored wetlands by amphibians in Minnesota*.
4626 *American Midland Naturalist* 145:388-396.
- 4627 Lowe, E.F. 1986. *The relationship between hydrology and vegetational pattern within the floodplain marsh*
4628 *of a subtropical, Florida lake*. *Florida Scientist* 49:213-233.
- 4629 Marks, C. and G. Marks. 2008. *Bat Conservation and Land Management: Kissimmee River Wildlife*
4630 *Management Area*. The Florida Bat Conservancy, Bay Pines, FL.
- 4631 Milleson, J.F., R.L. Goodrick, and J.A. Van Arman. 1980. *Plant Communities of the Kissimmee River*
4632 *Valley*. Technical Publication 80-7. South Florida Water Management District, West Palm Beach,
4633 FL.
- 4634 Pechmann, J.H.K., D.E. Scott, J.W. Gibbons, and R.D. Semlitsch. 1989. *Influence of wetland hydroperiod*
4635 *on diversity and abundance of metamorphosing juvenile amphibians*. *Wetlands Ecology and*
4636 *Management* 1:3-11.
- 4637 Petranka, J.W., S.S. Murray, and C.A. Kennedy. 2003. *Responses of amphibians to restoration of a*
4638 *southern Appalachian wetland: perturbations confound post-restoration assessment*. *Wetlands*
4639 23:278-290.
- 4640 Pierce, G.J., A.B. Amerson, and L.R. Becker. 1982. *Final Report: Pre-1960 Floodplain Vegetation of the*
4641 *Lower Kissimmee River Valley, Florida*. Biological Services Report 82-3, United States Army
4642 Corps of Engineers, Jacksonville, FL.
- 4643 Poole, A. (ed.). 2008. *The Birds of North America Online*. Cornell Lab of Ornithology, Ithaca, NY.
4644 Available online at <http://bna.birds.cornell.edu.bnaproxy.birds.cornell.edu/bna>.
- 4645 Powell, G. 1987. *Habitat use by wading birds in a subtropical estuary: Implications of hydrography*. *The*
4646 *Auk* 104:740-749.
- 4647 Richardson, C.J. 2000. *Chapter 12: Freshwater Wetlands*, pp. 488-499. In: M.G. Barbour and W.D. Billings
4648 (eds.), *North American Terrestrial Vegetation*, Second Edition. Cambridge University Press,
4649 Cambridge, UK.
- 4650 Scheaffer, W.A. and J.G. Nickum. 1986. *Backwater areas as nursery habitats for fishes in Pool 13 of the*
4651 *Upper Mississippi River*. *Hydrobiologia* 136:131-140.

- 4652 Schomer, N.S. and R.D. Drew. 1982. *An Ecological Characterization of the Lower Everglades, Florida*
4653 *Bay, and the Florida Keys*. FWS/OBS-82/58, United States Fish and Wildlife Service for the United
4654 States Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Office,
4655 Metairie, LA. NTIS Number PB83-141978.
- 4656 Spencer, L. and S. Bousquin. 2014. *Interim responses of floodplain wetland vegetation to Phase I of the*
4657 *Kissimmee River Restoration Project: Comparisons of vegetation maps from five periods in the*
4658 *river's history*. Restoration Ecology 22(3):397-408.
- 4659 Stevens, C.E., A.W. Diamond, and T.S. Gabor. 2002. *Anuran call surveys on small wetlands in Prince*
4660 *Edward Island, Canada Restored by dredging of sediments*. Wetlands 22(1):90-99.
- 4661 Stys, B. 1997. *Ecology of the Florida Sandhill Crane*. Nongame Wildlife Technical Report Number 15.
4662 Florida Game and Freshwater Fish Commission, Tallahassee, FL.
- 4663 Toth, L.A. 1991. *Environmental Responses to the Kissimmee River Demonstration Project*. Technical
4664 Publication 91-02. South Florida Water Management District, West Palm Beach, FL.
- 4665 Toth, L.A. 1993. *The ecological basis of the Kissimmee River Restoration Plan*. Florida Scientist 56:25-51.
- 4666 Toth, L.A., D.A. Arrington, M.A. Brady, and D.A. Muszick. 1995. *Conceptual evaluation of factors*
4667 *potentially affecting restoration of habitat structure within the channelized Kissimmee River*
4668 *ecosystem*. Restoration Ecology 3:160-180.
- 4669 Toth, L.A., S.L. Melvin, D.A. Arrington, and J. Chamberlain. 1998. *Hydrologic manipulations of the*
4670 *channelized Kissimmee River*. Bioscience 48:757-764.
- 4671 Trexler, J.C. 1995. Restoration of the Kissimmee River: a conceptual model of past and present fish
4672 communities and its consequences for evaluating restoration success. Restoration Ecology 3:195-
4673 210.
- 4674 United States Army Corps of Engineers. 1996. *Central and Southern Florida Project Kissimmee River*
4675 *Headwaters Revitalization Project Integrated Project Modification Report and Supplement to the*
4676 *Final Environmental Impact Statement*. United States Army Corps of Engineers, Jacksonville, FL.
4677 January 1996.
- 4678 United States National Vegetation Classification System. 2008. *International Ecological Classification*
4679 *Standard: Terrestrial Ecological Classifications, International Vegetation Classification*.
4680 NatureServe Central Databases, Arlington, VA. Searchable online database of United States
4681 National Vegetation Classification System and International Vegetation Classification Community
4682 Types and Association Descriptions. Available online at
4683 <http://www.natureserve.org/explorer/servlet/NatureServe>.
- 4684 Wade, D.D., J.J. Ewel, and R.H. Hofstetter. 1980. *Fire in South Florida Ecosystems*. Forest Service General
4685 Technical Report SE-17. Southeastern Forest Experiment Station, Ashville, NC.
- 4686 Wetzel, P.R. 2001. *Plant Community Parameter Estimates and Documentation for the Across Trophic Level*
4687 *System Simulation (ATLSS)*. Data report prepared for the ATLSS Project Team, The Institute of
4688 Environmental Modeling, University of Tennessee–Knoxville, Knoxville, TN.

4689 Willard, D.E. 1977. *The feeding ecology and behavior of five species of herons in southeastern New Jersey*.
4690 The Condor 79:462-470.

4691 Wolfe, J.L. 1982. *Oryzomys palustris*. Mammalian Species Number 176:5. The American Society of
4692 Mammalogists.

DRAFT